

tinyMicon MatisseCORE™

matisseye™-adapter pro User's Guide

Debug adapter for Matisse

Revision history

Date	Version	Remarks
2024/01/23	Rev.001	First release

Table of Contents

For Safety.....4

1. Overview.....6

 1.1. What is matiseye™-adapter pro?6

 1.2. Names7

 1.3. Contents8

 1.4. Ratings.....8

 1.5. Debug I/F Terminal8

 1.6. The method for removing the case9

2. Description of functions..... 10

 2.1. How to Use 10

 2.2. Details of functions 10

3. Specifications 13

4. References 13

5. Trademarks..... 14

6. Initial Defects & Repairs 14

For Safety

Please read the following content first and make sure you fully understand the instructions before using the product for your safety. Additionally, this product is intended only for research and development, demonstration, and evaluation purposes, and is not a final product suitable for general consumer use. Therefore, please do not use this product, in whole or in part, as a final product. This product should only be used by professionals familiar with the risks associated with handling electrical and mechanical parts, solely for the purposes of research and development, demonstration, and evaluation.

•MEANING OF THE DISPLAY



Indicates content that may lead to loss of life or serious injury.



Indicates content that may lead to minor injuries or damage to property.

•MEANIG OF THE SYMBOLS





Indicates prohibited actions.





Indicates instructions for actions that should be taken.

 **WARNING**

	<ul style="list-style-type: none"> • Do not disassemble or modify beyond what is described in the user's guide. It may cause fire or electric shock. • Do not put water or foreign objects inside. It may cause fire or electric shock. • Do not use the main unit or cables when they are damaged. It may cause fire or electric shock. • Do not use with wet hands. It may cause electric shock.
	<ul style="list-style-type: none"> • Please connect cables correctly and securely. Incorrect connection may cause fire or electric shock. • If you suspect a malfunction, stop using the device immediately, unplug the cables, and turn off the power. Continuing to use a malfunctioning device may cause fire or electric shock. • If you notice smoke or a strange smell, stop using the device immediately, unplug the cables, and turn off the power. This may prevent fire or electric shock.

 **CAUTION**

	<ul style="list-style-type: none"> • Please do not use in places where water droplets, humidity, or dust are prevalent. It may cause fire or electric shock. • Do not use inside a car during the summer or under direct sunlight. High temperatures may cause fire, electric shock, or malfunction. • Do not place the product in unstable locations. It may cause the product to touch the body, leading to electric shock or injury. • Do not use in places with significant vibration or where corrosive gases are generated. It may cause fire, electric shock, or malfunction.
	<ul style="list-style-type: none"> • Properly arrange the main unit and cables. Careless disconnection or snagging of cables may cause injury. • Please use the cables and accessories provided. Using others may cause fire, electric shock, or malfunction. • When not in use for an extended period, unplug the cables and turn off the power. It may cause fire.

1. Overview

1.1. What is matiseye™-adapter pro?

The matiseye™-adapter pro is a debug adapter used for the development, debugging, and programming of ICs for programs operating on the Matisse CPU core. It is used by connecting to a PC with the matiseye™-studio integrated development environment installed and an IC equipped with the Matisse core. The proprietary Matisse debug I/F enables No-break (NB) access, which reads the state of the IC's internal registers quickly without disturbing the CPU operation. Additionally, the values of the read registers can be graphically confirmed using the dedicated software RapidScope™.

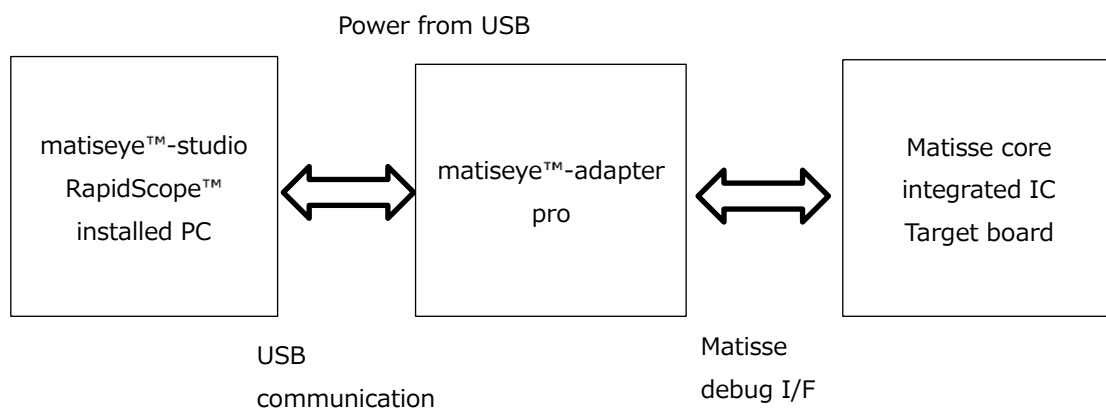


Figure 1. matiseye™-adapter pro overview

1.2. Names



Figure 2. Top

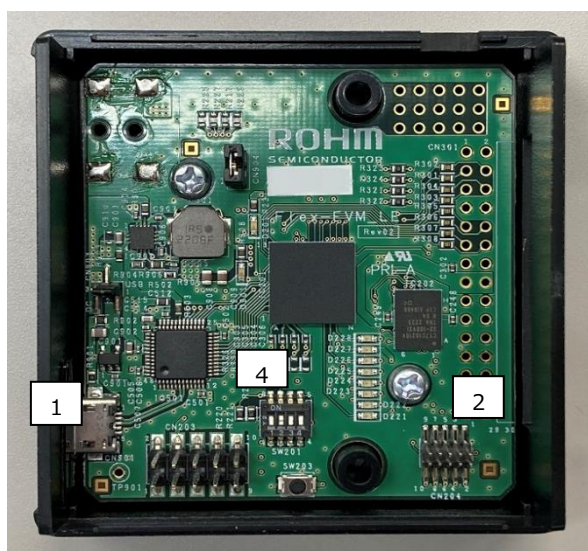


Figure 3. Inside

Table 1. Name and functions of the main unit

No	Name	Function
1	USB Terminal	Terminal for connecting the PC and matischeye™-adapter
2	Debug I/F Terminal	Terminal for connecting the matischeye™-adapter and the target.
3	COM lamp	Illuminates in debug mode.
4	Slide switch	Switch for settings.

1.3. Contents

- matiseye™-adapter pro main unit
- 1.27mm pitch flat cable
- USB cable(Type-A/Micro-B)

1.4. Ratings

- Power Supply

The power supply operates at 5V provided by USB bus power.

- IO Voltage

The I/O voltage of the Matisse debug I/F is fixed at 3.3V.

1.5. Debug I/F Terminal

The pin configuration for the Debug I/F terminal to connect to the target board is as follows. Please refer to the pin configuration below when designing the target board. Additionally, a pull-up resistor is required for DBDATA, and a pull-down resistor is required for DBCLK. Please prepare these on the target board.

Table 2. Debug I/F terminal description

No.	Name	Remarks	No.	Name	Remarks
1	VCC		2	DBDATA	Pull up 100kohm required
3	GND		4	DBCLK	Pull down 22kohm required
5	GND		6	Reserved	
7	Reserved		8	Reserved	
9	GND		10	Reserved	



Figure 4. Debug I/F Terminal and cable direction

1.6. The method for removing the case

By unscrewing the two screws on the back of the case and opening the top cover, you can access the circuit board. This allows you to set switches, such as the operation mode, on the board. When opening the top cover, please be careful not to damage the components of the LED area.

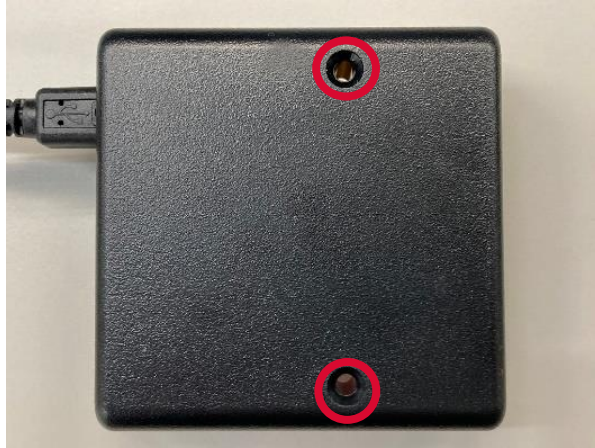


Figure 5. Positions of the screws

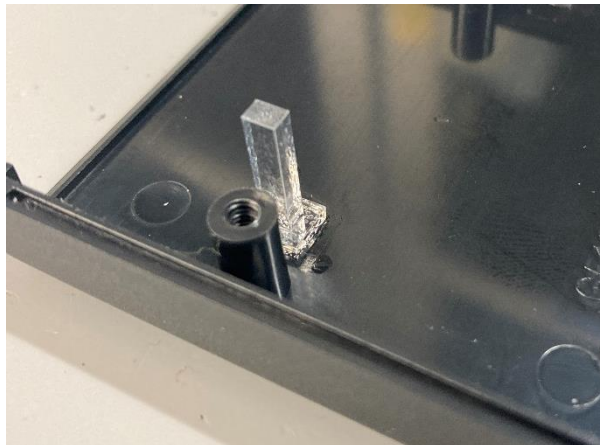


Figure 6. Bottom side of the top cover(LED area)

2. Description of functions

2.1. How to Use

- ① Connect the flat cable to the target board.
- ② Connect the USB cable to the PC.
- ③ Launch matischeye™-studio. When the debug adapter is recognized, the COM lamp will light up. The COM lamp will flash when the PC and matischeye™-adapter pro are communicating. For instructions on software operation, please refer to the matischeye™-studio user's guide.

2.2. Details of functions

① Debug I/F Terminal

This terminal is used to connect to the target board. The pin configuration and connection to the microcontroller are as follows. The Reserved pins will be used for future expansions of the main unit's functions.

Table 3. Signal name of Debug I/F

CN102 pin No.	Signal name
1	VCC
2	DBDATA
3	GND
4	DBCLK
5	GND
6	Reserved
7	Reserved
8	Reserved
9	GND
10	Reserved

② LED

The LEDs on the matischeye™-adapter pro indicate the status of the device. During debugging operations and firmware updates, different LEDs will light up. The LEDs that light up are as follows:

Table 4. Name and color of LED

LED part No.	Color	Description
D221	Yellow	In Debugger mode
D222	Yellow	In Firmware update mode

③ Slide switch

The slide switch will be used for future expansions of the main unit's functions. Switch No.2 can be turned ON to update the firmware of the matiseye™-adapter pro via USB. For details, please refer to section 2.3.

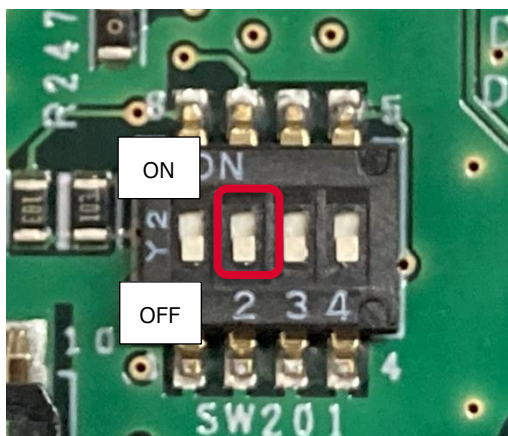


Figure 7. Slide switch

Table 5. Functions of Slide switch

Parts No.	No.	description
SW201	1	Reserved
	2	Switch to ON for Firmware update mode.
	3	Reserved
	4	Reserved

⑤ USB communication

The main unit is powered and communicates with the PC via USB. Installing the driver is necessary for communication.

Furthermore, by using the updater, the firmware of the matiseye™-adapter pro can be updated from the PC. For details, please refer to the updater manual.

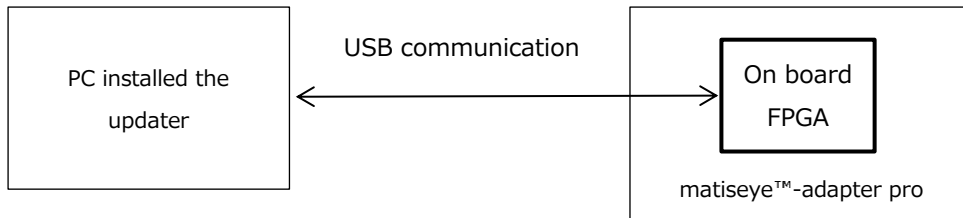


Figure 8. Firmware update overview

Procedure:

- Turn ON the slide switch No.2 on the matiseye™-adapter pro.
- Connect the USB cable.
- Launch the updater and update the software.
- Return the slide switch on the matiseye™-adapter pro to its original position.

3. Specifications

Item	Description
Power supply Voltage	5V (USB Bus power)
USB Terminal	Micro USB B Terminal
Debug I/F Terminal	2*5pin 1.27mm pitch
LED	1pcs (COM)
Matisse debug I/F maximum frequency	25MHz
Dimensions	6.5mm*28mm*66.5mm (W*H*D)
Weight	62g
Accessories	1.27mmpitch flat cable USB cable(Type-A/Micro-B)

4. References

For the information about the integrated development environment matiseye™-studio, please refer to the matiseye™-studio User's Guide."

5. Trademarks

[tinyMicon MatisseCORE™][matiseye™][RapidScope™] are trademarks or registered trademarks of ROHM Co., Ltd.

6. Initial Defects & Repairs

If this product is damaged or does not operate as specified in this user's guide before it is used, please return it to us within 30 days of receipt, and we will replace it free of charge if we determine that an exchange is necessary. Furthermore, if the product fails despite being used within the scope specified in this user's guide, we will repair or replace it free of charge within one year of receipt.

Caution

1. The information written in these materials regarding ROHM's products (hereinafter "Product") and the contents of the materials is current as of the date of the material's issuance, and may be changed by ROHM, at any time and for any reason, without prior notice.
2. If you plan to use the Product in connection with any equipment or device (such as the medical equipment, transportation equipment, traffic equipment, aerospace equipment, nuclear power control equipment, vehicle equipment including the fuel control system and/or car accessories, and/or various kinds of safety devices etc.) which require extremely high reliability, and whose breakdown or malfunction relate to the risk of personal injury or death, or any other serious damage (such usage is hereinafter called "Special Usage"), you must first consult with the ROHM's sales representative. ROHM is not responsible for any loss, injury or damage etc. incurred by you or any other third party caused by any Special Usage without ROHM's prior written approval.
3. Electronic components, including semiconductors, can fail or malfunction at a certain rate. You are required to implement adequate safety measures including, but not limited to, fail-safe design against physical injury, and damage to any property, which may result from a failure or malfunction of the Products.
4. You agree that application notes, reference designs, and associated data and information contained in this material are presented only as guidance for use of the Products. Therefore, you are solely responsible for your reliance any such materials and you must exercise your own independent verification and judgment in the use of such information contained in such materials. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.
5. The Products are not subject to radiation-proof design.
6. Since the Product and/or these materials contain confidential information of ROHM, technical information, and/or trade secrets, you are prohibited from engaging in any of the following acts in whole or part without ROHM's prior written approval:
 - (i) disclosing Product(s), these materials, or results of testing to any third party;
 - (ii) disassembling, reverse engineering, and/or any other analysis;
 - (iii) reprinting, copy, and/or reproduction; or
 - (iv) removing any trademark or logo from the Product
7. When exporting the Product, the technology and/or information written in these materials, you are required to follow the applicable export control laws and regulations such as "Foreign Exchange and Foreign Trade Act" and/or "Export Administration Regulations (EAR)".
8. All information and data including, but not limited to, application examples contained in these materials are for reference only. ROHM disclaims all warranties, statutory or otherwise, and ROHM does not warrant that the foregoing information or data will not infringe any intellectual property rights, or any other rights of any third party regarding such information or data. Moreover, no license, whether expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this material.
9. ROHM does not warrant that the information contained herein is error-free. ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties resulting from errors contained in these materials.



Thank you for your using ROHM product.
For inquiries about our products, please contact us.

ROHM Customer Support System

<https://www.rohm.co.jp/contactus>