

DC/DC Converter

DC/DC Converter Selection Guide

Ver.10.1

ROHM
SEMICONDUCTOR



Power

INDEX

New Products

Ultra-Low-Power Switching Regulator	P.02
60V Max Input High Buck Ratio Switching Regulator	P.03
12V Input High Efficiency 3A Switching Regulator	P.04
Ultra-Small-size Low Ringing Switching Regulators	P.05
Small-size High Output Current Switching Regulator	P.07
Wide Input Voltage Range Buck Switching Regulators	P.08
Low Current Low Input Voltage Switching Regulator	P.09
Wide Input Voltage Range Boost Switching Regulator	P.10

Recommended Products

BD9x Family Lineup	P.11
3.3V/5V Input Buck Converters	P.13
12V Input Buck Converters	P.15
24V Input Buck Converters	P.17
Wide Input Voltage 24V/48V/60V Buck Converters	P.19
56V(Max) Input Buck Controller	P.21
Isolated Flyback Converters	P.23

Selection Guide

Single Output Buck Converters	P.25
Dual-Output Buck Converters	P.33
Buck Controllers	P.33
Boost Converters	P.35
Boost Controllers	P.35
Isolated DC/DC Power Supplies	P.37

Guide to ROHM' s Website [P.38](#)

*Before using the ICs, please verify the numerical values, data, and functions listed in the latest datasheet.


Ultra-Low-Power Switching Regulator

The BD70522GUL utilizes ROHM's ultra-low power technology Nano Energy[®] to achieve a quiescent operating current consumption of just 180nA. This significantly improves standby power efficiency, making it possible to prolong battery life in portable and wearable devices.

Product Example


BD70522GUL

- Input voltage : 2.5V to 5.5V
- Output voltage : 1.2V to 3.3V
- Output voltage accuracy : $\pm 2.5\%$
- Output current : 500mA
- Quiescent operating current : 180nA
- Standby current : 50nA
- >90% efficiency at 10 μ A output
- Output voltage setting via pin selection
1.2V/1.5V/1.8V/2.0V/2.5V/2.8V/3.0V/3.2V/3.3V
- Power Good output
- 100% duty operation
- Output discharge function
- Multiple protection circuits
Over Current Protection(OCP), Thermal Shutdown(TSD),
Under Voltage Lock Out(UVLO)

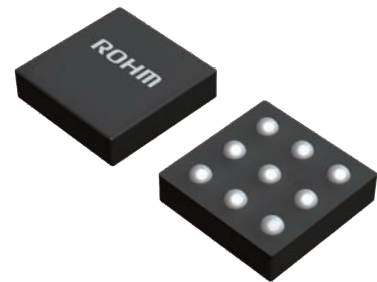


Small-size CSP(Chip Scale Package)
VCSP50L1C
1.76mm(Typ)×1.56mm(Typ)×0.57mm(Max)

BD70522GUL Application Circuit Diagram

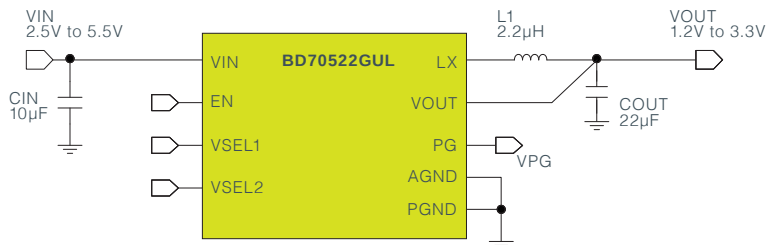

PCB
7mm×11mm

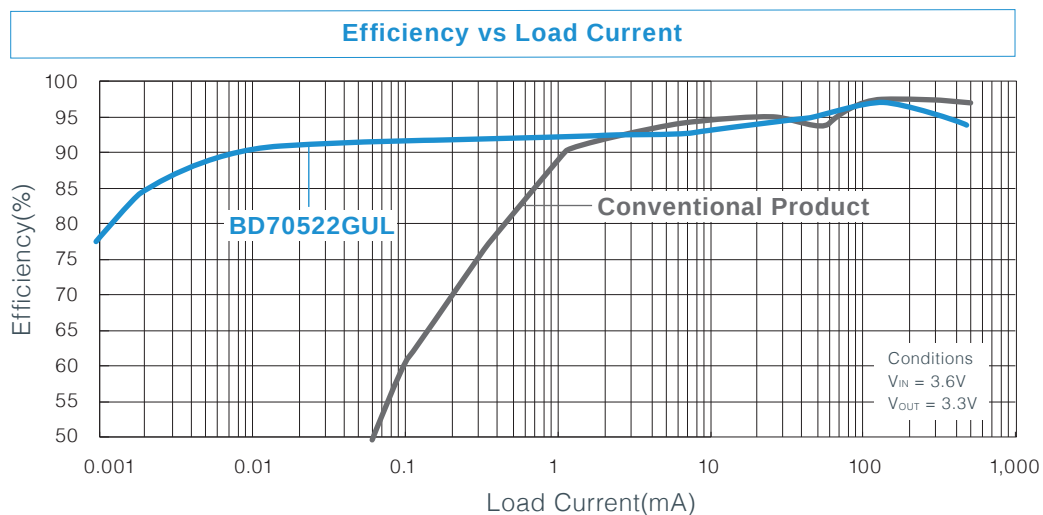


*Nano Energy[®] is a registered trademark of ROHM Co., Ltd.

60V Max Input High Buck Ratio Switching Regulator

Power supply solution ideal for industrial equipment

The BD9V101MUF-LB utilizes ROHM's ultra-fast pulse control technology Nano Pulse Control®* to achieve a high step-down ratio of up to 24:1 at 2MHz. For example, 2.5V output is possible from a 60V power supply at 2MHz. This makes it possible to reduce the number of power ICs required for step-down from high voltage to low voltage from two or more with conventional solutions to just one, contributing to set miniaturization and simpler system design.

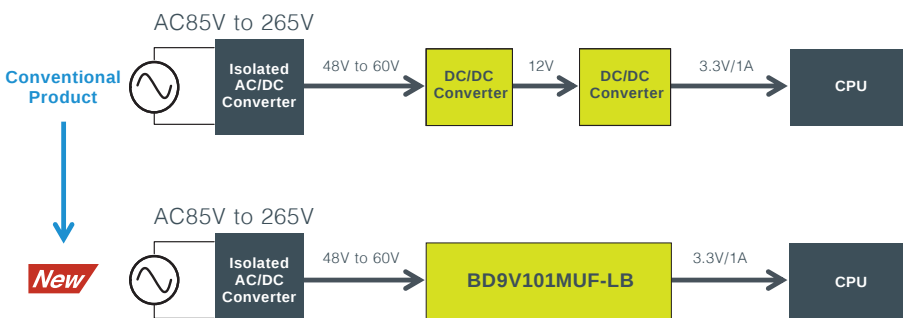



Product Example

BD9V101MUF-LB


- Stable long term supply demanded for industrial equipment
- High buck ratio enables direct conversion from high voltage to low voltage
- The industry's lowest switching ON time : 9ns Typ, 20ns Max
- Input voltage : 16V to 60V(70V rating)
- Output voltage : 0.8V to 5.5V
- Reference voltage : $0.8V \pm 2.0\%$
- Output current : 1.0A
- High-speed response via current mode control
- Synchronous rectification eliminates the need for an external diode
- Soft start prevents inrush current during power ON
- Power Good output

- Multiple protection functions
Over Current Protection(OCP),
Short-Circuit Protection(SCP),
Thermal shutdown(TSD),
Under Voltage Lock Out(UVLO),
Over Voltage Protection(OVP),
Over Voltage Lock Out(OVLO)

BD9V101MUF-LB Application Circuit Diagram

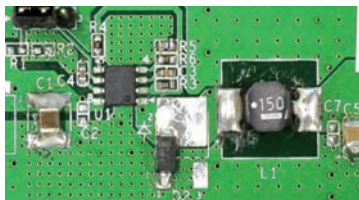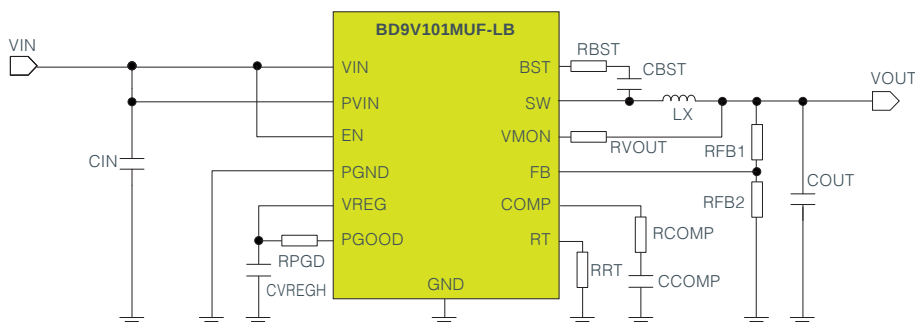

Conventional PCB
47mm×25mm=1,175mm²



BD9V101MUF-LB PCB
18mm×20mm=360mm²

→ -69%


Increasing the switching frequency to 2MHz reduces the size of external components (coil), decreasing mounting area. Further space savings can be achieved by switching from a 2-stage buck configuration to single stage conversion. Also, the 2MHz switching frequency is guaranteed to not affect the AM radio band (MW).

Part No.	Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions								Operating Temperature (°C)	Package
							Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Over Voltage Protection		
BD9V101MUF-LB	70	1	16 to 60	0.8 to 5.5	1.9 to 2.3	Current	✓	—	—	✓	—	Recovery	Recovery	Recovery	T _J −40 to +150	VQFN24FV4040

Ultra-High-Speed Pulse Control Technology: Nano Pulse Control®*

Buck switching DC/DC converters generate an output voltage by controlling the switching pulse width. This pulse width is thicker when the step-down ratio of the input/output voltage is low and thinner when this ratio is high. As a result, when stepping down from a 60V power supply to 2.5V, the switching pulse width becomes extremely thin since the buck ratio is high (24:1). For example, when the switching frequency is 2MHz the switching cycle is 500ns, so with a step-down ratio of 24:1 the pulse width becomes ultra-narrow at 20.8ns. ROHM's Nano Pulse Control® technology achieves a pulse width of just 9ns.

Current mode control detects the current flowing through the coil, but when the pulse width narrows accurate current detection is prevented due to ringing caused by the parasitic inductance within the circuit, resulting in unstable circuit operation. ROHM's original Nano Pulse Control® technology eliminates the effects of ringing by feeding back the coil current to the IC, making it possible to stabilize the output voltage even with narrow pulse widths using current mode control.

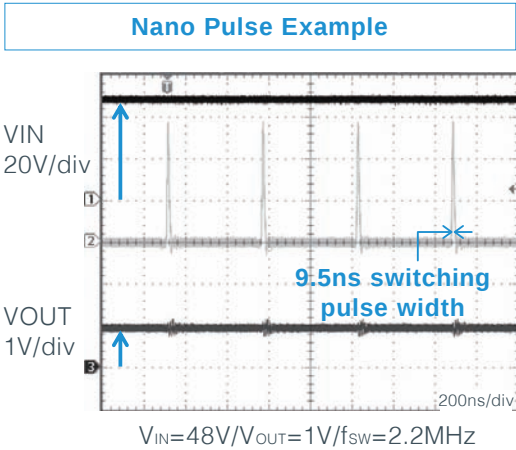

*Nano Pulse Control® is a registered trademark of ROHM Co., Ltd.

12V Input High Efficiency 3A Switching Regulator


The BD9D300MUV features a wide voltage range from 4V to 17V, ensuring support for both 9V and 12V applications. In addition, low standby current (20μA) maintains high efficiency even during standby. And depending on the output current, users can select between continuous switching mode and a mode that performs automatic switching control to achieve high efficiency.

Product Example


BD9D300MUV

- Input voltage range : 4.0V to 17V
 - Output voltage range : 0.9V to 5.25V
 - Reference voltage : 0.8V±1.0%
 - Output current : 3.0A
 - Switching frequency : 1.25MHz
 - Built-in Power MOSFETs High-side:110mΩ Low-side:50mΩ
 - Quiescent current : 20μA(Typ)
 - High-speed load response through ON-time control
- Synchronous rectification eliminates the need for external diodes
 - Automatically switches to power-saving operation at light loads
 - 100% duty operation
 - Externally configurable soft start
 - Power Good pin
 - Multiple protection functions OCP, SCP, OVP, TSD, UVLO

BD9D300MUV Application Circuit Diagram

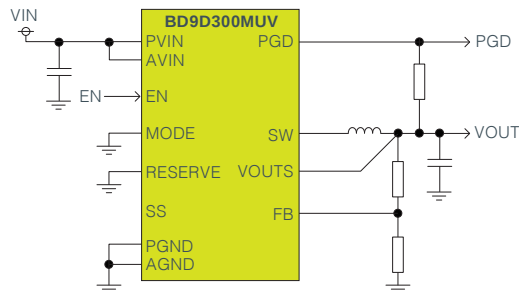

Efficiency vs Load Current



Part No.	Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions							Operating Temperature (°C)	Package
							Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Over Voltage Protection	
BD9D300MUV	20	3	4.0 to 17	0.9 to 5.25 (V _{IN} ×0.125) to V _{IN}	1.25	ON Time	✓	—	✓	✓	✓	Recovery	Recovery	Latch	T _J −40 to +85 VQFN016V3030

Ultra-Small-size Low Ringing Switching Regulators


The BD9A302QWZ, BD9B304QWZ, BD9B305QUZ, BD9D322QWZ, and BD9D323QWZ deliver 3A output in an ultra-small-size 2mm x 2mm package. In addition to reducing mounting area, the ultra-small-size form factor decreases parasitic inductance within the circuit and reduces the loop trace area where the change in switching current on the PCB is large, minimizing switching waveform ringing along with unnecessary radiation. The BD9B305QUZ also leverages low quiescent current consumption to achieve high efficiency (>80%) over a wide range of load currents.

Product Example


BD9B305QUZ

- Input voltage range : 2.7V to 5.5V
- Output voltage range : 0.6V to $V_{IN} \times 0.8$
- Reference voltage : $0.6V \pm 1.5\%$
- Output current : 3.0A
- Switching frequency : 1MHz
- Built-In switching FET : 50mΩ, 40mΩ
- Quiescent current : 15μA (Typ)
- Fast transient response characteristics via fixed ON time control
- Automatically switches to power-saving operation at light loads
- Synchronous rectification eliminates the need for external diodes
- Output discharge function
- Variable Soft Start
- Power Good output
- Multiple protection functions
OCP, SCP, OVP, TSD, UVLO

BD9B305QUZ Application Circuit Diagram

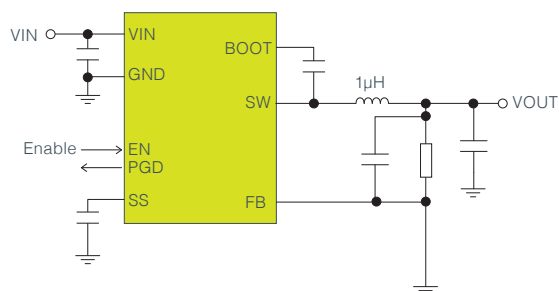

Efficiency vs Load Current

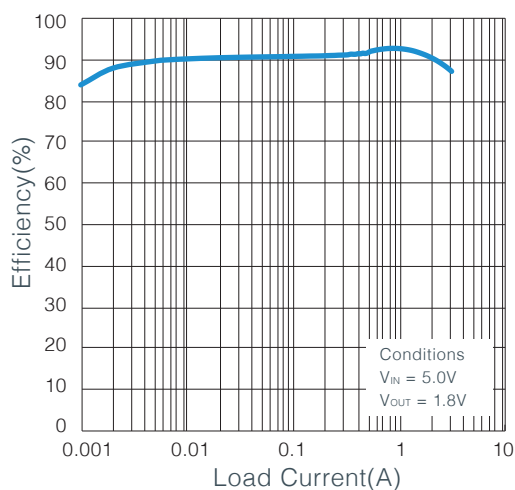

Ultra-Small-size Package



VQFN016V3030
3.0mm×3.0mm=9.0mm²


→ -55%



3A output
Large amount of
current per unit area
VMMP08LZ2020
2.0mm×2.0mm=4.0mm²


Low Ringing+Low EMI

Reducing the trace area of the loop with large switching change decreases the parasitic inductance along with unwanted

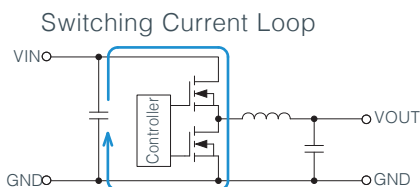


Switching Waveforms


Conventional Product



BD9D322QWZ



EMI Waveforms

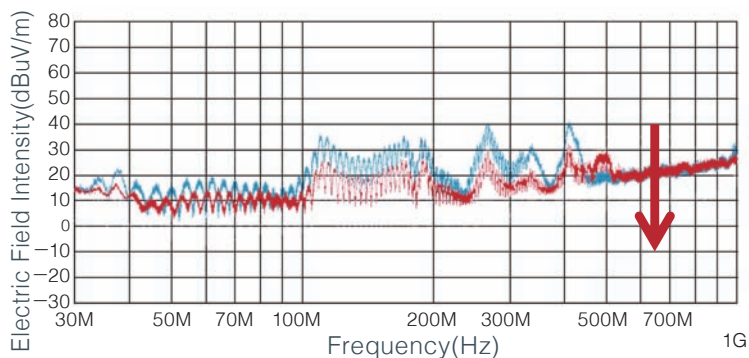


— Conventional Product
— BD9D322QWZ

Product Example

BD9D322QWZ

- Input voltage range : 4.5V to 18V
- Output voltage range : 0.765V to 7.0V
- Reference voltage : $0.765V \pm 1.6\%$
- Output current : 3A
- Switching frequency : 700kHz
- Built-In switching FET : 80mΩ, 50mΩ
- Quiescent current : 0.7mA
- Fast transient response characteristics via fixed ON time control
- High efficiency Light Load Mode
- Variable Soft Start
- Multiple protection functions
Over Current Protection(OCP),
Thermal Shutdown(TSD), Under Voltage Lock Out(UVLO)

BD9D322QWZ Application Circuit Diagram

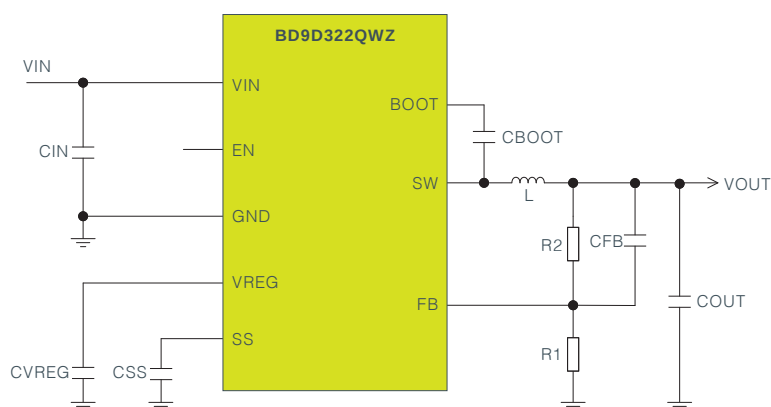

Ultra-Small-size Package



→ -86% →




3A output
Large amount of
current per unit area

HTSOP-J8
6.0mm×4.9mm=29.4mm²

UMMP008Z2020
2.0mm×2.0mm=4.0mm²

Space-Saving




→ -47% →



17mm×20mm=340mm²

12mm×15mm=180mm²

Efficiency vs Load Current

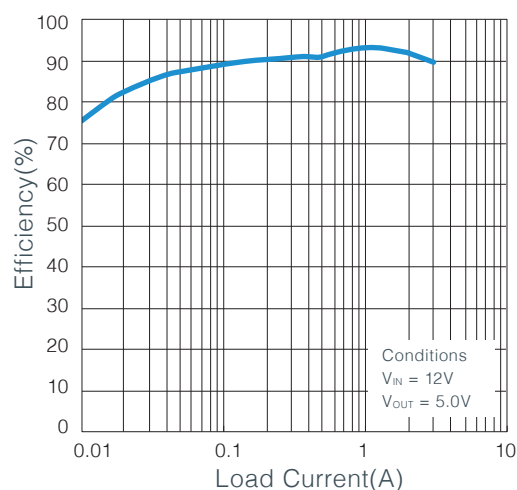

BD9Axxx/BD9Bxxx/BD9Dxxx series Function Table

Input Power Rail Voltage	Part No.	Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions							Operating Temperature (°C)	Package (W×D×H:mm)
								Power Good	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Overvoltage Protection		
5V	BD9A302QWZ	7	3	2.7 to 5.5	0.8 to (V _{IN} ×0.7)	1	Current	—	—	✓	✓	Recovery	Recovery	—	-40 to +85	UMMP008AZ020 (2.0×2.0×0.4)
	BD9B304QWZ	7	3	2.7 to 5.5	0.8 to (V _{IN} ×0.8)	1 or 2	ON Time	—	—	✓	✓	Recovery	Recovery	—	-40 to +85	UMMP008AZ020 (2.0×2.0×0.4)
	BD9B305QUZ	7	3	2.7 to 5.5	0.6 to (V _{IN} ×0.8)	1	ON Time	✓	✓	✓	✓	Recovery	Recovery	Recovery	-40 to +85	VMMP08LZ2020 (2.0×2.0×0.4)
12V	BD9D322QWZ	20	3	4.5 to 18	0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON Time	—	✓	✓	✓	Recovery	Recovery	—	-40 to +85	UMMP008Z2020 (2.0×2.0×0.4)
	BD9D323QWZ	20	3	4.5 to 18	0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON Time	—	✓	✓	—	Recovery	Recovery	—	-40 to +85	UMMP008Z2020 (2.0×2.0×0.4)

Small-size High Output Current Switching Regulator


The BD9F800MUX is a synchronous rectification buck DC/DC converter that integrates a low ON resistance power MOSFET. A maximum output current of 8A is possible in a small-size 3.5mm square package. In addition, fixed ON time control achieves high-speed load response characteristics and eliminates the need for an external phase compensation circuit.

Product Example



BD9F800MUX

- Input voltage : 4.5V to 28V
- Output voltage : 0.765V to 13.5V
- Reference voltage : $0.765V \pm 1.05\%$
- Output current : 8A
- Switching frequency : 300kHz/600kHz
- Built-In switching FET : 23m Ω , 11m Ω
- Fast transient response characteristics via fixed ON time control
- Multiple protection functions
Over Current Protection(OC),
Short-Circuit Protection(SCP),
Thermal Shutdown(TSD), Under Voltage Lock Out(UVLO)

BD9F800MUX Application Circuit Diagram

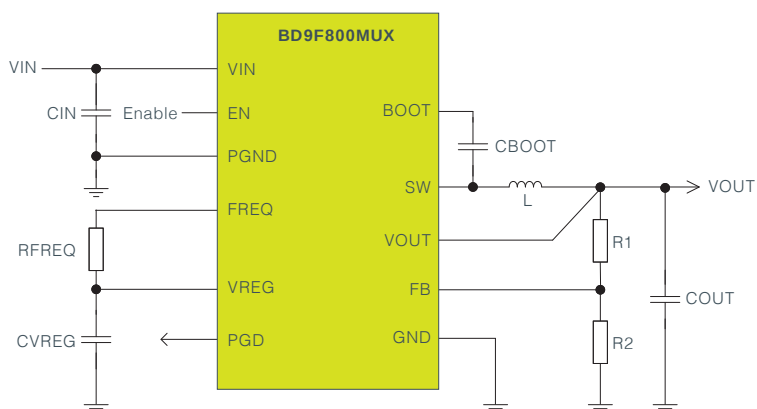


Ultra-Small-size Package




VQFN11X3535A
3.5mm(Typ)×3.5mm(Typ)×0.6mm(Max)

PCB
30mm×20mm=600mm²

BD9F800MUX Efficiency vs Output Current

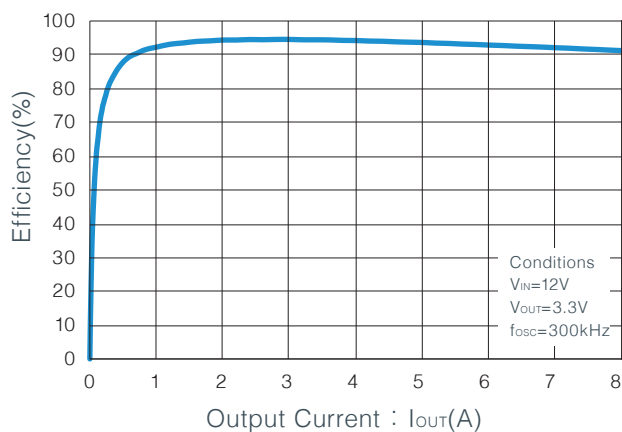

Transient Response Characteristics

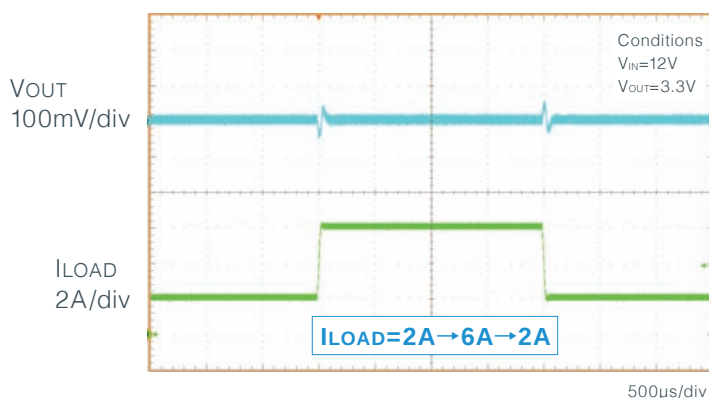


Wide Input Voltage Range Buck Switching Regulators

The BD9G201EFJ-LB and BD9G401EFJ-M are asynchronous rectification switching regulators with built-in high side MOSFET that can operate over a wide input voltage range from 4.5V to 42V. Current mode control enables high-speed load response and easy phase compensation. When used as a compact secondary power supply, step-down voltages such as 3.3V and 5V can be output from 12V/24V power supplies. In addition, synchronization with an external clock makes it possible to carry out noise management.

Product Example

BD9G201EFJ-LB/BD9G401EFJ-M

- Input voltage range : 4.5V to 42V
- Output voltage range : 0.8V to V_{CC}
- Reference voltage : $0.8V \pm 1.5\%$
- Output current : 1.5A(BD9G201)
: 3.5A(BD9G401)
- Switching frequency : 300kHz
- Built-in high side MOSFET : 140m Ω
- External clock synchronization function : 250kHz to 500kHz
- UVLO voltage setting via external resistance
- LLDO operation : 95% Max duty
- Multiple protection functions
Over Current Protection(OCP), Thermal Shutdown(TSD)




Exposed pad ensures excellent heat dissipation characteristics


HTSOP-J8ES

4.90mm(Typ)×6.00mm(Typ)×1.00mm(Max)

BD9G401EFJ-M Application Circuit Diagram

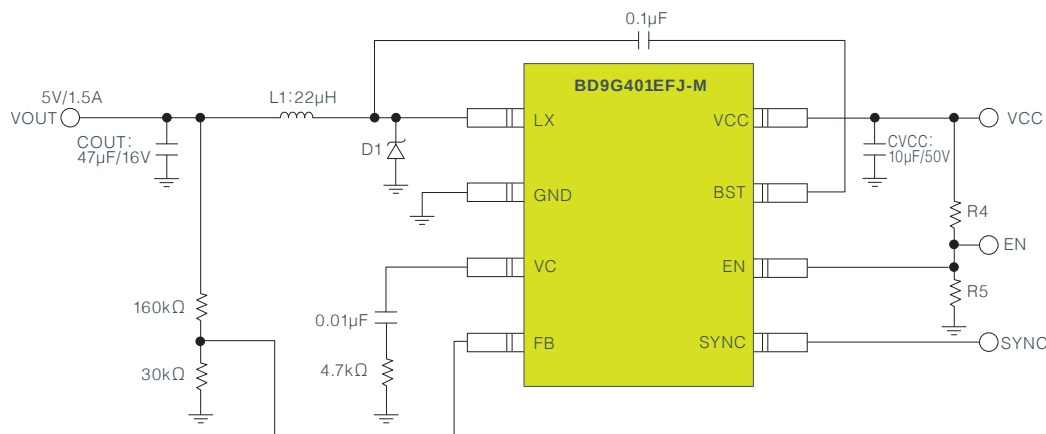

BD9G401EFJ-M Efficiency vs Output Current

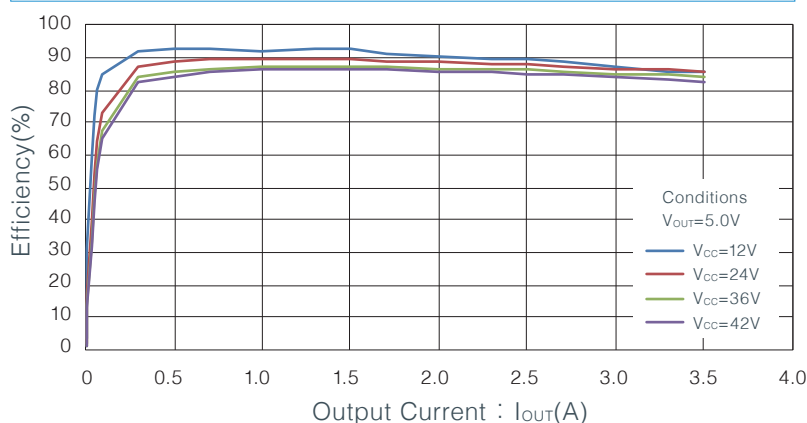

Low Current Low Input Voltage Switching Regulator


The BU33UV7NUX is a boost DC/DC converter capable of generating 3.3V from a 1- or 2-battery power supply. The starting voltage is low at just 0.9V, and once started it can output 3.3V until the battery voltage drops to as low as 0.6V. In addition, a low circuit current of 13 μ A contributes to longer battery life.

Product Example

BU33UV7NUX

- Input voltage range : 0.6V to 4.5V
- Output voltage : 3.3V(+1.3%/−1.15%)
- Starting voltage : 0.9V
- Output current : 500mA($V_{IN}>1.8V$, high power modes)
: 50mA($V_{IN}>1.8V$, low power modes)
- Circuit current : 13 μ A(High Power modes)
: 7 μ A(Low Power modes)
- Power down current : 2.7 μ A
- Switching frequency : 800kHz
- Includes a function that performs blocking between the input/output during UVLO and Enable OFF
- Automatically switches between PFM/PWM operation based on load current during high power mode
- Fixed PFM operation in low power mode reduces circuit current
- Pass-through operation when $V_{IN}>V_{OUT}$
- Output discharge function
- Built-in voltage detector circuit prevents battery leakage (1.5V detection voltage intended for 2 batteries)
- Multiple protection circuits
Under Voltage Lock Out(UVLO),
Over Voltage Protection(OVP), Over Current Protection(OCP),
Short-Circuit Protection(SCP), Thermal Shutdown(TSD)

Small-size Package




VSON10X3020
3.0mm(Typ)×2.0mm(Typ)×0.6mm(Max)




PCB
15mm×18mm

BU33UV7NUX Application Circuit Diagram

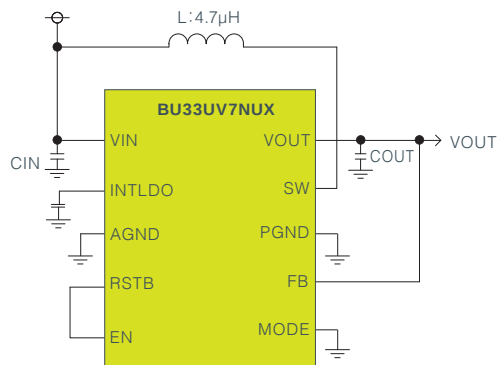

Efficiency vs Load Current

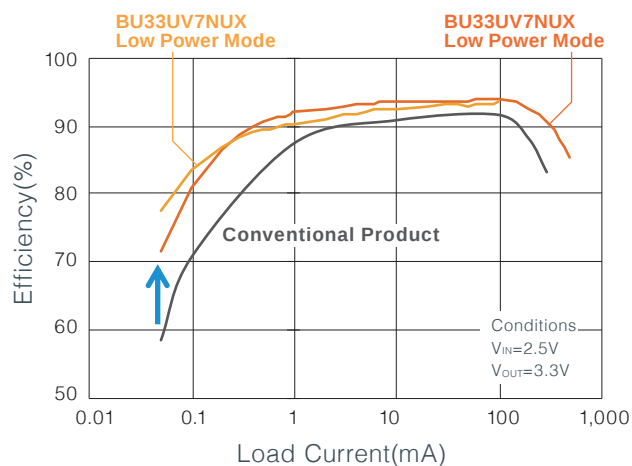

Battery Life Comparison

Conditions :
2Ah battery capacity
 $V_{IN}=1.2V$
 $V_{OUT}=3.3V$
 $I_{OUT}=50\mu A$

IC	Battery Life(Days)
BU33UV7NUX Low Power Mode	712
BU33UV7NUX High Power Mode	657
Conventional Product	537

+175

+120

Wide Input Voltage Range Boost Switching Regulator


The BD9615MUV-LB is a low-side Nch FET controller that supports high withstand voltages (60V) for switching regulators, making it suitable for applications requiring low-side FETs such as boost flybacks.

Product Example


BD9615MUV-LB

- Input voltage range : 3.5V to 60V
- Reference voltage : $0.8V \pm 1.5V$
- Switching frequency : 100kHz to 2.5MHz
- Guaranteed long-term supply for industrial equipment
- External clock synchronization
- Adjustable soft start
- ON/OFF control via EN pin
- Overvoltage protection circuit(via independent pin)
- Power Good output
- UVLO adjustment function(via external resistance)
- Max. duty switching function(50%/90%)

BD9615MUV-LB Application Circuit Diagram

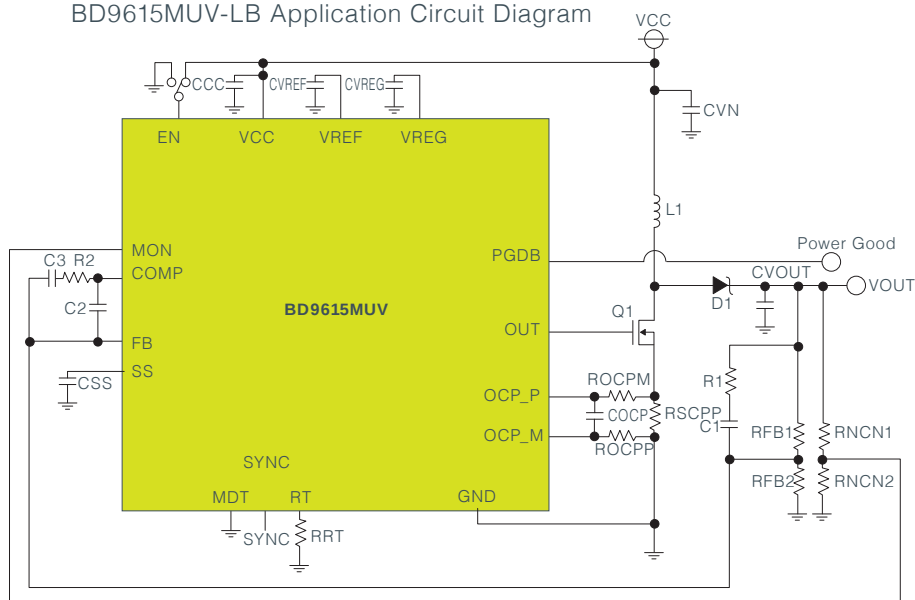

Efficiency vs Load Current

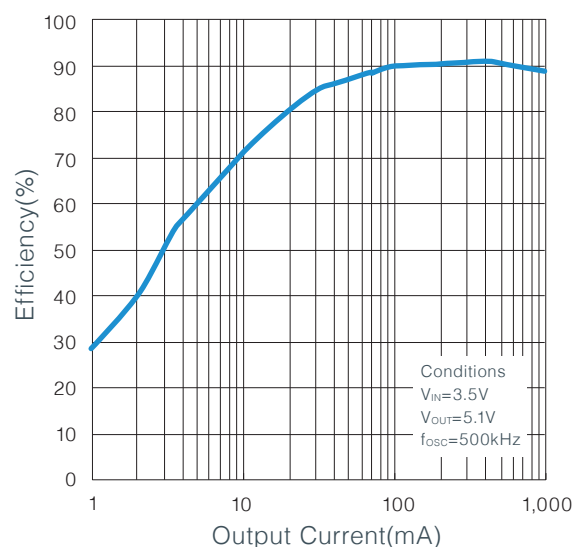


Small-size Package



VQFN16KV3030
 3.0mm(Typ)×3.0mm(Typ)×1.0mm(Max)

BD9x Family Lineup

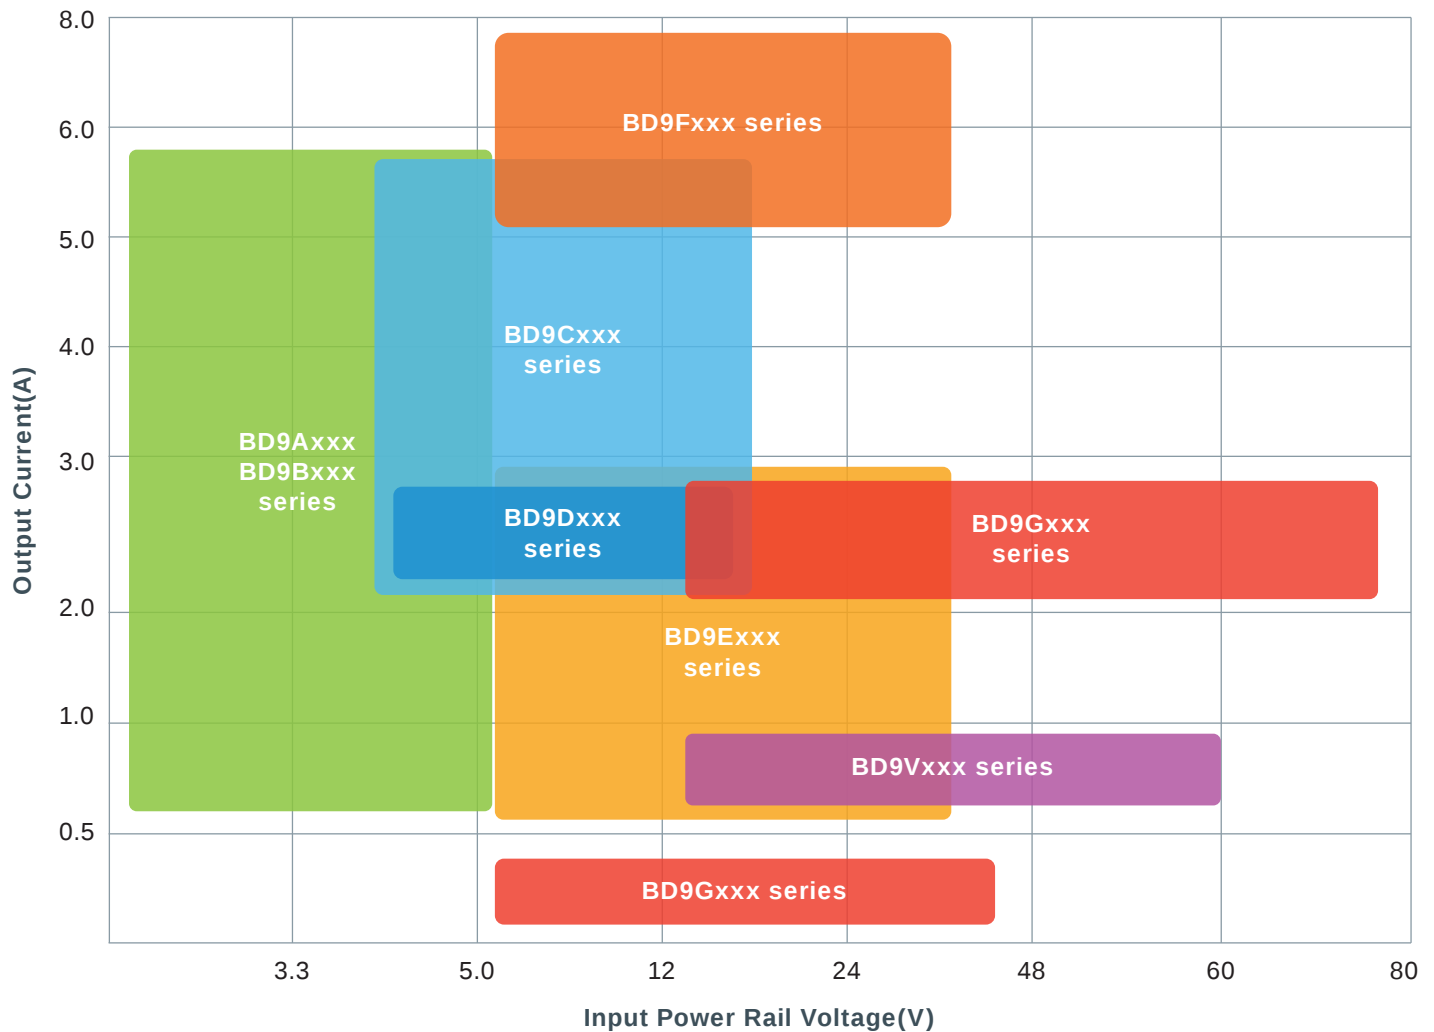

ROHM single output buck DC/DC converters allow designers to select the ideal power supply solution to meet specification requirements through a matrix of input voltage and output current. For the BD9x family, the '9' after the 'BD' in the part number indicates step-down, while the subsequent letter and number denote the maximum rated input voltage and output current, respectively.

Part Number Explanation

B **D** **9** **A** **3** **0** **0**

Topology

9 : Buck
8 : Boost, Boost-Buck, Inverting

Serial No.

00/01/02/...

Max. Rated Input Voltage and Control Method

A : $\leq 7V$ Current Mode
B : $\leq 7V$ ON Time
C : $\leq 20V$ Current Mode
D : $\leq 20V$ ON Time
E : $\leq 40V$ Current Mode
F : $\leq 40V$ ON Time
G, V : $\leq 80V$ Current Mode

Output Current

1 : $\leq 1A$
2 : $\leq 2A$
3 : $\leq 3A$
4 : $\leq 4A$
...
A : $\leq 10A$
...
Z : Controller

Note : Some products may not comply with the above guidelines


Primary Applications

DC48V 	Industrial Equipment Communication Infrastructure, PoE, Telephone Equipment Entertainment BD9Gxxx series P.19 BD9Vxxx series P.19
DC24V 	Industrial Equipment Office Equipment, Printers Consumer Devices, Home Appliances BD9Gxxx series P.19 BD9Fxxx series P.17 BD9Exxx series P.17
DC12V 	TVs, Recorders, Tuners Projectors, AV Equipment PCs, Home Gateways, Routers Office Equipment, Printers FPGA Reference Boards, Motherboards Residential Equipment, Automotive Accessories BD9Fxxx series P.17 BD9Exxx series P.17 BD9Dxxx series P.15 BD9Cxxx series P.15
DC7.4V (2cell) 	Digital Cameras, Video Recorders Portables Mobile Phones Chargers BD9Dxxx series P.15 BD9Cxxx series P.15
DC5V 	PC Peripherals Storage Equipment Secondary/POL Power Supplies BD9Bxxx series P.13 BD9Axxx series P.13


3.3V/5V Input

The BD9Axxx and BD9Bxxx series are designed to generate a low voltage such as 1.8V from 3.3V or 5V power supplies. Pin-compatible models with output currents ranging from 1A to 6A are offered, making it possible to select the optimal IC based on application requirements. When the load current is large operation is carried out at high speed under PWM mode, then automatically switches to light load mode (PFM mode) at smaller load currents. The BD9Bxxx series is the higher performance version of the BD9Axxx series, and replacement is possible with only minor board modifications needed. Changing ICs can be made easier by designing the PCB layout to support both types from the initial stage.


BD9Axxx/BD9Bxxx series

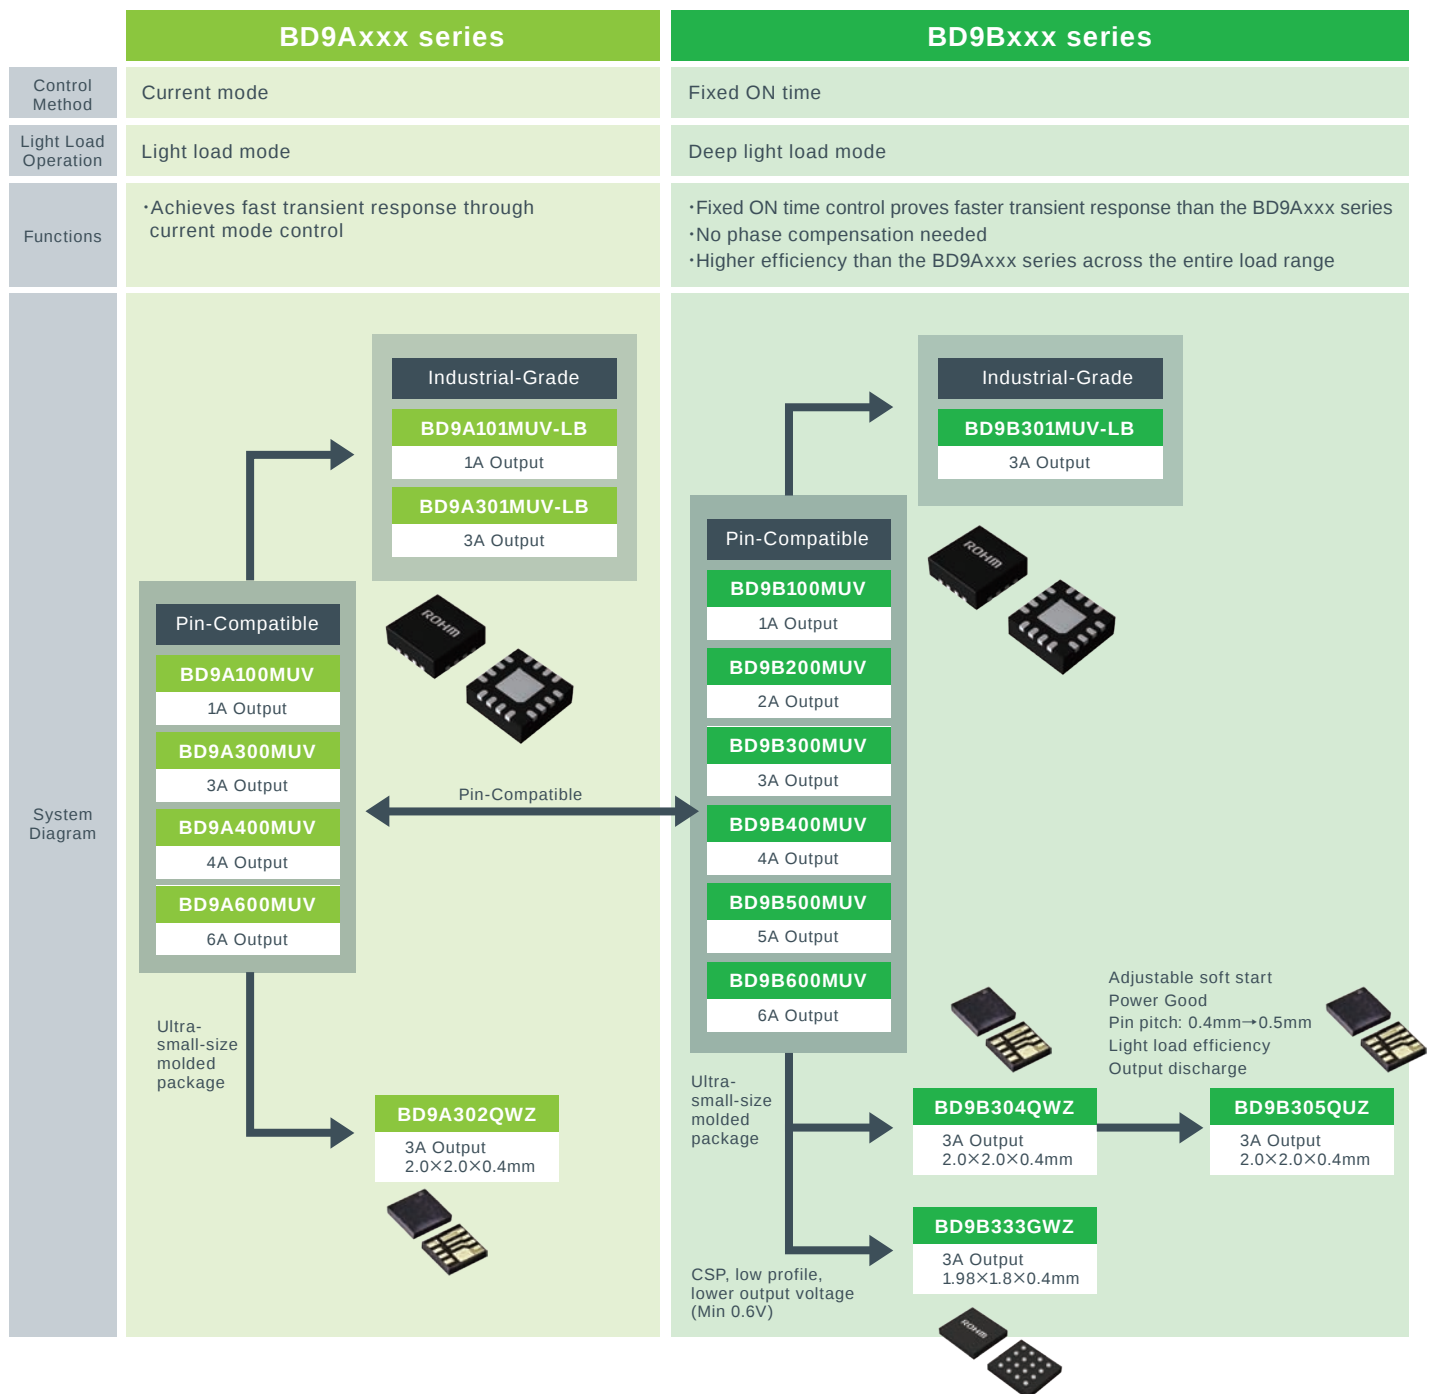


BD9B305QUZ Application Circuit Diagram

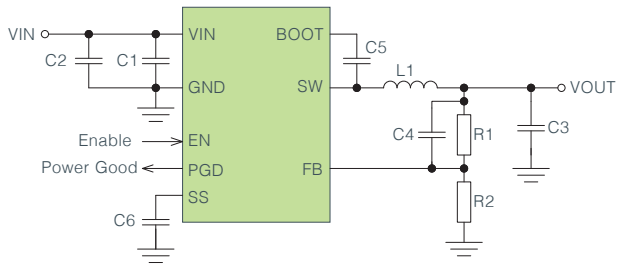

BD9B305QUZ Efficiency vs Load Current

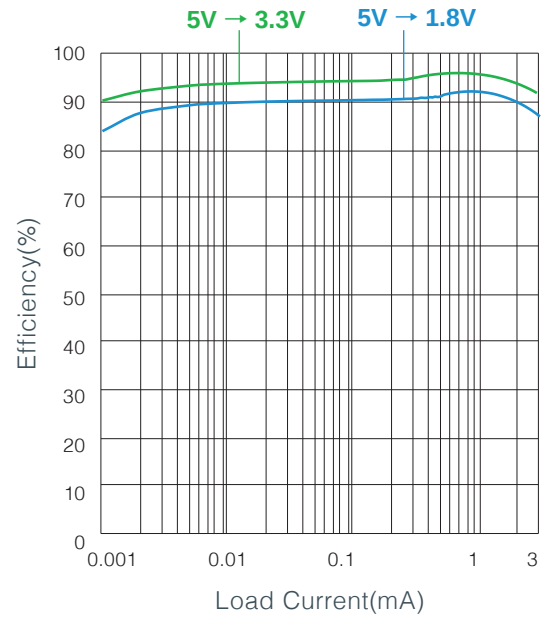

BD9B305QUZ PCB Layout

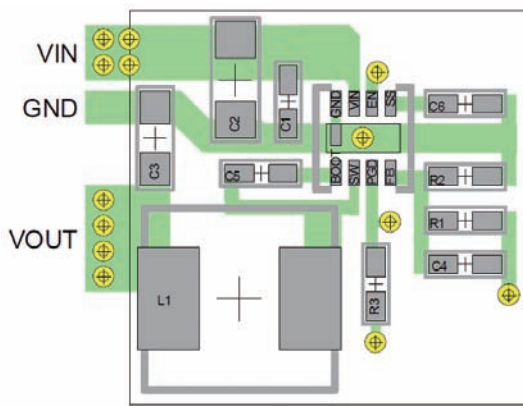

BD9Axxx/BD9Bxxx series Specifications

Part No.	Grade		Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions							Operating Temperature (°C)	Package (mm)
	Consumer	Industrial							Power Good	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Overvoltage Protection		
BD9A100MUV	✓	—	7	1	2.7 to 5.5	0.8 to (V _{IN} ×0.7)	1	Current	✓	✓	✓	✓	Recovery	Recovery	—	−40 to +85	VQFN016V3030
BD9A101MUV-LB	—	✓		1												−40 to +125	VQFN016V3030
BD9A300MUV	✓	—		3												−40 to +85	VQFN016V3030
BD9A301MUV-LB	—	✓		3												−40 to +125	VQFN016V3030
BD9A400MUV	✓	—		4												−40 to +85	VQFN016V3030
BD9A600MUV	✓	—		6												−40 to +85	VQFN016V3030
BD9B100MUV	✓	—		1	2.7 to 5.5	0.8 to (V _{IN} ×0.8)	1 or 2	ON time	✓	✓	✓	✓	Recovery	Recovery	—	−40 to +85	VQFN016V3030
BD9B200MUV	✓	—		2												−40 to +85	VQFN016V3030
BD9B300MUV	✓	—		3												−40 to +85	VQFN016V3030
BD9B301MUV-LB	—	✓		3												−40 to +125	VQFN016V3030
BD9B400MUV	✓	—		4												−40 to +85	VQFN016V3030
BD9B500MUV	✓	—		5												−40 to +85	VQFN016V3030
BD9B600MUV	✓	—		6												−40 to +85	VQFN016V3030
BD9A302QWZ	✓	—		3		0.8 to (V _{IN} ×0.7)	1	Current	—	—	✓	✓	Recovery	Recovery	—	−40 to +85	UMMP008AZ020 (2.0×2.0×0.4)
BD9B304QWZ	✓	—				0.8 to (V _{IN} ×0.8)	1 or 2	ON time	—	—							VMMP08LZ2020 (2.0×2.0×0.4)
BD9B305QUZ	✓	—				0.6 to (V _{IN} ×0.8)	1	ON time	✓	✓					Recovery		
BD9B333GWZ	✓	—		3		0.6 to (V _{IN} ×0.8)	1.3	ON time	✓	✓	✓	✓	Recovery	Recovery	—	−40 to +85	UCSP35L1 (1.98×1.8×0.4)


12V Input

The BD9Cxxx and BD9Dxxx series are designed to generate voltages such as 3.3V or 5V from 12V power supplies. The BD9Cxxx series consists of simple current mode buck converters. Pin-compatible models with output currents ranging from 3A to 6A are offered, making it possible to quickly replace the power supply even when the load current specifications change. The BD9Dxx series of fixed ON time mode buck converters provides faster transient response than the BD9Cxxx series. In addition, two types of power supplies, one featuring fixed PWM mode and the other integrating an automatic light load switching mode, can be selected based on system specifications.


BD9Cxxx/BD9Dxxx series

	BD9Cxxx series	BD9Dxxx series
Control Method	Current Mode	Fixed ON time
Light Load Operation	—	With and without
Functions	•Achieves fast transient response through current mode control	•Fixed ON time control provides faster transient response than current mode control •No phase compensation needed •Light load operation ensures high efficiency across the entire load range
System Diagram		

BD9C301FJ Application Circuit Diagram

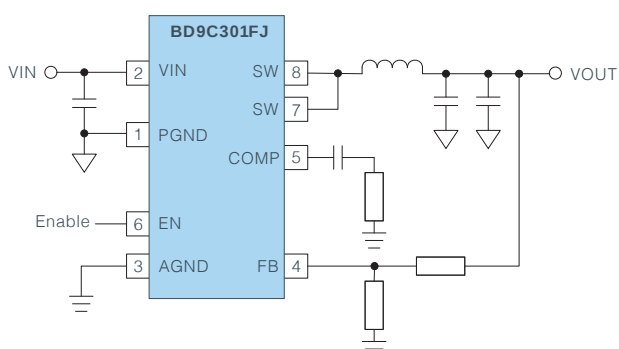


BD9D300MUV Application Circuit Diagram

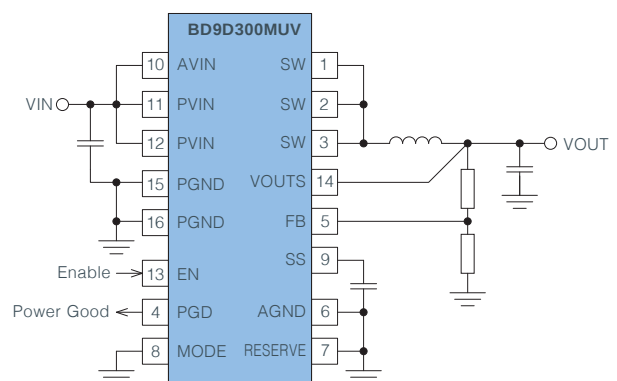



BD9C301FJ PCB
27mm×9mm=243mm²




BD9D321EFJ PCB
17mm×20mm=340mm²




BD9D322QWZ PCB
12mm×15mm=180mm²

Efficiency vs Load Current

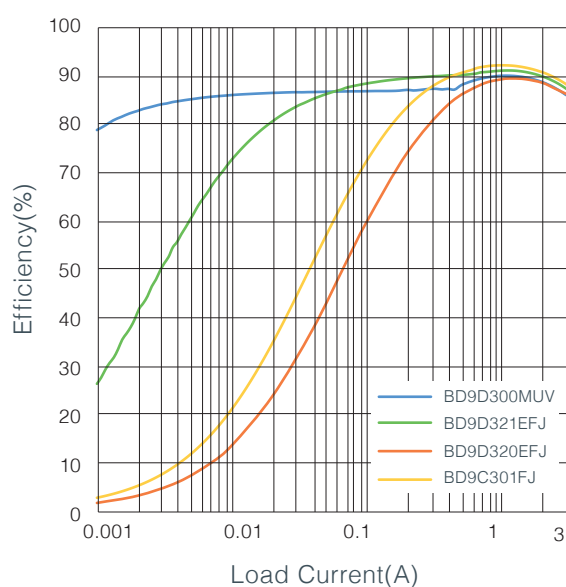

BD9D300MUV Transient Response Characteristics

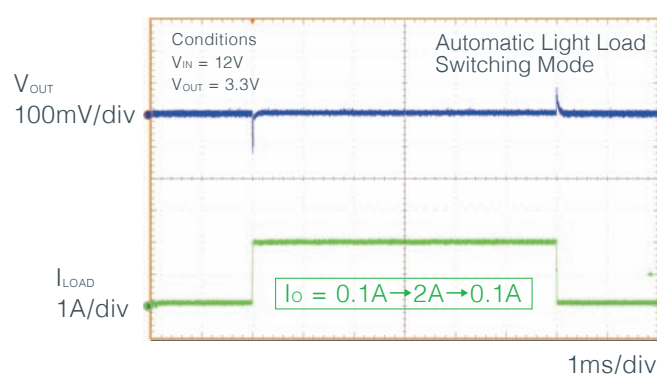

BD9Cxxx/BD9Dxxx series Specifications

Part No.	Grade		Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions							Operating Temperature (°C)	Package (mm)
	Consumer	Industrial							Power Good	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Overvoltage Protection		
BD9C301FJ	✓	—	20	3	4.5 to 18	(V _{IN} ×0.125) to (V _{IN} ×0.7) (V _{IN} ×0.125)≥ 0.8	0.5	Current	—	—	✓	—	Latch	Recovery	—	−40 to +85	SOP-J8
BD9C301FJ-LB	—	✓		3					—	—	—	—	—	—	−40 to +125	SOP-J8	
BD9C401EFJ	✓	—		4					—	—	—	—	—	−40 to +85	HTSOP-J8		
BD9C501EFJ	✓	—		5	(V _{IN} ×0.075) to (V _{IN} ×0.7) (V _{IN} ×0.075)≥ 0.8	0.7	ON time	—	✓	✓	—	Recovery	Recovery	—	−40 to +85	HTSOP-J8	
BD9C601EFJ	✓	—		6				—	—	—	—	—	−40 to +85	HTSOP-J8			
BD9D300MUV	✓	—		3				4.0 to 17	0.9 to 5.25 (V _{IN} ×0.125) to V _{IN}	1.25	ON time	✓	✓	✓	✓	Recovery	Recovery
BD9D320EFJ	✓	—		3	4.5 to 18	0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON time	—	✓	✓	—	Recovery	Recovery	—	−40 to +85	HTSOP-J8
BD9D321EFJ	✓	—		3					—	—	—	✓	Recovery	Recovery	—	−40 to +85	HTSOP-J8
BD9D322QWZ	✓	—		3					0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON time	—	✓	✓	✓	Recovery	Recovery
BD9D323QWZ	✓	—		3												UMMP008Z2020	


24V Input

The BD9Exxx and BD9Fxxx series are designed to generate voltages such as 3.3V or 5V from 12V or 24V power supplies. The BD9Exxx series consists of simple current mode buck converters. Users can select between 3 different switching frequencies and models with/without light load mode based on application requirements.


The BD9Fxxx series of fixed ON time mode buck converters provides fast transient response.

BD9Exxx/BD9Fxxx series

	BD9Exxx series	BD9Fxxx series
Control Method	Current Mode	Fixed ON time
Light Load Operation	With and without	—
Functions	- Current mode control provides fast transient response - Light load operation ensures high efficiency across the entire load range	- Fixed ON time control provides faster transient response than current mode control - No phase compensation needed
System Diagram	The diagram illustrates the BD9Exxx series components and their features: Industrial-Grade and Pin-Compatible are common to all models. 1MHz group: - BD9E100FJ-LB: 1A Output - BD9E300EFJ-LB: 2.5A Output 570kHz group: - BD9E101FJ-LB: 1A Output - BD9E301EFJ-LB: 2.5A Output 300kHz group: - BD9E303EFJ-LB: 3A Output Light Load Mode group (Pin-Compatible): - BD9E104FJ: 1A, 570kHz - BD9E302EFJ: 3A, 550kHz BD9E151NUX (small-size package): 1.2A, 600kHz 2.0mm×3.0mm×0.6mm - Adjustable Soft Start	The diagram illustrates the BD9Fxxx series components and their features: BD9F800MUX: 8A Output 300kHz/600kHz - Power Good BD9F500QUZ: 5A Output 600kHz/1M/2.2MHz - Power Good - Light Load Mode



BD9E300EFJ-LB PCB
30mm×15mm=450mm²




BD9F800MUX PCB
30mm×20mm=600mm²

Selectable based on system requirements


Although the BD9E300EFJ-LB and BD9E303EFJ-LB are buck DC/DC converters compatible with the same 24V power rail input, they were developed using very different concepts. The BD9E300EFJ-LB features high 1MHz switching frequency that saves valuable board space by supporting the use of smaller inductors. In contrast, the BD9E303EFJ-LB integrates a low ON resistance FET and operates at a low switching frequency of 300kHz, ensuring high efficiency and reduced heat generation with low switching loss.

Part No.	Features	Switching Frequency	Inductance	FET ON Resistance	Efficiency	Output Current (A)	Max. Duty Ratio	Min. Duty Ratio	Package Size
BD9E300EFJ-LB	Compact space-saving package	1MHz	4.7μH	170mΩ/140mΩ	See below	2.5A	70%	15%	27mm×10mm 270mm ²
BD9E303EFJ-LB	Low heat generation	300kHz	10μH	90mΩ/80mΩ	See below	3.0A	80%	6%	33mm×15mm 495mm ²

BD9E300EFJ-LB Application Circuit Diagram

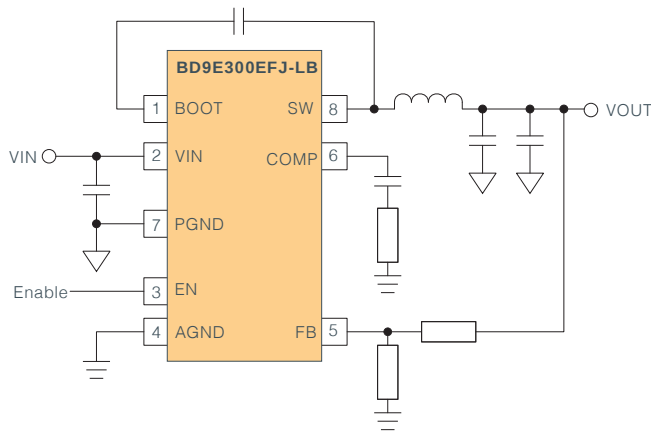

Efficiency vs Load Current

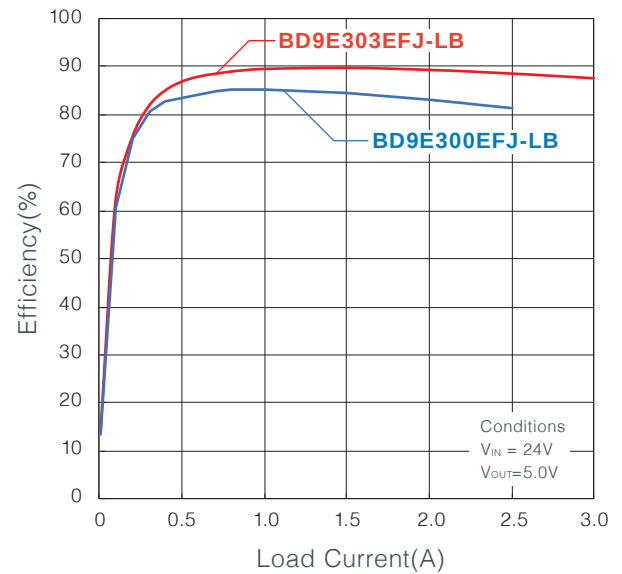

BD9Exxx/BD9Fxxx series Specifications


Part No.	Grade		Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions							Operating Temperature (°C)	Package (mm)
	Consumer	Industrial							Power Good	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Overvoltage Protection		
BD9E100FJ-LB	—	✓	40	1	7.0 to 36	(VIN×0.15) to (VIN×0.7) (VIN×0.15)≥1.0	1	Current	—	—	✓	—	Recovery	Recovery	✓	-40 to +150	SOP-J8
BD9E101FJ-LB	—	✓		1		(VIN×0.0855) to (VIN×0.7) (VIN×0.0855)≥1.0	0.57		—	—	—	—	—	—	—		SOP-J8
BD9E300EFJ-LB	—	✓		2.5		(VIN×0.15) to (VIN×0.7) (VIN×0.15)≥1.0	1		—	—	—	—	—	—	—		HTSOP-J8
BD9E301EFJ-LB	—	✓		2.5		(VIN×0.0855) to (VIN×0.7) (VIN×0.0855)≥1.0	0.57		—	—	—	—	—	—	—		HTSOP-J8
BD9E303EFJ-LB	—	✓		3		(VIN×0.06) to (VIN×0.8) (VIN×0.06)≥1.0	0.3		—	—	—	—	—	—	—		HTSOP-J8
BD9F500QUZ	✓	—	39	5	4.5 to 36	0.6 to 14 *1	0.6/1/2.2	ON time	✓	✓	✓	✓	Recovery	Recovery	✓	-40 to +85	VMMP16LZ3030 (3.0×3.0×0.4)
BD9E104FJ	✓	—	30	1	7.0 to 26	(VIN×0.143) to (VIN×0.5) (VIN×0.143)≥1.0	0.57	Current	—	—	✓	✓	Recovery	Recovery	✓	-40 to +85	SOP-J8
BD9E302EFJ	✓	—		3	7.0 to 28	(VIN×0.143) to (VIN×0.7) (VIN×0.143)≥1.0	0.55		—	—	—	—	Recovery	Recovery	—	-40 to +85	HTSOP-J8
BD9E151NUX	✓	—	30	1.2	6.0 to 28	(VIN×0.06) to (VIN×0.7) *1 (VIN×0.06)≥1.0	0.6	Current	—	✓	—	—	Recovery	Recovery	✓	-40 to +85	VSON008X2030
BD9F800NUX	✓	—	30	8	4.5 to 28	0.765 to 13.5 *1	0.3/0.6	ON time	✓	—	✓	—	Recovery	Recovery	—	-40 to +85	VQFN11X3535A

*1 : Limitations will exist depending on the input/output voltage conditions.

Wide Input Voltage Range: 24V/48V/60V

The BD9Gxxx series of simple current mode buck converters is designed to generate intermediate voltages of 12V or 24V from 42V and 48V power supplies. The BD9G341AEFJ features a rated current of 80V (76V input) that ensures sufficient margin even for 48V bus lines used in communication infrastructure applications, making it easy to achieve safe power supply designs for high voltage sets including phones, routers, and base stations. The BD9Vxxx series utilizes ROHM's ultra-fast pulse control technology Nano Pulse Control® to deliver the industry's highest step-down ratio. This makes it possible to generate 2.5V from a 60V power supply using a single IC, contributing to set miniaturization and simpler system design.

BD9Gxxx/BD9Vxxx series

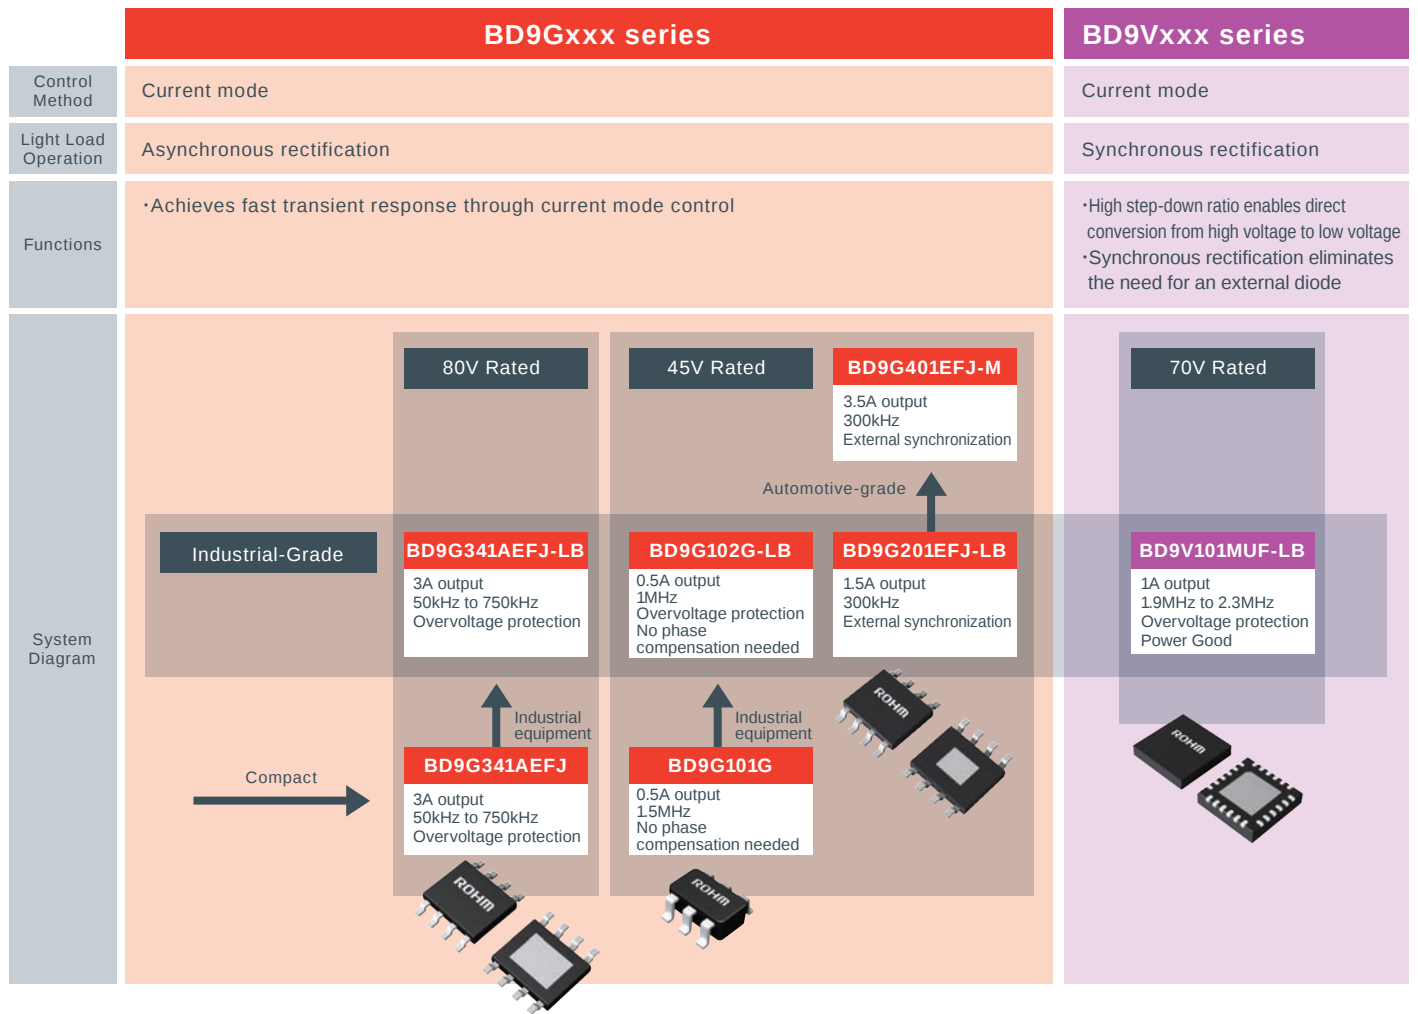


BD9Gxxx/BD9Vxxx series Specifications


Part No.	Grade			Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions								Operating Temperature (°C)	Package (mm)
	Consumer	Industrial	Automotive							Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Overvoltage Protection		
BD9G101G	✓	—	—	45	0.5	6.0 to 42	$(V_N \times 0.15) \text{ to } (V_N \times 0.7)$ $(V_N \times 0.15) \geq 1.0$	1.5	Current	—	—	—	—	—	Recovery	Recovery	—	−40 to +105	SSOP6
BD9G102G-LB	—	✓	—		—	—	$(V_N \times 0.08) \text{ to } (V_N \times 0.8)$ $(V_N \times 0.08) \geq 0.75$	1		—	—	—	—	—	Recovery	Recovery	✓	−40 to +85	SSOP6
BD9G201EFJ-LB	—	✓	—		1.5	4.5 to 42	0.8 to V_N *1	0.3	Current	—	✓	—	—	—	Recovery	Recovery	—	−40 to +105	HTSOP-J8ES
BD9G401EFJ-M	—	—	✓		3.5	—	—	—		—	—	—	—	—	Recovery	Recovery	—	—	HTSOP-J8ES
BD9V101MUF-LB	—	✓	—	70	1	16 to 60	0.8 to 5.5	1.9 to 2.3	Current	✓	—	—	✓	—	Recovery	Recovery	✓	−40 to +150	VQFN24FV4040
BD9G341AEFJ	✓	—	—	80	3	12 to 76	1.0 to V_N *1	0.05 to 0.75	Current	—	—	—	—	—	Recovery	Recovery	✓	−40 to +85	HTSOP-J8
BD9G341AEFJ-LB	—	✓	—																HTSOP-J8

*1 : Limitations will exist depending on the input/output voltage conditions.


BD9G341AEFJ Application Circuit Diagram

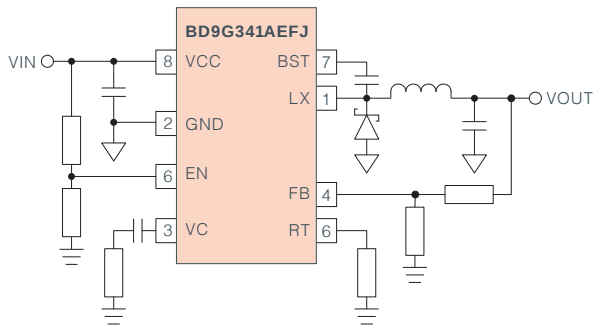


BD9G341AEFJ Efficiency vs Load Current

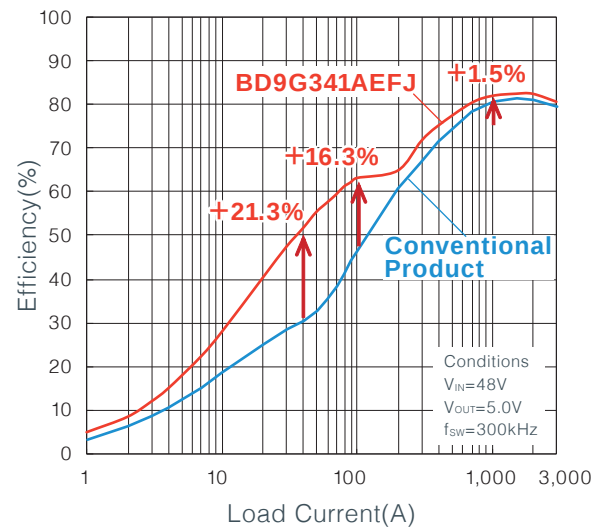

BD9G341AEFJ

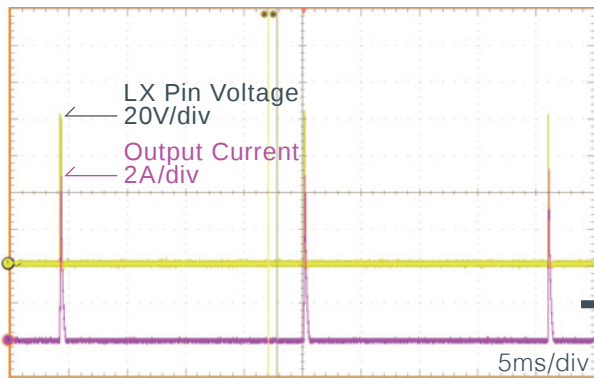


When the output is shorted, overcurrent protection in hiccup mode prevents breakdown by suppressing heat generation within the IC


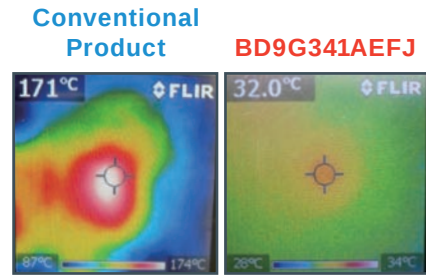


IC surface temperature when the output is shorted

BD9G101G Application Circuit Diagram

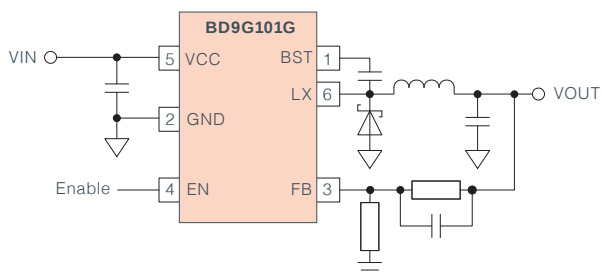

BD9V101MUF-LB Application Circuit Diagram

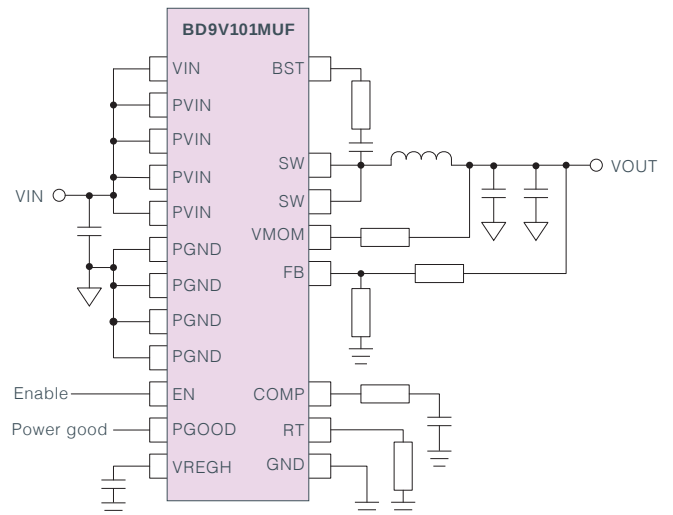

BD9V101MUF-LB PCB
18mm×20mm=360mm²

Buck Controller(with External Switch FET)

The BD9611MUV 56V (Max) input buck controller is a 60V rated

synchronous rectification buck DC/DC controller featuring a wide input voltage range that supports high voltages. Control circuitry is built in (based on PWM/voltage mode), along with 2 external 10V Nch FET drive circuits. Additional features include an adjustment function for the oscillation frequency and soft start time, overcurrent protection function, and external clock synchronization function that provide superior design flexibility. Furthermore, a low input malfunction prevention circuit (EXUVLO) with high accuracy reference voltage is connected to the CTL pin, which can be adjusted by the resistance ratio between V_{CC} and GND. Also, pre-bias is enabled that suppresses current draw from the output side during startup.

Product Example


BD9611MUV

- Input voltage range : 10V to 56V(Rated 60V)
- Output voltage range : 1.0V to ($V_{IN} \times 0.8$)V
- Reference voltage : $0.8V \pm 1.0\%$
- Built-in external Nch FET drive circuit
- Gate drive voltage : 9V to 11V
- Supports pre-bias
- Variable soft start prevents inrush current during power ON
- Adjustable operating frequency from 50kHz to 500kHz
- UVLO value settable using external parts
- External clock synchronization possible
- Synchronous operation of multiple output channels enabled using multiple ICs
- Multiple protection circuits : Over Current Protection (OCP), Thermal Shutdown (TSD), Under Voltage Lock Out (UVLO)




Exposed pad ensures excellent heat dissipation characteristics


BD9611MUV Application Circuit Diagram

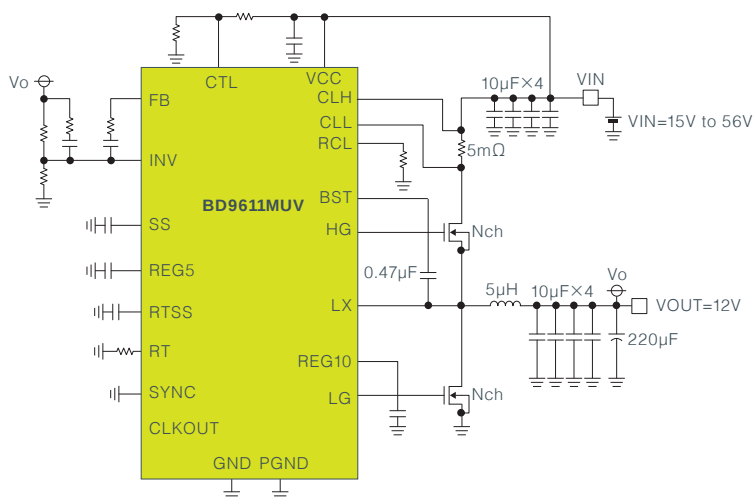

BD9611MUV Efficiency vs Load Current

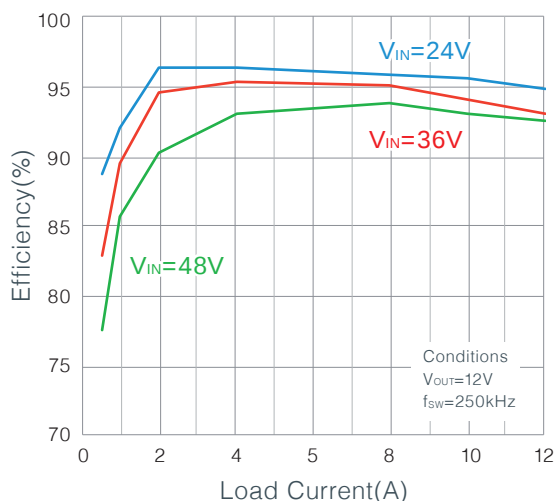


BD9611MUV Transient Response Characteristics

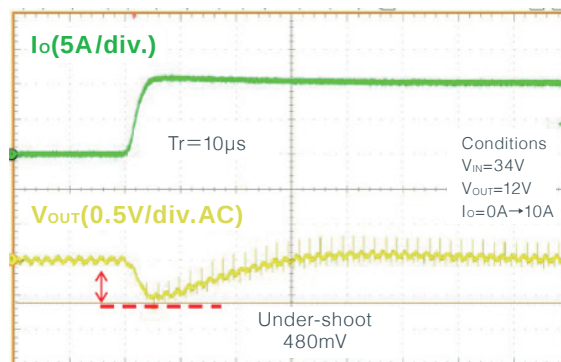


200W Power Supply Solution

- Input voltage : 40V
- Output voltage : 24V
- Output current : 0.01A to 8A
- Switching frequency : 100kHz


BD9611MUV 200W Output Application Circuit Diagram

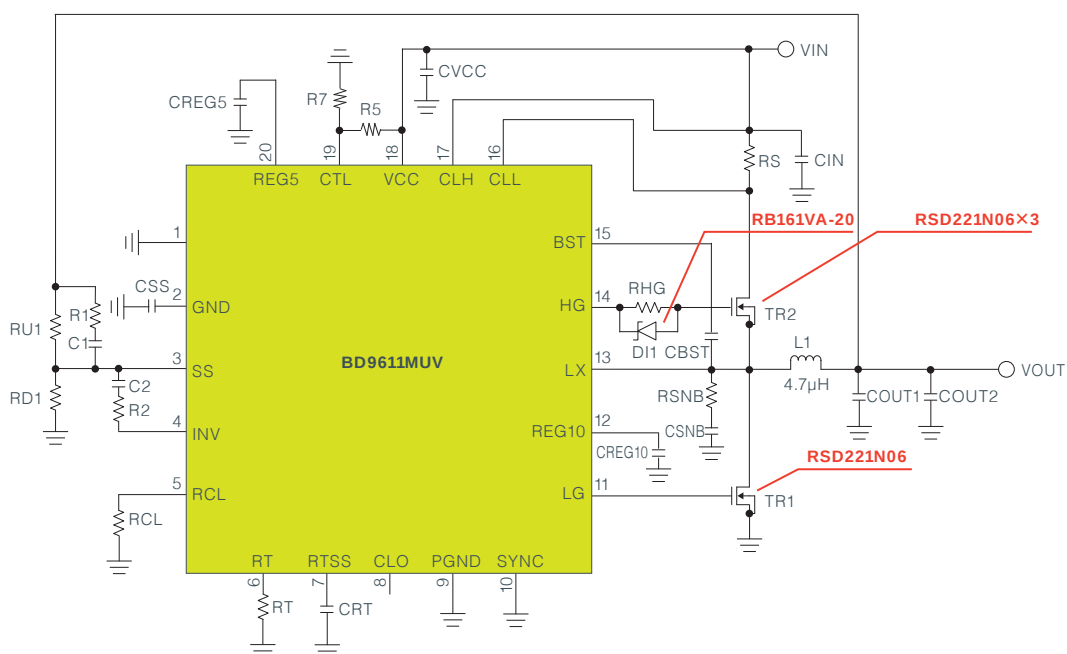

BD9611MUV Efficiency vs Load Current

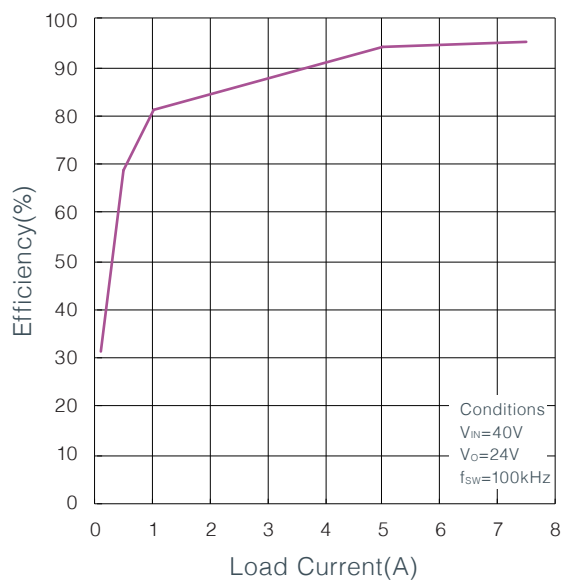

PCB Temperature Distribution

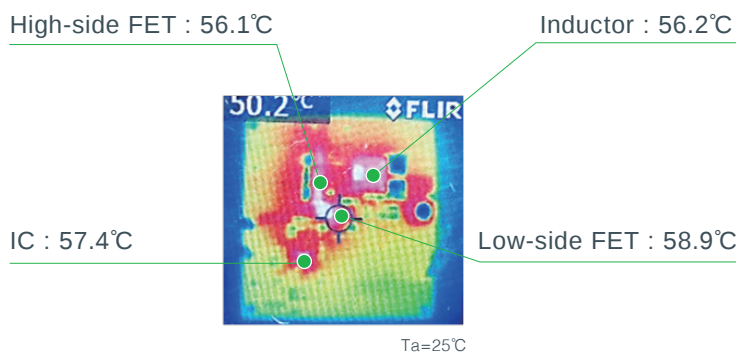

Flyback Converters

The BD7F100HFN-LB and BD7F100EFJ-LB are newly developed isolated flyback DC/DC converter ICs that stabilize the secondary output by controlling the flyback voltage of the primary side, eliminating the need for a return path from the output. As a result, optocouplers typically required to isolate the feedback circuit in general-purpose isolated converters are no longer needed, reducing costs and improving reliability by decreasing the number of limited life components. In terms of performance, high-speed load response is achieved by utilizing adaptive ON time control, while light load mode ensures high efficiency across the entire load range. In addition, cross-regulation is significantly improved, making them ideal for isolated power supplies in a variety of industrial equipment, such as for isolated gate drivers in inverters.

Product Example


BD7F100HFN-LB/BD7F100EFJ-LB

- Input voltage range : 3.0V to 40V(45V rating)
- Switch pin voltage : 50V(60V rating)
- Switch current limit : 1.25A
- Operating frequency : 400kHz
- Reference voltage : $\pm 1.5\%$
- High-speed load response achieved through adaptive ON time control
- Fixed frequency operation facilitates EMC countermeasures
- Automatic light load mode provides high efficiency across the entire load range
- Eliminates the need for parts that cross the isolation boundary, improving functional safety
- No limited life parts required ensures long-term operation
- Supports multi-output configuration with superior cross regulation
- Integrates a load compensation function for secondary Schottky barrier diodes
- Output voltage can be set by 2 external resistors and the transformer winding ratio
- Built-in soft start function
- Multiple protection circuits


Over Current Protection (OCP), Thermal Shutdown (TSD), Under Voltage Lock Out (UVLO)




BD7F100HFN-LB
HSON8
2.90mm×3.00mm×0.60mm




BD7F100EFJ-LB
HTSOP-J8
4.90mm×6.00mm×1.00mm

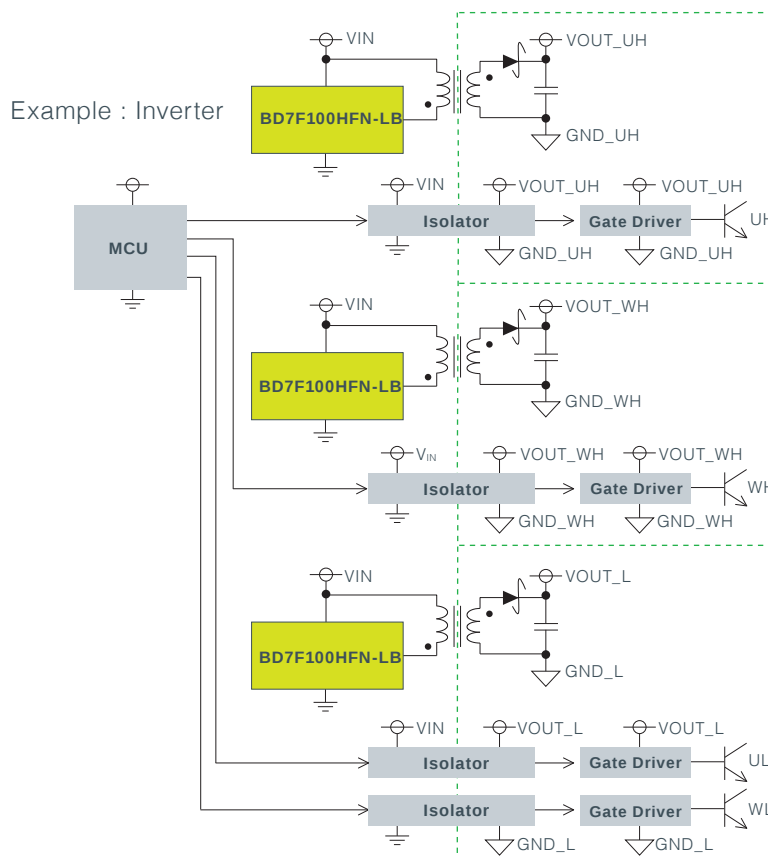


BD7F100HFN-LB Application Circuit Diagram 24V→5V

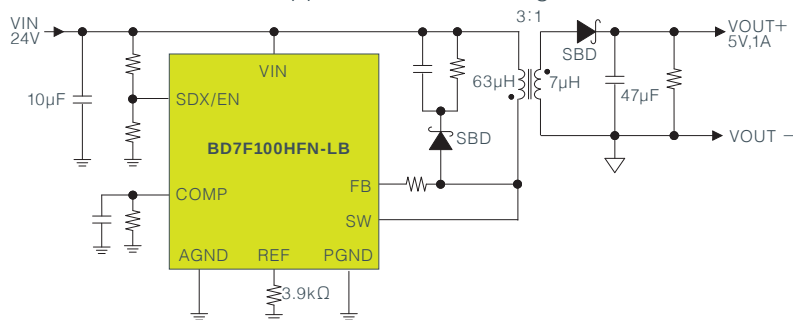


BD7F100HFN-LB Evaluation Board




BD7F100HFN-LB Application Circuit Diagram 24V→±15V

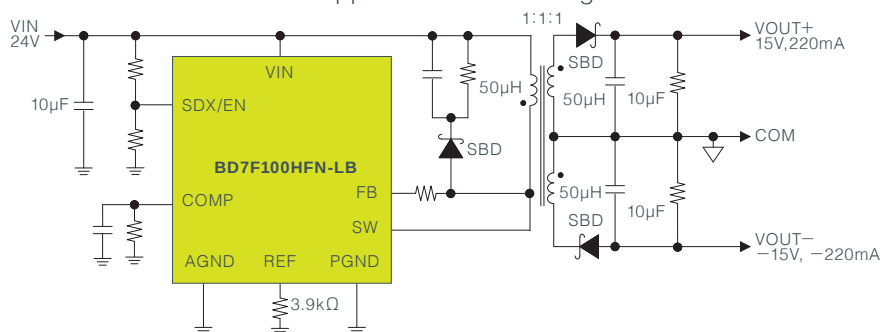


BD7F100HFN-LB Application Circuit Diagram 5V→5V

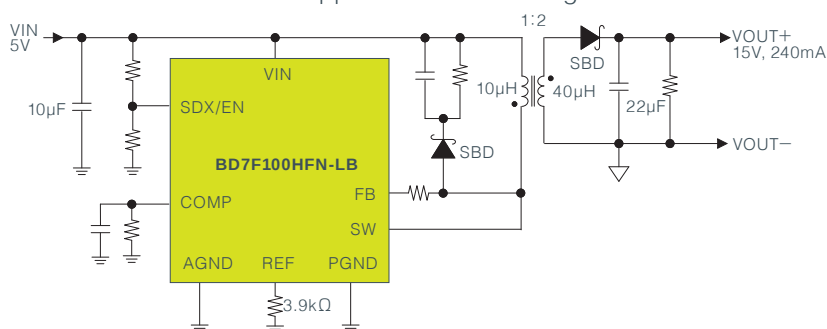

BD7F100HFN-LB
Max Output Power vs Input Supply Voltage

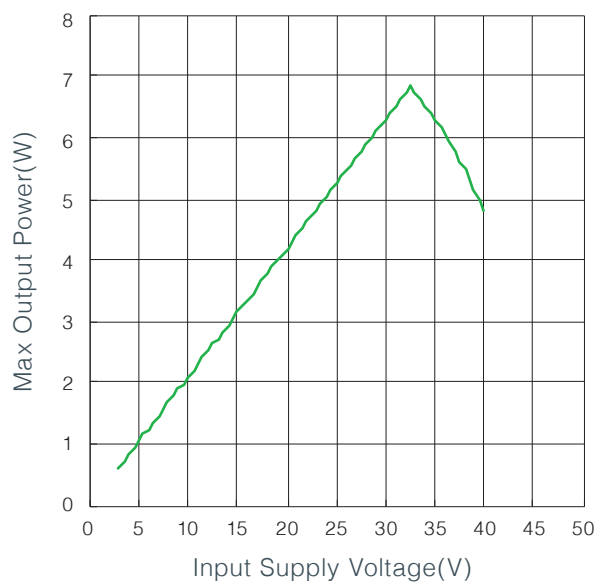


Effects of ROHM's Load Compensation Function

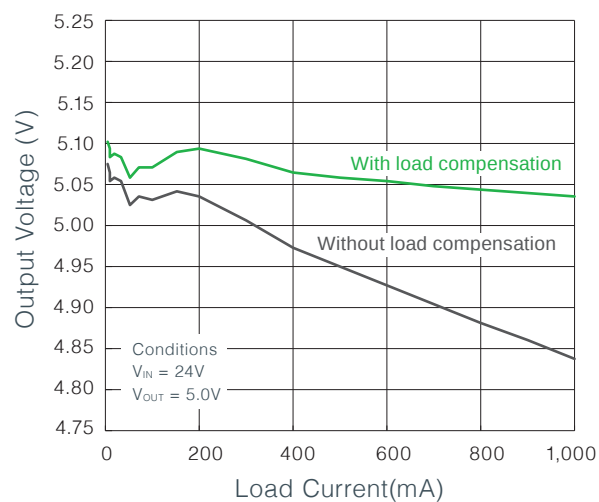

The load compensation function corrects output voltage drops due to the V_f characteristics of the secondary Schottky barrier diode depending on the load current

Single Output Buck Converter Selection Guide

≤1A Output

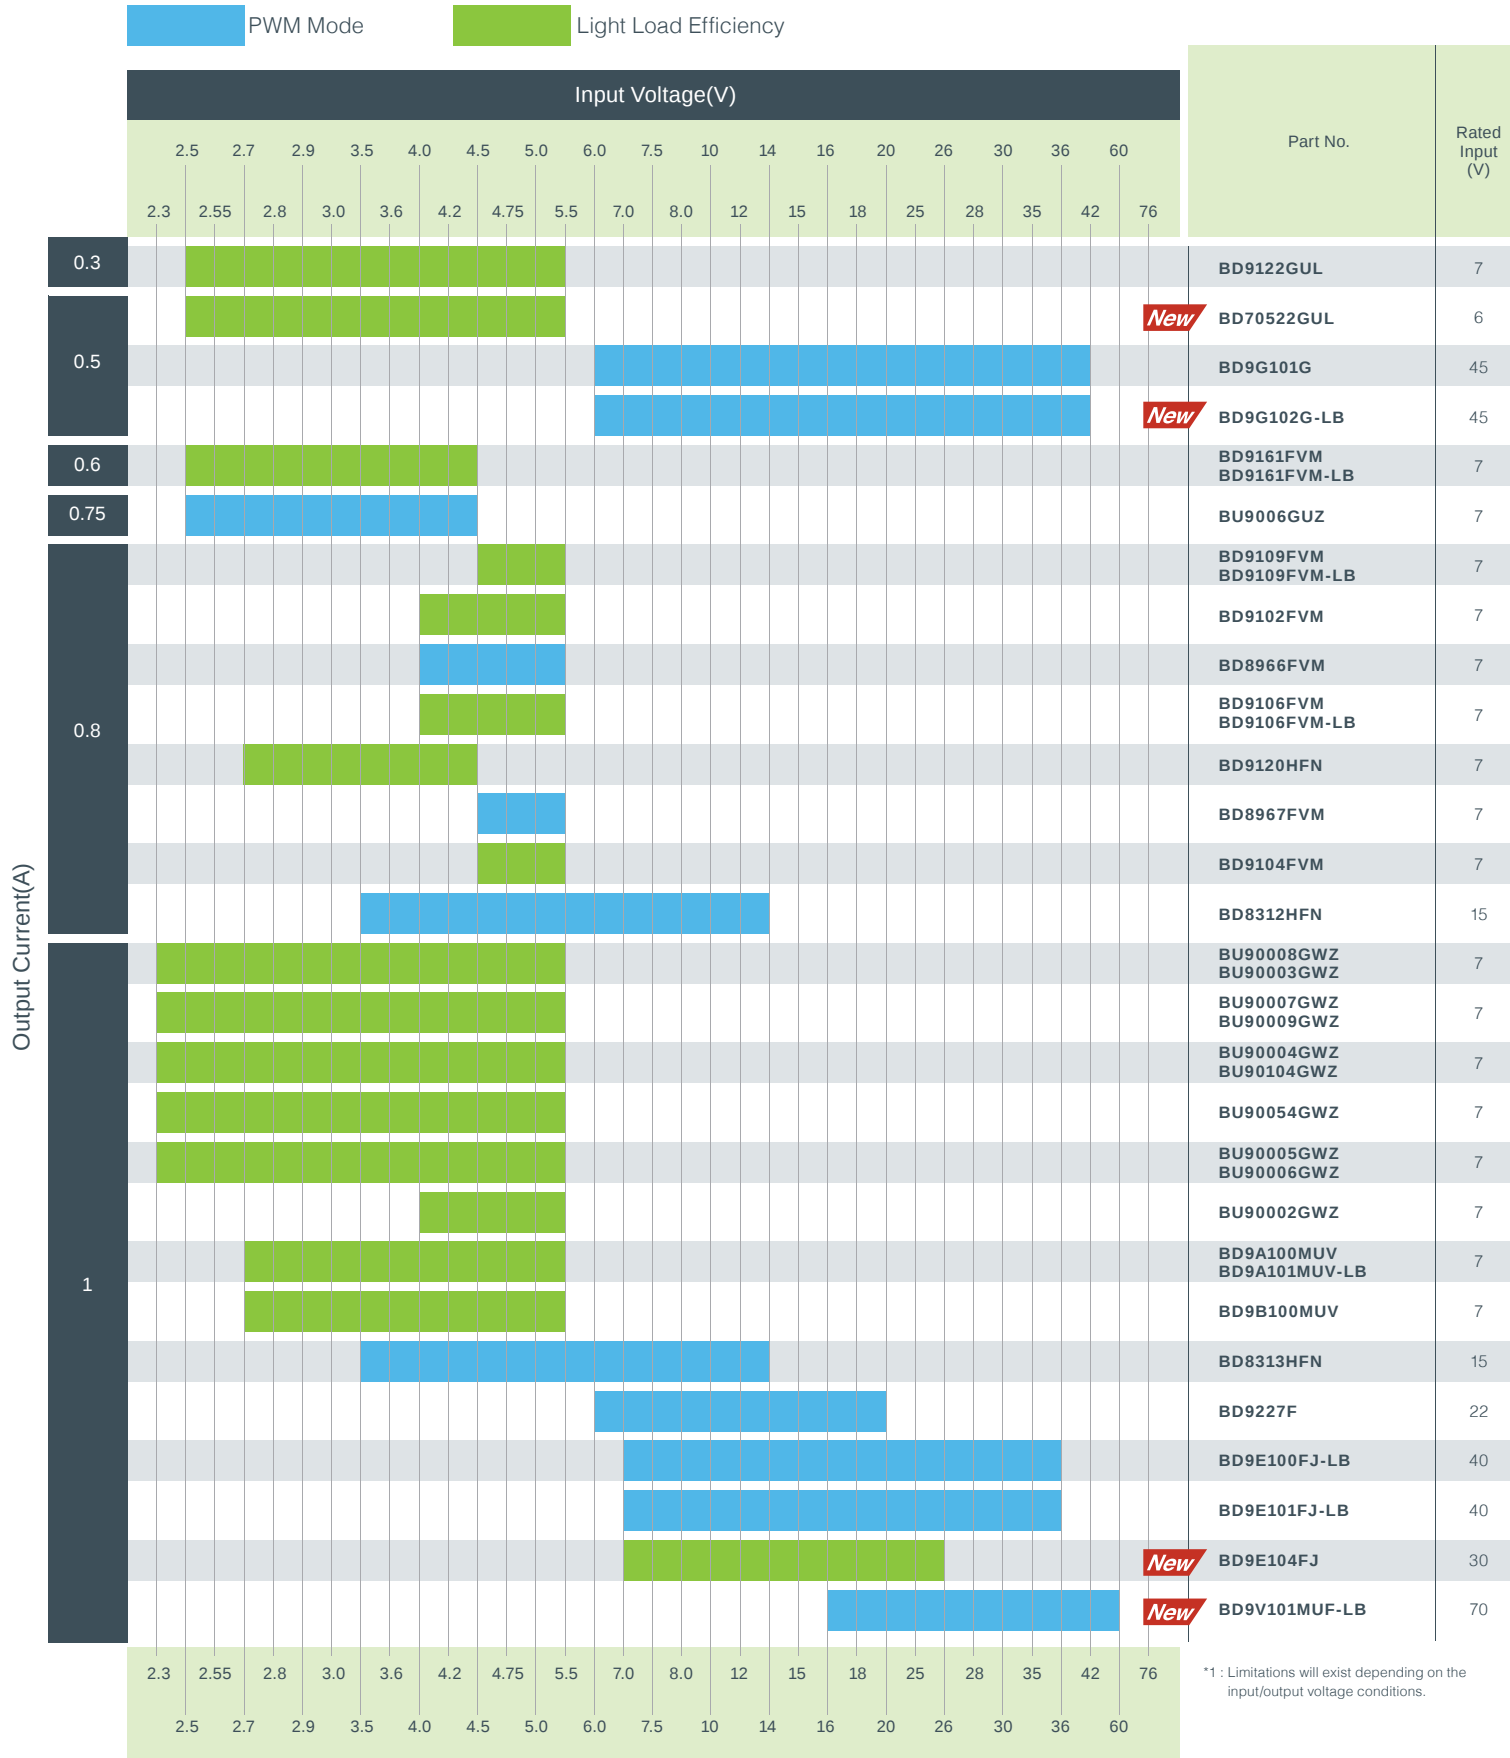

Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions								Other Functions	Operating Temperature (°C)	Package (mm)
					Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Over Voltage Protection			
0.3	2.5 to 5.5	1.0 to 2.0	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	VCSP50L2 (2.5×1.1)
0.5	2.5 to 5.5	1.2 to 3.3*1	1	ON time	✓	—	—	✓	✓	Recovery	Recovery	—	Output discharge, 100% duty, output voltage setting via pin selection	−40 to +85	VCSP50L1C (1.76×1.56×0.57)
0.5	6 to 42	$(V_{IN} \times 0.15)$ to $(V_{IN} \times 0.7)$ $(V_{IN} \times 0.15) \geq 1.0$	1.5	Current	—	—	—	—	—	Recovery	Recovery	—	—	−40 to +105	SSOP6
0.5	6 to 42	$(V_{IN} \times 0.008)$ to $(V_{IN} \times 0.8)$ $(V_{IN} \times 0.008) \geq 0.75$	1	Current	—	—	—	—	—	Recovery	Recovery	Recovery	—	−40 to +85	SSOP6
0.6	2.5 to 4.5	1.0 to 3.3	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	MSOP8
0.75	2.5 to 4.5	0.95 to V_{IN}	2	Current	—	—	—	✓	—	Recovery	Recovery	—	Built-in input/output bypass switch, 100% duty	−35 to +85	VCSP35L1 (1.6×1.6×0.4)
0.8	4.5 to 5.5	3.3	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	MSOP8
0.8	4 to 5.5	1.24	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	MSOP8
0.8	4 to 5.5	1.0 to 2.5	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−25 to +85	MSOP8
0.8	4 to 5.5	1.0 to 2.5	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	MSOP8
0.8	2.7 to 4.5	1.0 to 1.5	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	HSOP8
0.8	4.5 to 5.5	3.3	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−25 to +85	MSOP8
0.8	4.5 to 5.5	3.3	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	MSOP8
0.8	3.5 to 14	1.2 to 12.0	1.5	Voltage	—	—	—	✓	—	—	Recovery	—	—	−25 to +85	HSOP8
1	2.3 to 5.5	1.0 1.2	3.6 4	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	UCSP35L1 (1.3×0.9×0.4)
1	2.3 to 5.5	1.25 1.3	4 4.2	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	UCSP35L1 (1.3×0.9×0.4)
1	2.3 to 5.5	1.8	5.4	ON time	—	—	—	✓	✓	Recovery	Recovery	—	Max output capacitance10μF Max output capacitance100μF	−40 to +85	UCSP35L1 (1.3×0.9×0.4)
1	2.3 to 5.5	1.8	5.4	ON time	—	—	—	✓	✓	Recovery	Recovery	—	Max output capacitance10μF	−40 to +85	UCSP30L1 (1.3×0.9×0.33)
1	2.3 to 5.5	2.5 3.0	6	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	UCSP35L1 (1.3×0.9×0.4)
1	4 to 5.5	3.3	6	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	UCSP35L1 (1.3×0.9×0.4)
1	2.7 to 5.5	0.8 to $(V_{IN} \times 0.7)$	1	Current	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85 −40 to +125	VQFN016V3030
1	2.7 to 5.5	0.8 to $(V_{IN} \times 0.8)$	1 or 2	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	VQFN016V3030
1	3.5 to 14	1.2 to 12.0	1	Voltage	—	—	—	✓	—	—	Recovery	—	—	−40 to +85	HSOP8
1	6 to 20	$(V_{IN} \times 0.252)$ to V_{IN} $(V_{IN} \times 0.252) \geq 1.0$	1	Current	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +85	SOP8
1	7 to 36	$(V_{IN} \times 0.15)$ to $(V_{IN} \times 0.7)$ $(V_{IN} \times 0.15) \geq 1.0$	1	Current	—	—	—	✓	—	Recovery	Recovery	Recovery	—	−40 to +150	SOP-J8
1	7 to 36	$(V_{IN} \times 0.0855)$ to $(V_{IN} \times 0.7)$ $(V_{IN} \times 0.0855) \geq 1.0$	0.57	Current	—	—	—	✓	—	Recovery	Recovery	Recovery	—	−40 to +150	SOP-J8
1	7 to 26	$(V_{IN} \times 0.143)$ to $(V_{IN} \times 0.5)$ $(V_{IN} \times 0.143) \geq 1.0$	0.57	Current	—	—	—	✓	✓	Recovery	Recovery	Recovery	—	−40 to +85	SOP-J8
1	16 to 60	0.8 to 5.5	1.9 to 2.3	Current	✓	—	—	✓	—	Recovery	Recovery	Recovery	—	−40 to +150	VQFN24FV4040

Single Output Buck Converter Selection Guide

1.2A to 2.5A Output

PWM Mode

Light Load Efficiency



≤1A Output

Previous Page

Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions								Other Functions	Operating Temperature (°C)	Package
					Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Over Voltage Protection			
1.2	4 to 5.5	1.0 to 1.8	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−25 to +85	MSOP8
1.2	4 to 5.5	1.0 to 1.8	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +85	MSOP8
1.2	2.7 to 5.5	0.85 to 1.2	1	Current	✓	—	—	✓	✓	Latch	Latch	—	Output voltage setting via 3bit parallel control	−40 to +95	VQFN016V3030
1.2	6 to 28	$(V_{IN} \times 0.06)$ to $(V_{IN} \times 0.7)^{*1}$ $(V_{IN} \times 0.06) \geq 1.0$	0.6	Current	—	—	✓	—	—	Recovery	Recovery	Recovery	—	−40 to +85	VSON008X2030
1.5	2.3 to 5.5	1.23	1	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	VSON008X2030
1.5	2.3 to 5.5	1.175	1	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	VSON008X2030
1.5	8 to 35	1.0 to $(V_{IN} - 3.0)$	0.1	Voltage	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +85	TO220CP-V5
1.5	8 to 35	1.0 to $(V_{IN} - 3.0)$	0.1	Voltage	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +85	TO252-5
1.5	8 to 35	1.0 to $(V_{IN} - 3.0)$	0.3	Voltage	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +85	TO220CP-V5
1.5	8 to 35	1.0 to $(V_{IN} - 3.0)$	0.3	Voltage	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +85	TO252-5
1.5	8 to 35	1.0 to $(0.8 \times (V_{IN} - I_O \times R_{ON}))$	0.9	Voltage	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +85	TO252S-5
1.5	8 to 35	1.0 to $(0.8 \times (V_{IN} - I_O \times R_{ON}))$	0.11	Voltage	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +85	TO220CP-V5
1.5	4.5 to 42	0.8 to V_{IN}^{*1}	0.3	Current	—	✓	—	—	—	Recovery	Recovery	—	—	−40 to +105	HTSOP-J8ES
2	4.5 to 5.5	3.3	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−25 to +105	SON008V5060
2	4.5 to 5.5	3.3	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +105	SON008V5060
2	4.5 to 5.5	1.0 to 2.5	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +105	SON008V5060
2	2.7 to 5.5	1.0 to 2.5 *1	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−25 to +85	HTSOP-J8
2	2.7 to 5.5	1.0 to 2.5 *1	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−25 to +105	SON008V5060
2	2.7 to 5.5	1.0 to 2.5 *1	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +105	HTSOP-J8
2	2.7 to 5.5	1.0 to 2.5 *1	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−25 to +105	SON008V5060
2	2.7 to 5.5	0.8 to $(V_{IN} \times 0.8)$	1 or 2	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	VQFN016V3030
2	4.5 to 13.2	2.5 to 6.0 *1	0.5	Current	—	—	—	✓	✓	Latch	Latch	—	—	−40 to +105	VQFN020V4040
2	7.5 to 15	0.8 to $(V_{IN} \times 0.5)$ $(V_{IN} \times 0.5) \leq 5.5$	0.5 to 0.8	ON time	✓	—	—	✓	—	Latch	Recovery	Latch	—	−20 to +100	VQFN016V3030
2	4.75 to 18	0.9 to $(V_{IN} \times 0.9)$	0.38	Current	—	—	✓	—	—	Recovery	Recovery	—	—	−40 to +85	SOP-J8
2	7 to 35	$(V_{IN} \times 0.06)$ to V_{IN} $(V_{IN} \times 0.06) \geq 1.0$	0.05 to 0.5	Current	—	—	—	—	—	Recovery	Recovery	—	100% duty	−40 to +125	HRP7
2.5	7 to 36	$(V_{IN} \times 0.15)$ to $(V_{IN} \times 0.7)$ $(V_{IN} \times 0.15) \geq 1.0$	1	Current	—	—	—	✓	—	Recovery	Recovery	Recovery	—	−40 to +150	HTSOP-J8
2.5	7 to 36	$(V_{IN} \times 0.0855)$ to $(V_{IN} \times 0.7)$ $(V_{IN} \times 0.0855) \geq 1.0$	0.57	Current	—	—	—	✓	—	Recovery	Recovery	Recovery	—	−40 to +150	HTSOP-J8

Single Output Buck Converter Selection Guide

3A Output



Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions								Other Functions	Operating Temperature (°C)	Package
					Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Over Voltage Protection			
3	2.7 to 5.5	0.8 to 2.5 ^{*1}	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−40 to +105	VQFN020V4040
3	2.7 to 5.5	0.8 to 3.3 ^{*1}	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−40 to +105	VQFN020V4040
3	2.7 to 5.5	1.0 to 2.5 ^{*1}	1	Current	—	—	—	✓	—	Latch	Latch	—	—	−25 to +85	HTSOP-J8
3	4.5 to 5.5	3.3	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−40 to +105	VQFN020V4040
3	2.7 to 5.5	0.8 to 3.3 ^{*1}	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−40 to +105	VQFN016V3030
3	2.7 to 5.5	0.8 to (V _{IN} ×0.7)	1	Current	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85 −40 to +125	VQFN016V3030
3	2.7 to 5.5	0.8 to (V _{IN} ×0.8)	1 or 2	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85 −40 to +125	VQFN016V3030
3	2.7 to 5.5	0.8 to (V _{IN} ×0.7)	1	Current	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	UMMP008AZ020
3	2.7 to 5.5	0.8 to (V _{IN} ×0.8)	1 or 2	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	UMMP008AZ020
3	2.7 to 5.5	0.6 to (V _{IN} ×0.8)	1	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	Output Discharge	−40 to +85	VMMP08LZ2020 (2.0×2.0×0.4)
3	2.7 to 5.5	0.6 to (V _{IN} ×0.8)	1.3	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	UCSP35L1 (1.98×1.8×0.4)
3	4.5 to 18	(V _{IN} ×0.125) to (V _{IN} ×0.7) (V _{IN} ×0.125)≥0.8	0.5	Current	—	—	—	✓	—	Latch	Recovery	—	—	−40 to +85 −40 to +125	SOP-J8
3	7.5 to 15	0.8 to (V _{IN} ×0.5) (V _{IN} ×0.5)≤5.5	0.5 to 0.8	ON time	✓	—	—	✓	—	Latch	Recovery	Latch	—	−20 to +100	VQFN016V3030
3	4.0 to 17	0.9 to 5.25 (V _{IN} ×0.125) to V _{IN}	1.25	ON time	✓	—	✓	✓	✓	Recovery	Recovery	Latch	—	−40 to +85	VQFN016V3030
3	4.5 to 18	0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON time	—	—	✓	✓	—	Recovery	Recovery	—	—	−40 to +85	HTSOP-J8
3	4.5 to 18	0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON time	—	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	HTSOP-J8
3	4.5 to 18	0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON time	—	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	UMMP008Z2020 (2.0×2.0×0.4)
3	4.5 to 18	0.765 to 7.0 (V _{IN} ×0.07) to (V _{IN} ×0.65)	0.7	ON time	—	—	✓	✓	—	Recovery	Recovery	—	—	−40 to +85	UMMP008Z2020 (2.0×2.0×0.4)
3	5 to 14	1.0 to (V _{IN} ×0.7)	0.75	Current	—	—	—	—	—	Recovery	Recovery	—	—	−40 to +85	HTSOP-J8
3	4.75 to 18	0.9 to (V _{IN} ×0.9)	0.38	Current	—	—	✓	—	—	Recovery	Recovery	—	—	−40 to +85	HTSOP-J8
3	7 to 28	(V _{IN} ×0.143) to (V _{IN} ×0.7) (V _{IN} ×0.143)≥1.0	0.55	Current	—	—	—	✓	✓	Recovery	Recovery	Recovery	—	−40 to +85	HTSOP-J8
3	7 to 36	(V _{IN} ×0.06) to (V _{IN} ×0.8) (V _{IN} ×0.06)≥1.0	0.3	Current	—	—	—	✓	—	Recovery	Recovery	Recovery	—	−40 to +150	HTSOP-J8
3	8 to 35	1.0 to (V _{IN} −3.0)	0.11	Voltage	—	—	—	—	—	Recovery	Recovery	—	—	−40 to +85	TO220CP-V5
3	8 to 35	1.0 to (0.8×(V _{IN} −I _O ×R _{ON}))	0.11	Voltage	—	—	—	—	—	Recovery	Recovery	—	—	−40 to +85	TO220CP-V5
3	4.5 to 28	0.7 to 5.0	0.2 to 1.0	ON time	✓	—	✓	✓	✓	Latch	Recovery	Recovery	Output Discharge	−10 to +100	VQFN032V5050
3	12 76	1.0 to V _{IN} ^{*1}	0.05 to 0.75	Current	—	—	—	—	—	Recovery	Recovery	Recovery	—	−40 to +85	HTSOP-J8


Single Output Buck Converter Selection Guide

3.5A to 8.0A Output




Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions							Other Functions	Operating Temperature (°C)	Package (mm)	
					Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown				Over Voltage Protection
3.5	4.5 to 42	0.8 to V_{IN} *1	0.3	Current	—	✓	—	—	—	Recovery	Recovery	—	—	−40 to +105	HTSOP-J8ES
4	2.7 to 5.5	0.8 to 3.3 *1	1	Current	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +105	VQFN020V4040
4	2.7 to 5.5	0.8 to 3.3 *1	1	Current	—	—	—	✓	✓	Latch	Latch	—	Output voltage setting via 2bit parallel control Output discharge	−40 to +105	VQFN020V4040
4	2.7 to 5.5	0.8 to ($V_{IN} \times 0.7$)	1	Current	✓	—	✓	✓	✓	Recovery	Recovery	—		—	−40 to +85
4	2.7 to 5.5	0.8 to ($V_{IN} \times 0.8$)	1 or 2	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	VQFN016V3030
4	4.5 to 18	($V_{IN} \times 0.125$) to ($V_{IN} \times 0.7$) ($V_{IN} \times 0.125$) ≥ 0.8	0.5	Current	—	—	—	✓	—	Latch	Recovery	—	—	−40 to +85	HTSOP-J8
4	7.5 to 15	0.8 to ($V_{IN} \times 0.5$) ($V_{IN} \times 0.5$) ≤ 5.5	0.5 to 0.8	ON time	✓	—	—	✓	—	Latch	Recovery	Latch	—	−20 to +100	VQFN016V3030
4	4.75 to 18	0.9 to ($V_{IN} \times 0.9$)	0.38	Current	—	—	✓	—	—	Recovery	Recovery	—	—	−40 to +85	HTSOP-J8
4	4.5 to 28	0.7 to 5.0	0.2 to 1.0	ON time	✓	—	✓	✓	✓	Latch	Recovery	Latch	Output discharge	−10 to +100	VQFN032V5050
5	2.9 to 5.5	0.8 to ($V_{IN} \times 0.8$)	1.7	ON time	✓	—	✓	✓	✓	Latch	Recovery	—	—	−40 to +105	VQFN20U4040M
5	2.7 to 5.5	0.8 to ($V_{IN} \times 0.8$)	1 or 2	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	VQFN016V3030
5	4.5 to 18	($V_{IN} \times 0.075$) to ($V_{IN} \times 0.7$) ($V_{IN} \times 0.075$) ≥ 0.8	0.5	Current	—	—	—	✓	—	Latch	Recovery	—	—	−40 to +85	HTSOP-J8
5	4.5 to 36	0.6 to 14 *1	0.6/1/2.2	ON time	✓	—	✓	✓	✓	Recovery	Recovery	Recovery	—	−40 to +85	VMMP16LZ3030 (3.0×3.0×0.4)
6	2.7 to 5.5	0.8 to ($V_{IN} \times 0.7$)	1	Current	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	VQFN016V3030
6	2.7 to 5.5	0.8 to ($V_{IN} \times 0.8$)	1 or 2	ON time	✓	—	✓	✓	✓	Recovery	Recovery	—	—	−40 to +85	VQFN016V3030
6	7.5 to 18	0.8 to ($V_{IN} \times 0.5$) ($V_{IN} \times 0.5$) ≤ 5.5	0.35 to 0.8	ON time	✓	—	—	✓	—	Latch	Recovery	Latch	—	−20 to +100	VQFN024V4040
6	4.5 to 18	($V_{IN} \times 0.075$) to ($V_{IN} \times 0.7$) ($V_{IN} \times 0.075$) ≥ 0.8	0.5	Current	—	—	—	✓	—	Latch	Recovery	—	—	−40 to +85	HTSOP-J8
6	3 to 20	0.7 to 5.0	0.2 to 1.0	ON time	✓	—	✓	✓	✓	Latch	Recovery	Recovery	Output discharge	−10 to +100	VQFN040V6060
8	4.5 to 28	0.765 to 13.5 *1	0.3/0.6	ON time	✓	—	—	✓	—	Recovery	Recovery	—	—	−40 to +85	VQFN11X3535A

Dual Output Buck Converter Selection Guide

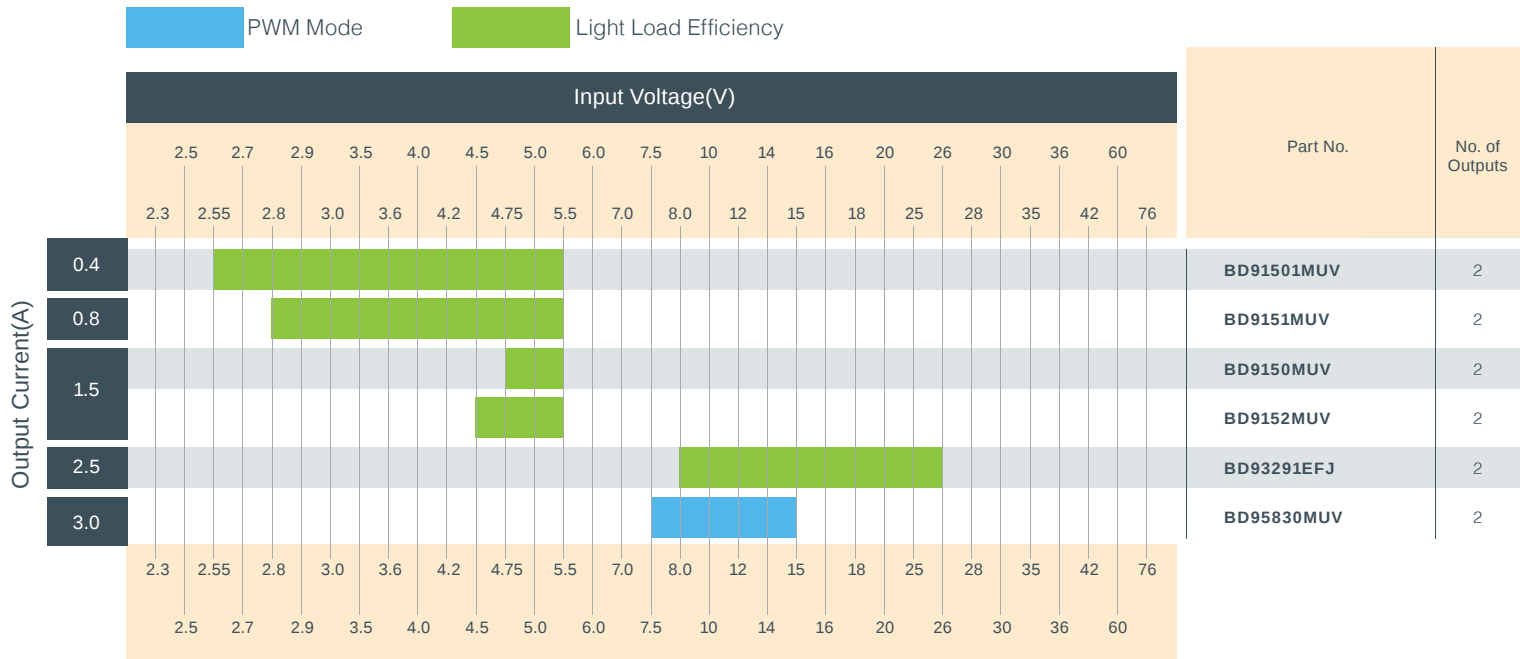

Buck Controller (External Switch) Selection Guide

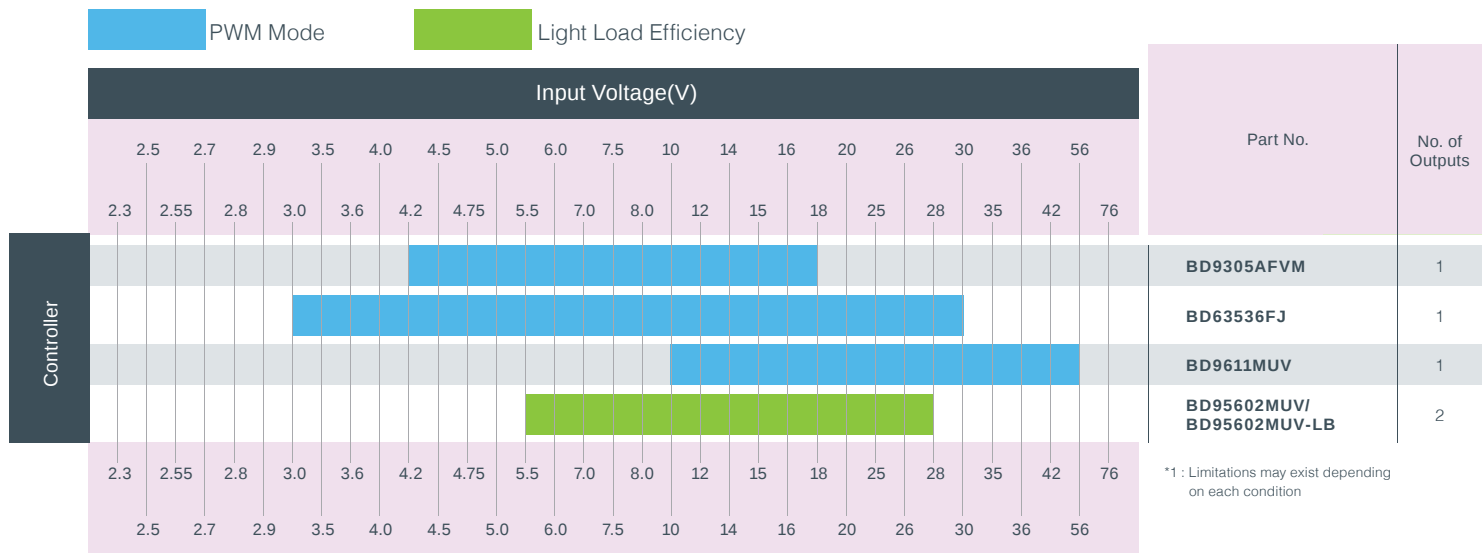


Rated Input (V)	Output Current (A)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions								Other Functions	Operating Temperature (°C)	Package
						Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Over Voltage Protection			
7	Io1 : 0.4 Io2 : 0.3	2.55 to 5.5	Vo1 : 2.55 Vo2 : 1.80	1.65	Current	—	—	—	✓	✓	Latch	Recovery	—	100% duty	−30 to +105	VQFN016V3030
7	Io1 : 0.4 Io2 : 0.8	2.8 to 5.5	Vo1 : 1.8 Vo2 : 1.2	1	Current	—	—	—	✓	✓	Latch	Latch	—	Voltage detector High side gate controller	−40 to +85	VQFN020V4040
7	Io1 : 1.5 Io2 : 1.5	4.75 to 5.5	Vo1 : 3.3 Vo2 : 0.8 to 2.5	1.5	Current	—	—	—	✓	✓	Latch	Latch	—	—	−40 to +85	VQFN020V4040
7	Io1 : 1.5 Io2 : 1.5	4.5 to 5.5	Vo1 : 3.3 Vo2 : 0.8 to 2.5	1	Current	—	—	—	✓	✓	Latch	Latch	—	—	−40 to +85	VQFN020V4040
30	Io1 : 2.5 Io2 : 1.5	8 to 26	Vo1 : 5.0 Vo2 : 0.8 to 4.0	1.5 to 2.5	ON time	—	—	—	✓	✓	Recovery	Recovery	—	—	−40 to +85	HTSOP-J8
15.1	Io1 : 3.0 Io2 : 3.0	7.5 to 15	Vo1 : 0.8 to 5.5 Vo2 : 0.8 to 5.5	0.4 to 0.8	ON time	—	—	—	✓	—	Latch	Recovery	Latch	—	−20 to +100	VQFN032V5050

Rated Input (V)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (MHz)	Control Method	Functions								Other Functions	Operating Temperature (°C)	Package
					Power Good	External Synchronization	Adjustable Soft Start	Synchronous Rectification	Light Load Efficiency	Over Current Protection	Thermal Shutdown	Over Voltage Protection			
20	4.2 to 18	1.25 to V_{IN}^{*1}	0.1 to 0.8	Voltage	—	—	—	—	—	Latch	Recovery	—	—	−40 to +85	MSOP8
32	3 to 30	1.25 to V_{IN}^{*1}	0.01 to 0.3	Voltage	—	—	—	—	—	Recovery	Recovery	Recovery	—	−25 to +85	SOP-J8
60	10 to 56	1.0 to ($V_{IN} \times 0.8$)	0.05 to 0.5	Voltage	—	—	✓	✓	—	Recovery	Recovery	—	Supports pre-bias, variable UVLO	−40 to +105	VQFN020V4040
30	5.5 to 28	1.0 to 5.5	0.15 to 0.5	ON time	✓	✓	✓	✓	✓	Latch	Recovery	Recovery	Output discharge, 3.3V LDO, 5V LDO	−20 to +85	VQFN032V5050

Boost Converter Selection Guide



Boost Controller (External Switch) Selection Guide

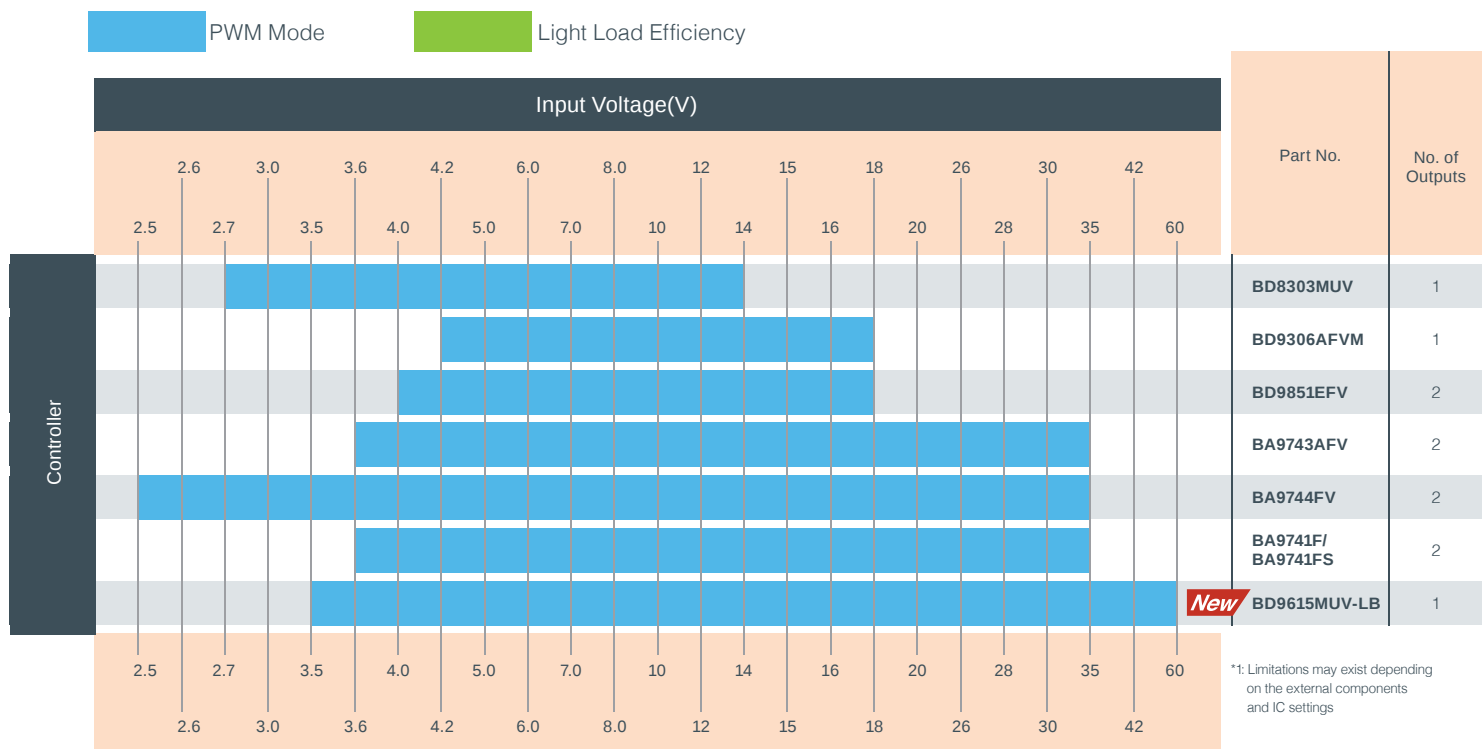

Rated Input (V)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (kHz)	Control Method	Functions										Operating Temperature (°C)	Package (mm)	
					Boost	Buck-Boost	SEPIC	Inverting	Synchronous Rectification	Light Load Efficiency	Soft Start	Input Pass-Through	UVLO	Overcurrent Protection			Thermal Shutdown
10	1.75 to 4.5	3.3	100	Current	✓	—	—	—	✓	—	—	—	—	Recovery	✓	−40 to +85	SSOP5
300	1.8 to 5.5	3.3	600	Current	✓	—	—	—	✓	✓	✓	✓	✓	Recovery	✓	−40 to +85	VSON010V3030
300	1.8 to 5.5	3.4	600	Current	✓	—	—	—	✓	✓	✓	✓	✓	Recovery	✓	−40 to +85	VSON010V3030
500	0.6 to 4.5	3.3	800	Current	✓	—	—	—	✓	✓	✓	✓	✓	Recovery	✓	−40 to +85	VSON010X3020
600	2.5 to 4.5	±5.4	500/1,000	Current	✓	—	—	✓	✓	—	—	—	✓	Latch	✓	−40 to +85	UCSP50L1C(1.8×1.5×0.57) VQFN20PV3535
1,000	2.5 to 5.5	Vo1 : −9.0 to −1.0 Vo2 : V _{IN} to 18	1,600	Current	✓	—	—	✓	—	—	✓	—	✓	Latch	✓	−35 to +85	UCSP50L1(1.8×1.5×0.5)
1,000	2.5 to 5.5	Vo1 : −9.0 to −1.0 Vo2 : V _{IN} to 18	800	Current	✓	—	—	✓	—	—	✓	—	✓	Latch	✓	−35 to +85	UCSP50L1(1.8×1.5×0.5)
1,400	2.5 to 5.5	V _{IN} to 14	600/1,200	Current	✓	—	✓	—	—	—	Variable	—	✓	Recovery	✓	−40 to +85	MSOP8
1,400	2.1 to 4	V _{IN} to 14	600/1,200	Current	✓	—	✓	—	—	—	Variable	—	✓	Recovery	✓	−40 to +125	MSOP8
2,000	2.0 to 5.5	2.5/3.3	1,500	Current	—	✓	—	—	✓	✓	✓	—	✓	Recovery	✓	−40 to +85	UCSP50L1C(1.2×1.6×0.57)
2,000	1.8 to 5.5	1.8 to 5.2	300 to 2,000	Voltage	—	✓	—	—	✓	—	✓	—	✓	Latch	✓	−40 to +85	VQFN016V3030
2,500	3 to 12	4.0 to 12	1,200	Voltage	✓	—	—	—	—	—	✓	—	✓	Latch	✓	−25 to +85	VSON010V3030
2,500	3.5 to 11	4.0 to 11	1,200	Voltage	✓	—	—	—	—	—	✓	—	✓	Latch	✓	−25 to +85	VSON010V3030

Rated Input (V)	Input Voltage (V)	Output Voltage (V)	Switching Frequency (kHz)	Control Method	Functions								Other Functions	Operating Temperature (°C)	Package	
					Boost	Buck-Boost	Inverting	Buck	Enable	Adjustable Soft Start	Synchronous Rectification	Short-Circuit Protection				Thermal Shutdown
15	2.7 to 14	1.8 to 12	200 to 1,000	Voltage	—	✓	—	—	✓	—	✓	Latch	Recovery	—	−25 to +85	VQFN016V3030
20	4.2 to 18	V _{IN} to (V _{IN} /0.3)	100 to 800	Voltage	✓	—	—	—	✓	—	—	Latch	Recovery	—	−40 to +85	MSOP8
20	4 to 18	1.0 or more *1	10 to 3,000	Voltage	✓	—	✓	✓	—	✓	—	Latch	Recovery	—	−40 to +85	HTSSOP-B20
36	3.6 to 35	2.505 or more *1	10 to 800	Voltage	✓	—	✓	✓	—	✓	—	Latch	Recovery	Dead time adjustment	−40 to +85	SSOP-B16
36	2.5 to 35	1.222 or more *1	10 to 800	Voltage	✓	—	✓	✓	—	✓	—	Latch	Recovery	Dead time adjustment	−40 to +85	SSOP-B16
36	3.6 to 35	2.5 or more *1	10 to 800	Voltage	✓	—	✓	✓	—	✓	—	Latch	Recovery	Dead time adjustment	−40 to +85	SOP16/ SSOP-A16
62	3.5 to 60	V _{IN} to (V _{IN} /0.2)	100 to 2,500	Voltage	✓	—	—	—	✓	✓	—	Recovery	Recovery	External synchronization Power Good	−40 to +105	VQFN16KV3030

Isolated DC/DC Power Supplies

Part No.	Output Power (W)	Rated Input (V)	Allowable Switch Current (A)	Input Voltage (V)	Switching Frequency (kHz)	Control Method	Functions						Operating Junction Temperature (°C)	Package
							Enable	Soft Start	Light Load Efficiency	UVLO	Over Current Protection	Thermal Shutdown		
BD7F100HFN-LB/ BD7F100EFJ-LB	1W(at 5.0V V_{IN}) 5W(at 24V V_{IN})	45	1.25	3.0 to 40	400	Adaptive ON time	✓	✓	✓	✓	Recovery	Recovery	−40 to +125	HS0N8/ HTSOP-J8
BD7F200HFN-LB/ BD7F200EFJ-LB	2W(at 5.0V V_{IN}) 10W(at 24V V_{IN})	45	2.75	5.0 to 40	400	Adaptive ON time	✓	✓	✓	✓	Recovery	Recovery	−40 to +125	HS0N8/ HTSOP-J8
☆ BD7J200HFN-LA/ BD7J200EFJ-LA	10W(at 48V V_{IN})	80	1.38	8.0 to 80	400	Adaptive ON time	✓	✓	✓	✓	Recovery	Recovery	−40 to +125	HS0N8/ HTSOP-J8

☆: Under Development

For the full lineup of power supply ICs, please visit ROHM's website, which offers technical materials and tools including datasheets, application notes, reference circuits, evaluation boards, and Spice models.

The screenshot shows the ROHM website homepage. Red arrows highlight the following sections:

- Products**: A dropdown menu is open, showing categories like ICs, Discrete Semiconductors, Power Devices, Passive Devices, Modules (Sub Systems), Opto Devices, and Commercial Products. A red arrow points to the **Semiconductors** link.
- Design supporting tool**: A list of tools including AC/DC Designer, DC/DC Designer, LDO Finder, Reference Designs, AC/DC Design Library, MOSFET Selection for asynchronous rectification DC/DC, Thermal calculations tool (Motor driver), MOSFET Selection of Load Switch, Digital transistor Selection Tool, Resistor calculation tool, and TCR (Temperature Coefficient of Resistance) calculator. A red arrow points to the **DC/DC Designer** link.
- Application Notes and Design Simulation Models**: A section for users' guides, SPICE, Thermal, Frequency, Characteristic, and IBS model. A red arrow points to the **SPICE** link.
- Tech Web**: A section for technical information for power supply ICs. A red arrow points to the **Tech Web** link.

Below the main navigation, there are sections for **NEWS**, **EVENTS**, **GENERAL TERMS & CONDITIONS (EUROPE)**, **ROHM ENGINEERING TIPS**, **DEVELOPER PLUS**, and **Electronics Basics**. At the bottom, there are links for **Blog**, **Formula E**, and **"Social Device" Special Interview**.

Tech Web, a dedicated technical site for power supply ICs, provides technical information useful for designers seeking basic knowledge on power ICs along with seminar information.

- 1) The information contained in this document is current as of May 1st, 2020.
- 2) The information contained herein is subject to change without notice. Before you use our Products, please contact our sales representative (as listed below) and verify the latest specifications.
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative: transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrant that such information is error-free and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office as listed below. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.

ROHM Sales Offices

Contact us for further information about the products.

Santa Clara	+1-408-720-1900	Nuremberg	+49-911-810452-26	Shanghai	+86-21-6072-8612	Kyoto	+81-75-365-1077
Atlanta	+1-770-754-5972	France	+33 (0) 1 40 60 87 30	Shenzhen	+86-755-8307-3008	Yokohama	+81-45-476-2121
Boston	+1-781-565-1138	United Kingdom	+44-1-908-272400	Hong Kong	+852-2740-6262		
Chicago	+1-847-368-1006	Finland	+358-400-726 124	Taiwan	+886-2-2500-6956		
Detroit	+1-248-348-9920	Spain	+34-9375-24320	Singapore	+65-6436-5100		
San Diego	+1-858-625-3600	Hungary	+36-1-950-5859	Philippines	+63-2-8807-6872		
Mexico	+52-33-3123-2001	Italy	+39-039-5783432	Thailand	+66-2-254-4890		
Germany	+49-2154-921-0	Seoul	+82-2-8182-700	Malaysia	+60-3-7931-8155		
Stuttgart	+49-711-7272370	Beijing	+86-10-8525-2483	India	+91-80-4125-0811		

ROHM Co., Ltd.

21 Saiin Mizosaki-cho, Ukyo-ku,
Kyoto 615-8585 Japan
TEL : +81-75-311-2121 FAX : +81-75-315-0172

www.rohm.com



R1109A