





















































Packages

●Dimensions (Unit: mm)

DFN0604-3 (VML0604) 	DFN0806-3 (VML0806) 	DFN1006-3 (VML1006) 	DSN1006-3 (SMM1006) 	SOT-723 (VMT3) 
SOT-416FL (EMT3F) 	SOT-416 (EMT3) 	SOT-553 (EMT5) 	SOT-563 (EMT6) 	SOT-323FL (UMT3F) 
SOT-323 (UMT3) 	SOT-353 (UMT5) 	SOT-363 (UMT6) 	TO-263AB SOT-23 (SST3) 	TO-236 SOT-346 (SMT3) 
SOT-25 (SMT5) 	SOT-457 (SMT6) 	SOT-323T (TUMT3) 	SOT-353T (TUMT5) 	SOT-363T (TUMT6) 
SOT-346T (TSMT3) 	SOT-25T (TSMT5) 	SOT-457T (TSMT6) 	(TSMT8) 	
DFN1010-3 (DFN1010-3) 	DFN1010-3W (DFN1010-3W) 	DFN1212-3 (DFN1212-3) 	DFN1616-6 (DFN1616-6) 	
DFN1616-6W (DFN1616-6W) 	DFN1616-7T (HEML1616L7) 	DFN2020-3S (HUML2020L3) 	DFN2020-8S (HUML2020L8) Single 	

Note1: (): ROHM Packages at package site.
 Note2: For details of dimensions, please refer to the technical specifications.

Dimensions (Unit: mm)
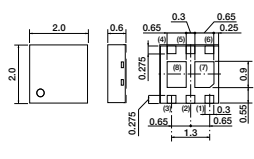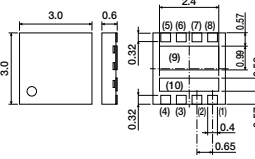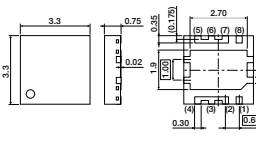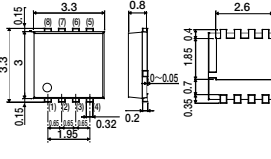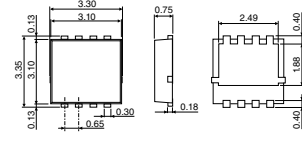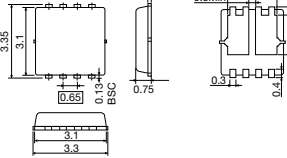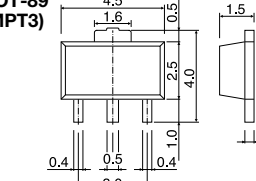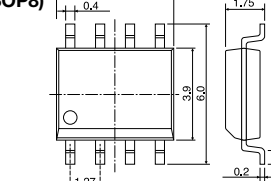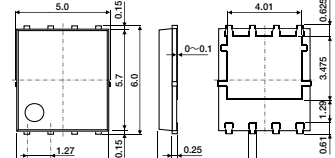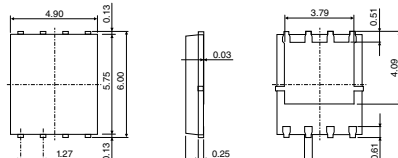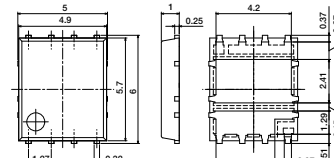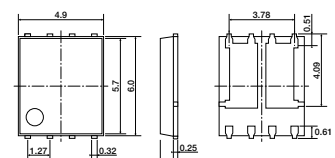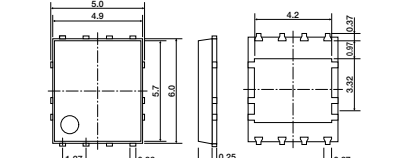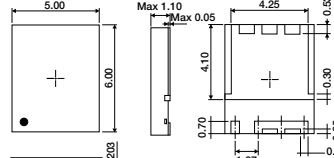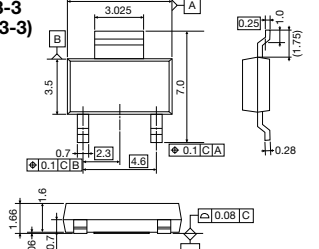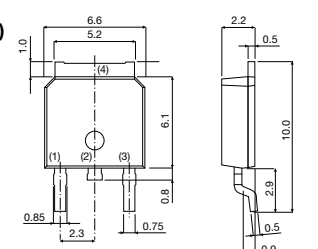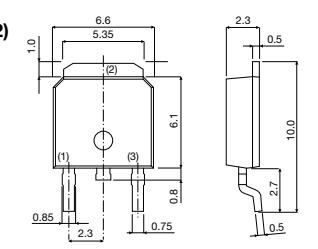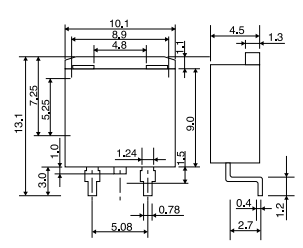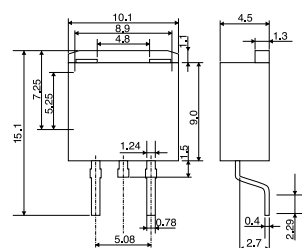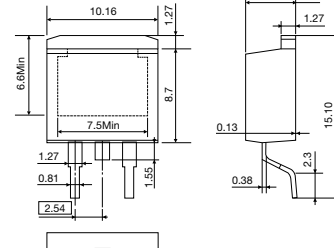
<p>DFN2020-8D (HUML2020L8) Dual</p> 	<p>(HSML3030L10)</p> 	<p>DFN3333-9DC (HSML3333L9)</p> 	<p>(HSMT8)*1 Single</p> 
<p>(HSMT8)*2 Single</p> 	<p>(HSMT8) Dual</p> 	<p>TO-243 SOT-89 (MPT3)</p> 	<p>SOP8 (SOP8)</p> 
<p>HSOP8*1 (HSOP8) Single</p> 	<p>HSOP8*2 (HSOP8) Single</p> 	<p>HSOP8 (HSOP8) Asymmetry Dual</p> 	
<p>HSOP8 (HSOP8) Symmetry Dual</p> 	<p>HSOP8 (HSOP8) Drain Common Dual</p> 	<p>DFN5060-8S (DFN5060T8LSHAAE)</p> 	
<p>TO-261 SOT-223-3 (SOT-223-3)</p> 	<p>TO-252*3 DPAK (TO-252)</p> 	<p>TO-252*4 DPAK (TO-252)</p> 	
<p>TO-263S D2PAK (LPTS)</p> 	<p>TO-263AB (LPTL)</p> 	<p>TO-263AB (TO-263AB-3LSHYAD)</p> 	

Note1: *1 Taping code: TB, *2 Taping code: TB1


Note2: *3 Taping code: TL, *4 Taping code: TL1

Note3: () : ROHM Packages at package site.

Note4: For details of dimensions, please refer to the technical specifications.

Packages

●Dimensions (Unit: mm)

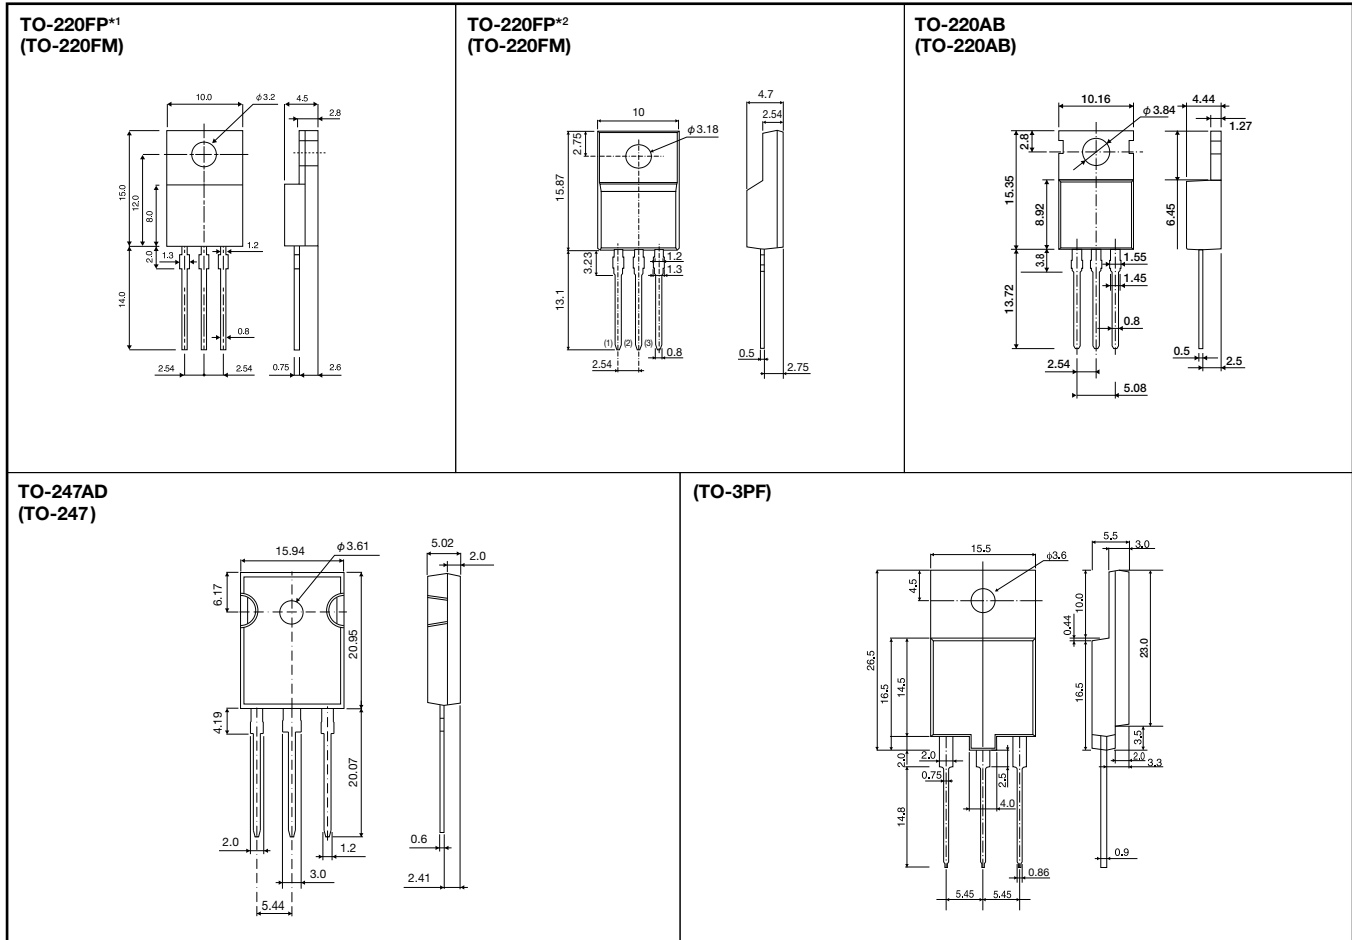

Note1: *1 Packing code: —, *2 Packing code: C7 G
 Note2: () : ROHM Packages at package site.
 Note3: For details of dimensions, please refer to the technical specifications.

● Packaging type

	Package				Size (mm)	Height (mm)	Packing Code	Packing from	Direction	Quantity (pcs)	
	GENERAL Code	JEDEC Code	ROHM Package	JEITA Code							
Surface Mount type	DFN0604-3	—	(VML0604)	—	0604	0.36	T2L, T2CL	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	8,000	
	DFN0806-3	—	(VML0806)	—	0806	0.36	T2L, T2CL	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	8,000	
	DFN1006-3	—	(VML1006)	SC-101	1006	0.37	T2L, T2CL	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	8,000	
	DSN1006-3	—	(SMM1006)	—	1006	0.22	T5CL	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	15,000	
	SOT-723	—	(VMT3)	SC-105AA	1212	0.5	T2L, T2CL	Embossed tape	One terminal on sprocket hole side	8,000	
	SOT-416FL	—	(EMT3F)	SC-89	1616	0.7	TL, TCL	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-416	—	(EMT3)	SC-75A	1616	0.7	TL, TCL	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-553	—	(EMT5)	SC-107BB	1616	0.5	T2R, T2CR	Embossed tape	Three terminals on sprocket hole side	8,000	
	SOT-563	—	(EMT6)	SC-107C	1616	0.5	T2R, T2CR	Embossed tape	Terminal No.1 on sprocket hole side	8,000	
	SOT-323FL	—	(UMT3F)	SC-85	2120	0.9	TL, TCL	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-323	—	(UMT3)	SC-70	2120	0.9	T106, T306	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-353	—	(UMT5)	SC-88A	2120	0.9	TR, TCR	Embossed tape	Three terminals on sprocket hole side	3,000	
	SOT-363	—	(UMT6)	SC-88	2120	0.9	TR, TCR TN, TCN	Embossed tape	Terminal No.1 on sprocket hole side Non-direction	3,000	
	SOT-323T	—	(TUMT3)	SC-113A	2120	0.77	TL, TCL	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-353T	—	(TUMT5)	SC-113CA	2120	0.77	TR, TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	SOT-363T	—	(TUMT6)	SC-113DA	2120	0.77	TR, TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	SOT-23	TO-236AB	(SST3)	—	2429	0.95	T116, T316	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-346	TO-236	(SMT3)	SC-59	2829	1.1	T146	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-25	—	(SMT5)	SC-74A	2829	1.1	T148	Embossed tape	Three terminals on sprocket hole side	3,000	
	SOT-457	—	(SMT6)	SC-74	2829	1.1	T108 T110	Embossed tape	Terminal No.1 on opposite side from sprocket hole side Non-direction	3,000	
	SOT-346T	—	(TSMT3)	SC-96	2928	0.85	TL, TCL	Embossed tape	One terminal on sprocket hole side	3,000	
	SOT-25T	—	(TSMT5)	—	2928	0.85	TR, TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	SOT-457T	—	(TSMT6)	SC-95	2928	0.85	TR, TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	—	—	(TSMT8)	—	3028	0.8	TR, TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	DFN1010-3	—	(DFN1010-3)	—	1010	0.4	G2CR	Embossed tape	Terminal No.1 on sprocket hole side	8,000	
	DFN1010-3W	—	(DFN1010-3) W	—	1010	0.4	G2CR	Embossed tape	Terminal No.1 on sprocket hole side	8,000	
	DFN1212-3	—	(DFN1212-3)	—	1212	0.45	TCR1	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	DFN1616-6	—	(DFN1616-6)	—	1616	0.75	TCR1	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	DFN1616-6W	—	(DFN1616-6W)	—	1616	0.75	TCR1	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	DFN1616-7T	—	(HEML1616L7)	—	1616	0.6	TCL1	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	3,000	
	DFN2020-3S	—	(HUML2020L3)	—	2020	0.6	TR, TCR	Embossed tape	Terminal No.1 on opposite side from sprocket hole side	3,000	
	DFN2020-8D	—	(HUML2020L8)	—	2020	0.6	TR, TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	DFN2020-8S	—	(HUML2020L8)	—	2020	0.6	TR, TCR	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	—	—	(HSML3030L10)	—	3030	0.6	TB	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	DFN3333-9DC	—	(HSML3333L9)	—	3333	0.75	TCR1	Embossed tape	Terminal No.1 on sprocket hole side	1,000	
	—	—	(HSMT8)	—	3333	0.8	TB, TB1	Embossed tape	Terminal No.1 on sprocket hole side	3,000	
	SOT-89	TO-243	(MPT3)	SC-62	4540	1.5	T100	Embossed tape	Three terminals on sprocket hole side	1,000	
	SOP8	—	(SOP8)	—	5060	1.75	TB, TB1	Embossed tape	Terminal No.1 on sprocket hole side	2,500	
	HSOP8	—	(HSOP8)	—	5060	1	TB, TB1	Embossed tape	Three terminals on sprocket hole side	2,500	
	DFN5060-8S	—	(DFN5060T8LSHAAE)	—	5060	1	TB1	Embossed tape	Terminal No.1 on sprocket hole side	2,500	
	SOT-223-3	TO-261	(SOT-223-3)	—	6.5×7.0	1.66	TL1	Embossed tape	Fin on sprocket hole side	4,000	
	DPAK	TO-252	(TO-252)	—	10.0×6.6	2.2	TL, TL1	Embossed tape	Fin on sprocket hole side	2,500	
	D2PAK	TO-263S	(LPTS)	SC-83	13.1×10.1	4.5	TL	Embossed tape	Fin on sprocket hole side	1,000	
	—	TO-263AB	(LPTL)	—	15.1×10.1	4.5	TLL TL1	Embossed tape	Fin on sprocket hole side	1,000 800	
	Leaded type	—	TO-220FP	(TO-220FM)	—	29×10	4.5 4.7	— C7,G	Bulk Tube	—	500 1,000
		—	TO-220AB	(TO-220AB)	—	29.07×10.16	4.5	C16	Tube	—	1,000
		—	—	(TO-3PF)	—	43.8×15.5	5.5	C17	Tube	—	300
		—	—	(TO-247)	—	41.26×15.94	5.02	C13	—	—	600
		—	TO-247AD	(TO-247N)	—	41×16	5	C11	Tube	—	450

Notice

- 1) The information contained in this document is intended to introduce ROHM Group (hereafter referred to as ROHM) products. When using ROHM products, please verify the latest specifications or datasheets before use.
- 2) ROHM products are designed and manufactured for use in general electronic equipment and applications (such as Audio Visual equipment, Office Automation equipment, telecommunication equipment, home appliances, amusement devices, etc.) or specified in the datasheets. Therefore, please contact the ROHM sales representative before using ROHM products in equipment or devices requiring extremely high reliability and whose failure or malfunction may cause danger or injury to human life or body or other serious damage (such as medical equipment, transportation, traffic, aircraft, spacecraft, nuclear power controllers, fuel control, automotive equipment including car accessories, etc. hereafter referred to as Specific Applications). Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties arising from the use of ROHM Products for Specific Applications.
- 3) Electronic components, including semiconductors, can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against physical injury, and damage to any property, which a failure or malfunction of products may cause.
- 4) The information contained in this document, including application circuit examples and their constants, is intended to explain the standard operation and usage of ROHM products, and is not intended to guarantee, either explicitly or implicitly, the operation of the product in the actual equipment it will be used. As a result, you are solely responsible for it, and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties arising from the use of such information.
- 5) When exporting ROHM products or technologies described in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, such as the Foreign Exchange and Foreign Trade Act and the US Export Administration Regulations, and follow the necessary procedures in accordance with these provisions.
- 6) The technical information and data described in this document, including typical application circuits, are examples only and are not intended to guarantee to be free from infringement of third parties intellectual property or other rights. ROHM does not grant any license, express or implied, to implement, use, or exploit any intellectual property or other rights owned or controlled by ROHM or any third parties with respect to the information contained herein.
- 7) No part of this document may be reprinted or reproduced in any form by any means without the prior written consent of ROHM.
- 8) All information contained in this document is current as of the date of publication and subject to change without notice. Before purchasing or using ROHM products, please confirm the latest information with the ROHM sales representative.
- 9) ROHM does not warrant that the information contained herein is error-free. ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties resulting from errors contained in this document.
- 10) The information contained in this document is current as of December 1st, 2023.

[Compliance to RoHS Directive]

All of the products comply with the RoHS Directive.
With the exception of specific exemptions granted under the RoHS Directive and naturally occurring impurities, the products conform to control limits on the six substances regulated by the RoHS Directive (lead, cadmium, mercury, hexavalent chromium, PBB, and PBDE). Indicates that the product's terminals and electrodes contain no lead. The products internal components other than those specifically exempted under the RoHS Directive. It should not be construed as guarantee of compliance with laws and regulations enacted by EU member states in response to the RoHS Directive.