

DC/DC Converter

Application Information

| | |
|-----------------|--------------------------------------|
| IC Product Name | BD9G401EFJ-M |
| Topology | Buck (Step-Down) Switching Regulator |
| Type | Non-Isolation |

| No | VIN[V] | Output | Frequency[kHz] | Conditions |
|----|----------|-----------|----------------|----------------------------|
| 1 | 10 to 42 | 5V, 3.5A | 300 | |
| 2 | 12 to 42 | 8V, 3.5A | 300 | |
| 3 | 16 to 42 | 12V, 3.5A | 300 | |
| 4 | 32 to 42 | 24V, 3.5A | 300 | CO _{UT} =47μF x 2 |
| 5 | 32 to 42 | 24V, 3.5A | 300 | CO _{UT} =22μF x 5 |
| 6 | 32 to 42 | 24V, 3.5A | 300 | CO _{UT} =100μF |

Typical Application Circuit

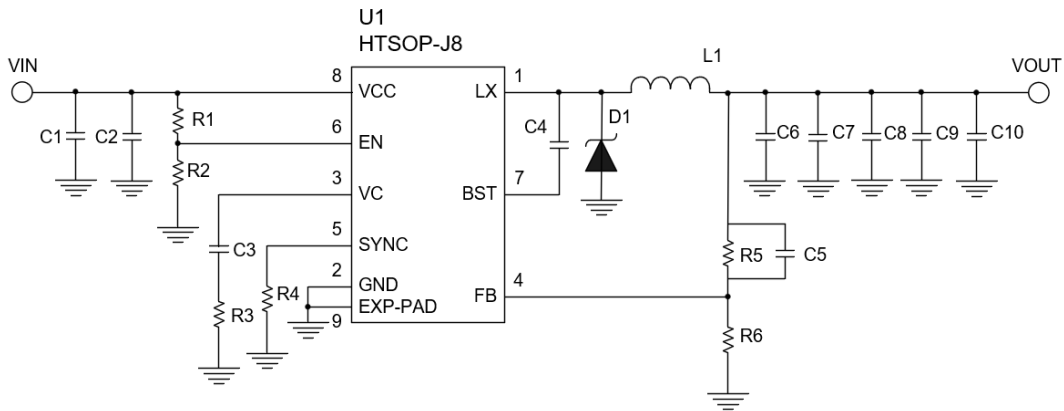


Figure 1. Schematic

EN pin setting (6-pin)

Table 1. EN pin setting and IC operation

| Pin state | IC operation |
|-------------|---------------------------|
| $\geq 1.8V$ | Normal operation |
| $\leq 1.4V$ | Internal REG is turned on |
| $\leq 0.3V$ | Power down |

UVLO detect voltage setting with EN pin external resistor

$$R1 = \frac{V_{\text{start}} - V_{\text{stop}}}{I_{\text{EN}}} \quad [\Omega]$$

$$R2 = \frac{V_{\text{EN}} \times R1}{V_{\text{start}} - V_{\text{EN}}} \quad [\Omega]$$

I_{EN} : EN pin source current 10 μ A (Typ)

V_{EN} : EN pin output on threshold 1.8V (Typ)

V_{start} : Desired UVLO release voltage

V_{stop} : Desired UVLO detect voltage.

Soft Start with External CLK

The SYNC pin can be used to synchronize the regulator to an external system clock(250kHz to 500kHz). Soft start time with external clock is calculated as below.

$$T_{\text{soft}} = \frac{300}{f_{\text{osc_ex}}} \times 8 \quad [\text{ms}]$$

Where:

T_{soft} is the softstart time [ms];

$f_{\text{osc_ex}}$ is the external clock [kHz]

Inductor

Shielded type that meets the current rating (current value from the Ipeak below), with low DCR (Direct Current Resistance element) is recommended.

$$I_{peak} = I_{OUT} + \frac{\Delta IL}{2} [A]$$

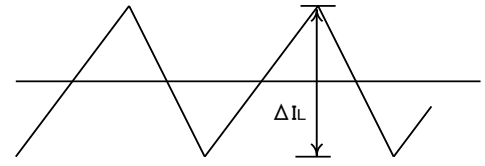


Figure 2. Inductor ripple Current

The value of inductor has an effect in the inductor ripple current which causes the output ripple. In the same formula below, this ripple current can be made small with a large value L of the coil or as high as the switching frequency.

$$\Delta IL = \frac{VIN - VOUT}{L} \times \frac{VOUT}{VIN} \times \frac{1}{f} [A]$$

Where:

- Δ IL is the Inductor ripple current;
- f is switching frequency.

For design value of inductor ripple current, please carry out design tentatively with about 20% to 50% of the maximum output current of the IC. The minimum value of inductance is shown in the following figure. Inductor is selected over the value of the graph.

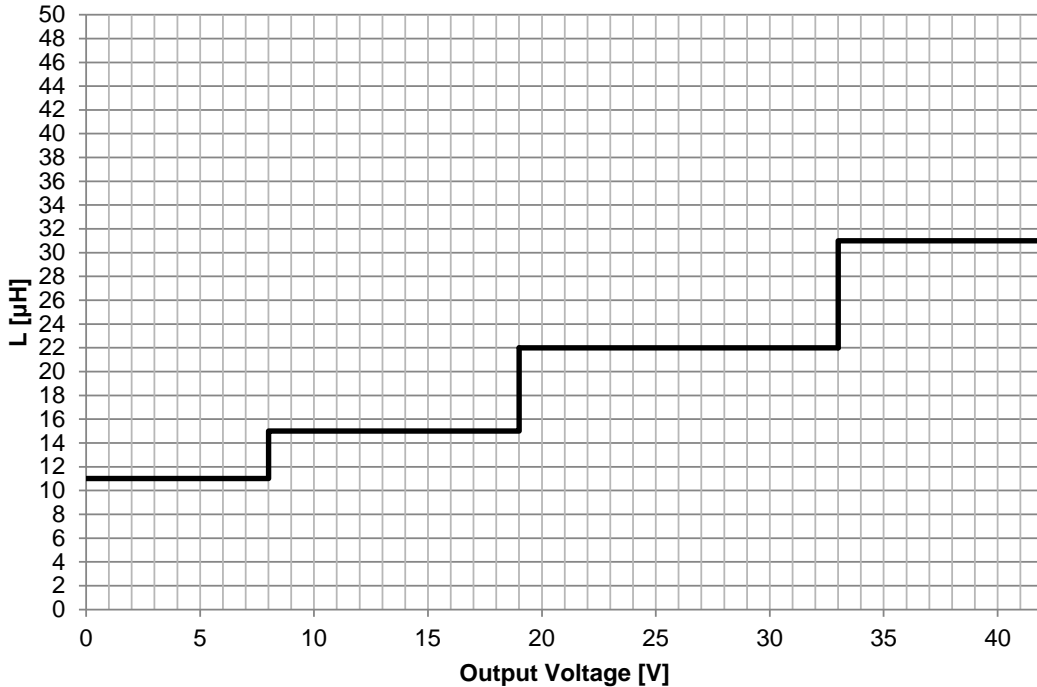


Figure 3. Output Voltage vs inductance(min)

When current that exceeds the rating of inductor flows into the inductor, the inductor causes a magnetic saturation which in turn causes a decline in efficiency and output oscillation. Please choose an inductor with a sufficient margin so that peak current does not exceed rating current of the inductor.

Input Capacitor

This IC needs an input decoupling capacitor. It is recommended a low ESR ceramic capacitor over 2.2μF.

The capacitance is selected considering temperature characteristics and bias voltage effect.

The input ripple voltage is determined by input capacitance C_{IN} (C1 and C2 in p.2 Figure 1). Because the IC input voltage is decreased, consider input voltage range including ripple voltage. The input ripple voltage is estimated by the following.

$$\Delta V_{in} = \frac{I_{OUT(\max)} \times V_{OUT}}{C_{IN} \times f \times V_{IN}} + (I_{OUT(\max)} \times RESR_{(\max)}) [V_{p-p}]$$

RESR is ESR of input capacitor

Note that frequency decreases by 1/8 times in MaxDuty mode when the differential voltage between input and output is small. Refer to Detailed Description in the datasheet for the condition of MaxDuty mode.

Select a capacitor that has sufficient capacitance value to meet the recommended operating range with its input ripple voltage.

Please confirm the characteristic of RMS ripple current – temperature.

RMS ripple current (I_{RMS}) is following.

$$I_{RMS} \approx I_{OUT} \times \sqrt{\frac{V_{OUT}}{V_{IN}} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right)} [A_{RMS}]$$

I_{RMS} has a maximum value when $V_{IN} = 2 \times V_{OUT}$

$$I_{RMS} \approx \frac{I_{OUT}}{2} [A_{RMS}]$$

Choose an input capacitor that has enough temperature margin at the I_{RMS} .

Output Capacitor

In order to reduce output ripple, a ceramic capacitor of low ESR is recommended. Also, for capacitor rating, take into consideration the DC bias characteristics. Use a capacitor with maximum rating of sufficient margin with respect to the output voltage.

Output ripple voltage V_{pp} is obtained through the following formula. While C_{OUT} is $C6+C7+C8+C9+C10$ in p.2 Figure 1.

$$V_{pp} = \Delta IL \times \left[\frac{1}{2\pi \times f \times C_{OUT}} + R_{ESR} \right] \text{ [V]}$$

R_{ESR} is ESR of output capacitor

Please set the value within allowable ripple voltage.

Confirm rush current (I_{rush}) of the startup because the output capacitance has an effect of I_{rush} .

I_{rush} is estimated in the following.

$$I_{rush} = \frac{C_{OUT} \times V_{OUT} \times f_{osc_ex}}{T_{softstart} \times f_{osc}} + \Delta IL + I_{OUT_start} \text{ [A]}$$

Where:

$T_{softstart}$ is soft start time;

f_{osc} is inner frequency, 300 kHz;

f_{osc_ex} is SYNC frequency (If the SYNC function is not used, f_{osc_ex} equals to f_{osc});

I_{OUT_start} is output current when IC is start up.

At least, It is required that I_{rush} is less than 4A that is minimum value of OCP threshold.

Output Voltage Setting

The reference voltage of internal ERROR AMP is 0.8V. Output voltage is determined by the equation below.

$$VOUT = \frac{R_5 + R_6}{R_6} \times 0.8 \text{ [V]}$$

Operating Duty Don is calculated by the following equation with input and output voltage and load current.

$$D_{on} = \frac{VOUT}{VCC - R_{onH} \times IOUT} \times 100 \text{ [%]}$$

Thus, the available minimum output voltage is restricted by minimum duty shown as the following.

$$D_{on_min} = (f_{osc} \times T_{on_min}) \times 100 \text{ [%]}$$

Where:

D_{on_min} is minimum duty;

f_{osc} is operating frequency;

T_{on_min} is minimum on time, 200ns.

And the available maximum output voltage is restricted by maximum duty shown as the following.

$$D_{on_max} = [1 - (f_{osc} \times T_{off_f})] \times 100 \text{ [%]}$$

Where:

D_{on_max} is maximum duty;

f_{osc} is operating frequency ;

T_{off_f} is forced-off time, 300ns.

Bill of Materials

1. VOUT=5V, Io=3.5A, (VIN=10V to 42V), fosc=300kHz

Table 2. Bill of Materials 1

| Quantity | Reference Designator | Part Number | Manufacturer | Value | Description [Unit: inch(mm)] |
|------------------|----------------------|--------------------|--------------|--------|---|
| IC | | | | | |
| 1 | U1 | BD9G401EFJ-M | Rohm | - | Buck DC/DC |
| Capacitor | | | | | |
| 1 | C1 | GCM32EC71H106KA03 | Murata | 10μF | Ceramic Capacitor, 50V, X7S, ±10%, 1210(3225) |
| 1 | C2 | GCM155R71H104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C3 | GCM155R71H102KA37 | Murata | 1000pF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C4 | GCM155R71E104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C5 | GCM1555C1H180JA16 | Murata | 18pF | Ceramic Capacitor, 50V, X7R, ±5%, 0402(1005) |
| 1 | C6 | GCM32EC71A476KE02 | Murata | 47μF | Ceramic Capacitor, 10V, X7S, ±10%, 1210(3225) |
| 1 | C7 | GCM32EC71A476KE02 | Murata | 47μF | Ceramic Capacitor, 10V, X7S, ±10%, 1210(3225) |
| 1 | C8 | - | - | - | Open |
| 1 | C9 | - | - | - | Open |
| 1 | C10 | - | - | - | Open |
| Resistor | | | | | |
| 1 | R1 | MCR03EZPD1103 | Rohm | 110kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R2 | MCR03EZPD4302 | Rohm | 43kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R3 | MCR03EZPFX1502 | Rohm | 15kΩ | Resistor, 50V, 0.1W, ±1%, 0603(1608) |
| 1 | R4 | - | - | - | Open |
| 1 | R5 | MCR03EZPD4303 | Rohm | 430kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R6 | MCR03EZPD8202 | Rohm | 82kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| Diode | | | | | |
| 1 | D1 | RBR5LAM60ATF | Rohm | - | Diode, 60V, 5A, 1910(4725) |
| Inductor | | | | | |
| 1 | L1 | CLF12577NIT-220M-D | TDK | 22μH | Inductor, 4.3A max, ±20%, 4949(12.8 x 12.5) |

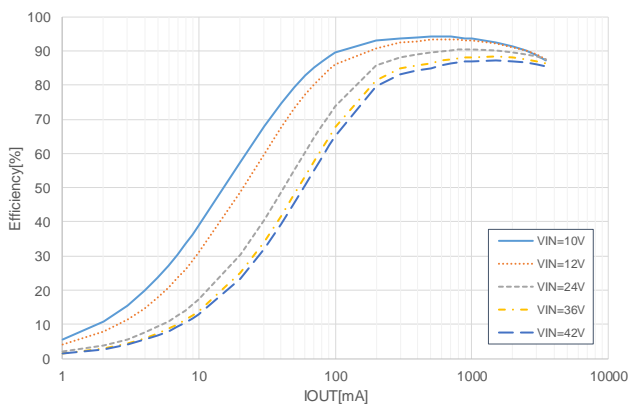


Figure 4. Efficiency vs Load Current (BOM1, VOUT=5V)

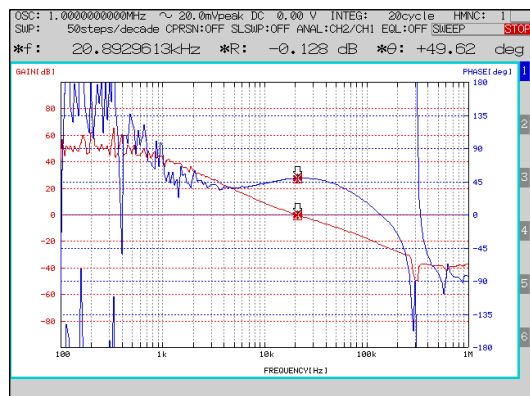


Figure 5. Frequency characteristics (BOM1, VIN=12V, IOUT=3.5A)

Bill of Materials(continued)

2. VOUT=8V, Io=3.5A, (VIN=12V to 42V), fosc=300kHz

Table 3. Bill of Materials 2

| Quantity | Reference Designator | Part Number | Manufacturer | Value | Description [Unit: inch(mm)] |
|------------------|----------------------|--------------------|--------------|--------|---|
| IC | | | | | |
| 1 | U1 | BD9G401EFJ-M | Rohm | - | Buck DC/DC |
| Capacitor | | | | | |
| 1 | C1 | GCM32EC71H106KA03 | Murata | 10μF | Ceramic Capacitor, 50V, X7S, ±10%, 1210(3225) |
| 1 | C2 | GCM155R71H104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C3 | GCM155R71H102KA37 | Murata | 1000pF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C4 | GCM155R71E104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C5 | GCM1555C1H470JA16 | Murata | 47pF | Ceramic Capacitor, 50V, X7R, ±5%, 0402(1005) |
| 1 | C6 | KCM55WR71E476MH01 | Murata | 47μF | Ceramic Capacitor, 25V, X7R, ±20%, 2421(6153) |
| 1 | C7 | KCM55WR71E476MH01 | Murata | 47μF | Ceramic Capacitor, 25V, X7R, ±20%, 2421(6153) |
| 1 | C8 | - | - | - | Open |
| 1 | C9 | - | - | - | Open |
| 1 | C10 | - | - | - | Open |
| Resistor | | | | | |
| 1 | R1 | MCR03EZPD1103 | Rohm | 110kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R2 | MCR03EZPD4302 | Rohm | 43kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R3 | MCR03EZPFX1602 | Rohm | 16kΩ | Resistor, 50V, 0.1W, ±1%, 0603(1608) |
| 1 | R4 | - | - | - | Open |
| 1 | R5 | MCR03EZPD5603 | Rohm | 560kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R6 | MCR03EZPD6202 | Rohm | 62kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| Diode | | | | | |
| 1 | D1 | RBR5LAM60ATF | Rohm | - | Diode, 60V, 5A, 1910(4725) |
| Inductor | | | | | |
| 1 | L1 | CLF12577NIT-220M-D | TDK | 22μH | Inductor, 4.3A max, ±20%, 4949(12.8 x 12.5) |

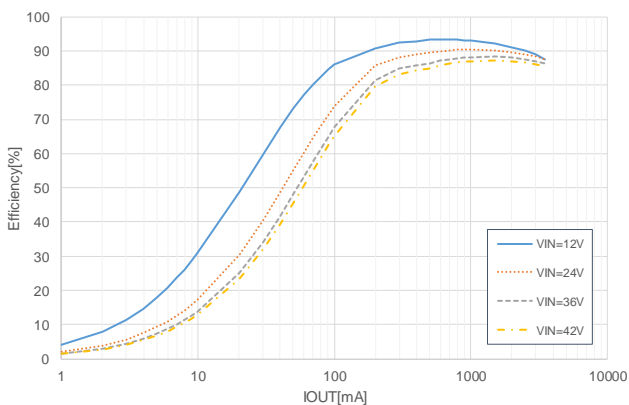


Figure 6. Efficiency vs Load Current (BOM2, VOUT=8V)

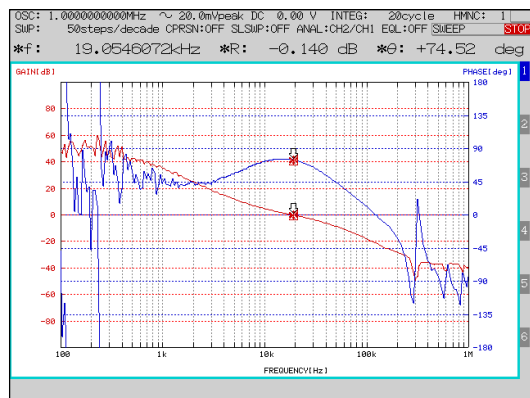


Figure 7. Frequency Characteristics (BOM2, VIN=12V, IOUT=3.5A)

Bill of Materials(continued)

3. VOUT=12V, Io=3.5A, (VIN=16V to 42V), fosc=300kHz

Table 4. Bill of Materials 3

| Quantity | Reference Designator | Part Number | Manufacturer | Value | Description [Unit: inch(mm)] |
|------------------|----------------------|-------------------|--------------|--------|---|
| IC | | | | | |
| 1 | U1 | BD9G401EFJ-M | Rohm | - | Buck DC/DC |
| Capacitor | | | | | |
| 1 | C1 | GCM32EC71H106KA03 | Murata | 10μF | Ceramic Capacitor, 50V, X7S, ±10%, 1210(3225) |
| 1 | C2 | GCM155R71H104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C3 | GCM155R71H102KA37 | Murata | 1000pF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C4 | GCM155R71E104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C5 | GCM1555C1H330JA16 | Murata | 33pF | Ceramic Capacitor, 50V, X7R, ±5%, 0402(1005) |
| 1 | C6 | KCM55WR71E476MH01 | Murata | 47μF | Ceramic Capacitor, 25V, X7R, ±20%, 2421(6153) |
| 1 | C7 | KCM55WR71E476MH01 | Murata | 47μF | Ceramic Capacitor, 25V, X7R, ±20%, 2421(6153) |
| 1 | C8 | - | - | - | Open |
| 1 | C9 | - | - | - | Open |
| 1 | C10 | - | - | - | Open |
| Resistor | | | | | |
| 1 | R1 | MCR03EZPD1103 | Rohm | 110kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R2 | MCR03EZPD4302 | Rohm | 43kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R3 | MCR03EZPFX2402 | Rohm | 24kΩ | Resistor, 50V, 0.1W, ±1%, 0603(1608) |
| 1 | R4 | - | - | - | Open |
| 1 | R5 | MCR03EZPD5103 | Rohm | 510kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R6 | MCR03EZPD3602 | Rohm | 36kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| Diode | | | | | |
| 1 | D1 | RBR5LAM60ATF | Rohm | - | Diode, 60V, 5A, 1910(4725) |
| Inductor | | | | | |
| 1 | L1 | CLF12577NT-220M-D | TDK | 22μH | Inductor, 4.3A max, ±20%, 4949(12.8 x 12.5) |

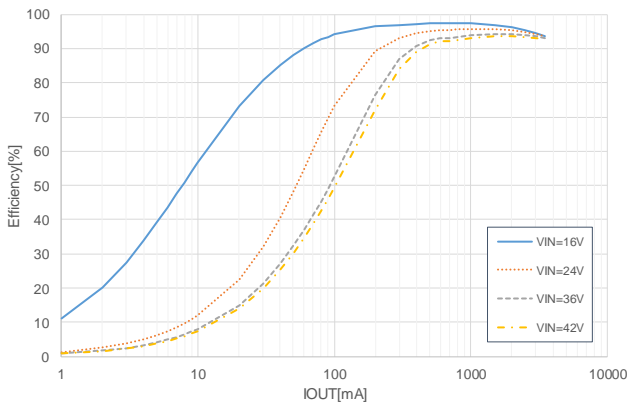


Figure 8. Efficiency vs Load Current (BOM3, VOUT=12V)

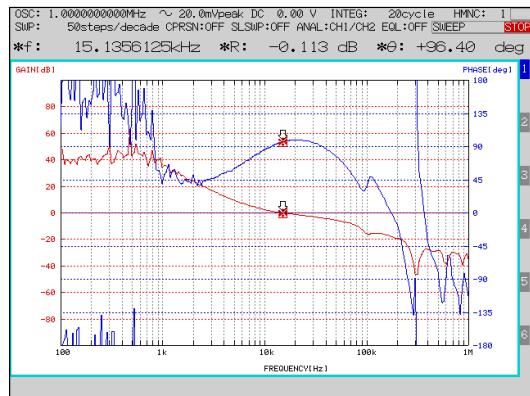


Figure 9. Frequency characteristics (BOM3, VIN=24V, IOUT=3.5A)

Bill of Materials(continued)

4. VOUT=24V, Io=3.5A, (VIN=32V to 42V), fosc=300kHz

Table 5. Bill of Materials 4

| Quantity | Reference Designator | Part Number | Manufacturer | Value | Description [Unit: inch(mm)] |
|------------------|----------------------|--------------------|--------------|--------|---|
| IC | | | | | |
| 1 | U1 | BD9G401EFJ-M | Rohm | - | Buck DC/DC |
| Capacitor | | | | | |
| 1 | C1 | GCM32EC71H106KA03 | Murata | 10μF | Ceramic Capacitor, 50V, X7S, ±10%, 1210(3225) |
| 1 | C2 | GCM155R71H104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C3 | GCM155R71H102KA37 | Murata | 1000pF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C4 | GCM155R71E104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C5 | GCM1555C1H680JA16 | Murata | 68pF | Ceramic Capacitor, 50V, X7R, ±5%, 0402(1005) |
| 1 | C6 | KCM55WR7YA476MH01 | Murata | 47μF | Ceramic Capacitor, 35V, X7R, ±20%, 2421(6153) |
| 1 | C7 | KCM55WR7YA476MH01 | Murata | 47μF | Ceramic Capacitor, 35V, X7R, ±20%, 2421(6153) |
| 1 | C8 | - | - | - | Open |
| 1 | C9 | - | - | - | Open |
| 1 | C10 | - | - | - | Open |
| Resistor | | | | | |
| 1 | R1 | MCR03EZPD1103 | Rohm | 110kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R2 | MCR03EZPD4302 | Rohm | 43kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R3 | MCR03EZPFX2402 | Rohm | 24kΩ | Resistor, 50V, 0.1W, ±1%, 0603(1608) |
| 1 | R4 | - | - | - | Open |
| 1 | R5 | MCR03EZPD4703 | Rohm | 470kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R6 | MCR03EZPD1602 | Rohm | 16kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| Diode | | | | | |
| 1 | D1 | RBR5LAM60ATF | Rohm | - | Diode, 60V, 5A, 1910(4725) |
| Inductor | | | | | |
| 1 | L1 | CLF12577NIT-220M-D | TDK | 22μH | Inductor, 4.3A max, ±20%, 4949(12.8 x 12.5) |

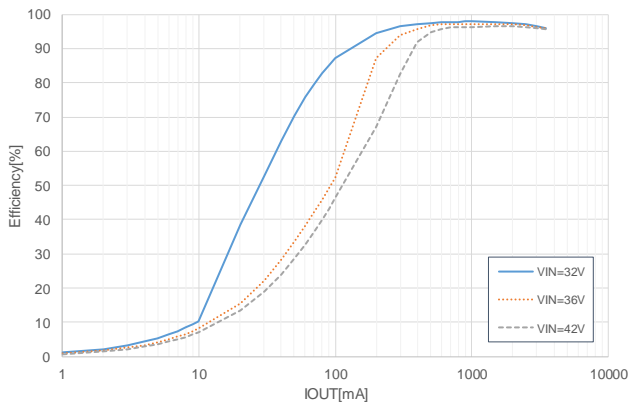


Figure 10. Efficiency vs Load Current (BOM4, VOUT=24V)

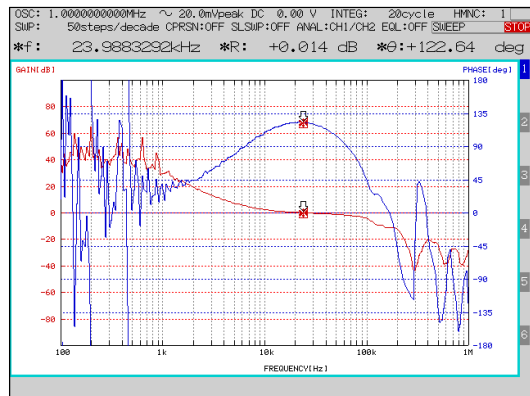


Figure 11. Frequency characteristics (BOM4, VIN=36V, IOUT=3.5A)

Bill of Materials(continued)

5. VOUT=24V, Io=3.5A, (VIN=32V to 42V), fosc=300kHz

Table 6. Bill of Materials 5

| Quantity | Reference Designator | Part Number | Manufacturer | Value | Description [Unit: inch(mm)] |
|------------------|----------------------|--------------------|--------------|--------|---|
| IC | | | | | |
| 1 | U1 | BD9G401EFJ-M | Rohm | - | Buck DC/DC |
| Capacitor | | | | | |
| 1 | C1 | GCM32EC71H106KA03 | Murata | 10μF | Ceramic Capacitor, 50V, X7S, ±10%, 1210(3225) |
| 1 | C2 | GCM155R71H104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C3 | GCM155R71H102KA37 | Murata | 1000pF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C4 | GCM155R71E104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C5 | GCM1555C1H820JA16 | Murata | 82pF | Ceramic Capacitor, 50V, X7R, ±5%, 0402(1005) |
| 1 | C6 | KCM55QE7YA226KH01 | Murata | 22μF | Ceramic Capacitor, 35V, X7R, ±20%, 2421(6153) |
| 1 | C7 | KCM55QE7YA226KH01 | Murata | 22μF | Ceramic Capacitor, 35V, X7R, ±20%, 2421(6153) |
| 1 | C8 | KCM55QE7YA226KH01 | Murata | 22μF | Ceramic Capacitor, 35V, X7R, ±20%, 2421(6153) |
| 1 | C9 | KCM55QE7YA226KH01 | Murata | 22μF | Ceramic Capacitor, 35V, X7R, ±20%, 2421(6153) |
| 1 | C10 | KCM55QE7YA226KH01 | Murata | 22μF | Ceramic Capacitor, 35V, X7R, ±20%, 2421(6153) |
| Resistor | | | | | |
| 1 | R1 | MCR03EZPD1103 | Rohm | 110kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R2 | MCR03EZPD4302 | Rohm | 43kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R3 | MCR03EZPFX2402 | Rohm | 24kΩ | Resistor, 50V, 0.1W, ±1%, 0603(1608) |
| 1 | R4 | - | - | - | Open |
| 1 | R5 | MCR03EZPD4703 | Rohm | 470kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R6 | MCR03EZPD1602 | Rohm | 16kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| Diode | | | | | |
| 1 | D1 | RBR5LAM60ATF | Rohm | - | Diode, 60V, 5A, 1910(4725) |
| Inductor | | | | | |
| 1 | L1 | CLF12577NIT-220M-D | TDK | 22μH | Inductor, 4.3A max, ±20%, 4949(12.8 x 12.5) |

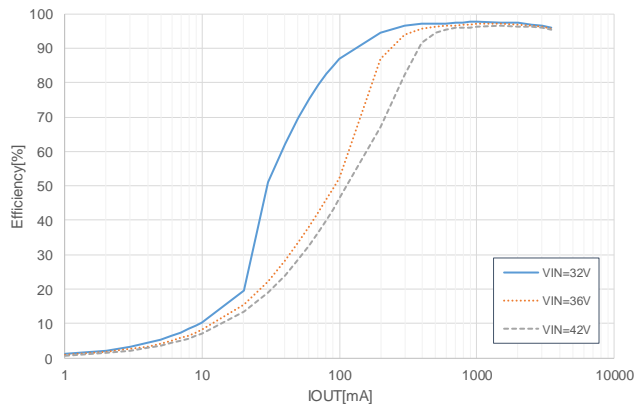


Figure 12. Efficiency vs Load Current (BOM5, VOUT=24V)

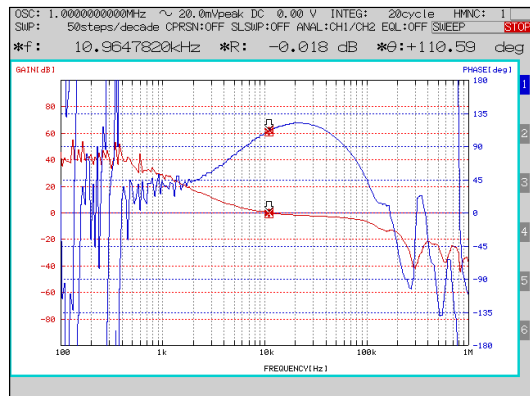


Figure 13. Frequency characteristic (BOM5, VIN=36V, IOUT=3.5A)

Bill of Materials(continued)

6. VOUT=24V, Io=3.5A, (VIN=32V to 42V), fosc=300kHz

Table 7. Bill of Materials 6

| Quantity | Reference Designator | Part Number | Manufacturer | Value | Description [Unit: inch(mm)] |
|------------------|----------------------|--------------------|--------------|--------|---|
| IC | | | | | |
| 1 | U1 | BD9G401EFJ-M | Rohm | - | Buck DC/DC |
| Capacitor | | | | | |
| 1 | C1 | GCM32EC71H106KA03 | Murata | 10μF | Ceramic Capacitor, 50V, X7S, ±10%, 1210(3225) |
| 1 | C2 | GCM155R71H104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C3 | GCM155R71H102KA37 | Murata | 1000pF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C4 | GCM155R71E104KE02 | Murata | 0.1μF | Ceramic Capacitor, 50V, X7R, ±10%, 0402(1005) |
| 1 | C5 | GCM155C1H121JA16 | Murata | 120pF | Ceramic Capacitor, 50V, X7R, ±5%, 0402(1005) |
| 1 | C6 | PCV1V101MCL1GS | Nichicon | 100μF | Aluminum Electrolytic Capacitor, 35V, ±20%, ±20%, 4141(10.3 x 10.3) |
| 1 | C7 | - | - | - | - |
| 1 | C8 | - | - | - | - |
| 1 | C9 | - | - | - | - |
| 1 | C10 | - | - | - | - |
| Resistor | | | | | |
| 1 | R1 | MCR03EZPD1103 | Rohm | 110kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R2 | MCR03EZPD4302 | Rohm | 43kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R3 | MCR03EZPFX2402 | Rohm | 24kΩ | Resistor, 50V, 0.1W, ±1%, 0603(1608) |
| 1 | R4 | - | - | - | Open |
| 1 | R5 | MCR03EZPD4703 | Rohm | 470kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| 1 | R6 | MCR03EZPD1602 | Rohm | 16kΩ | Resistor, 50V, 0.1W, ±0.5%, 0603(1608) |
| Diode | | | | | |
| 1 | D1 | RBR5LAM60ATF | Rohm | - | Diode, 60V, 5A, 1910(4725) |
| Inductor | | | | | |
| 1 | L1 | CLF12577NIT-220M-D | TDK | 22μH | Inductor, 4.3A max, ±20%, 4949(12.8 x 12.5) |

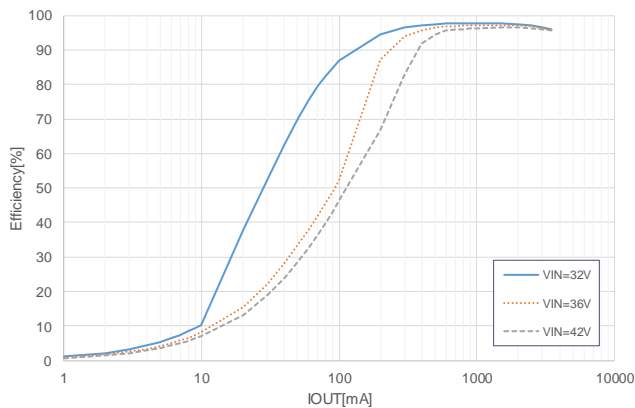


Figure 14. Efficiency vs Load Current (BOM6, VOUT=24V)

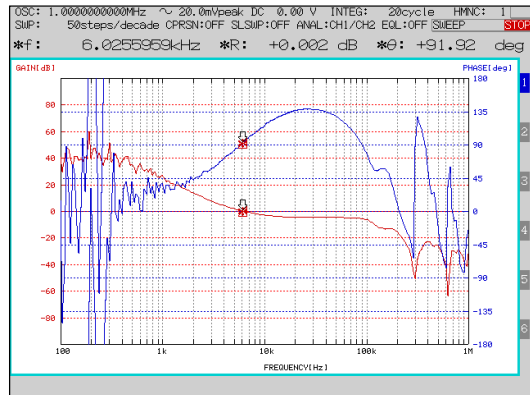


Figure 15. Frequency characteristics (BOM6, VIN=36V, IOUT=3.5A)

Revision History

| Date | Revision Number | Description |
|--------------|-----------------|-----------------|
| 1. Mar. 2021 | 001 | Initial release |

Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products specified in this document are not designed to be radiation tolerant.
- 7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 10) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>