

Primary Buck DC/DC Converter Series

Single 2.2 MHz Buck DC/DC Converter For Automotive BD9P2x5MUF-C series Evaluation Board

BD9P2x5MUF-TSB-001 (3.5V to 40V input, 2A)

Introduction

This user's guide will provide the necessary steps to operate the Evaluation Board of ROHM's BD9P2x5MUF-C Buck DC/DC converter. This includes the external parts, operating procedures and application data.

BD9P205MUF-TSB-001 VOUT=5.0V setting

BD9P235MUF-TSB-001 VOUT=3.3V fixed

BD9P255MUF-TSB-001 VOUT=5.0V fixed

Description

This Evaluation Board was developed for ROHM's single 2.2MHz buck DC/DC converter BD9P2x5MUF-C. BD9P2x5MUF-C Series are current mode synchronous buck DC/DC converter integrating POWER MOSFETs. The BD9P2x5MUF-C series accepts a power supply input range of 3.5V to 40V and generates a maximum output current of 2A.

BD9P205MUF-C generates an output voltage range of 0.8V to 8.5V using external resistors, BD9P235MUF-C generates a fixed output voltage of 3.3V, and BD9P255MUF-C generates a fixed output voltage of 5.0V.

Application

Automotive Powered Supplies

Consumer Powered Supplies

Recommended Operating Conditions

Table 1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Units	Conditions
Input Voltage	3.5	-	40	V	Initial startup is 4.0V or more
Output Voltage for BD9P205MUF-C (Note1)	0.8	-	8.5	V	
Output Voltage for BD9P235MUF-C	-	3.3	-	V	
Output Voltage for BD9P255MUF-C	-	5.5	-	V	
Output Current Range	-	-	2.0	A	OCP_SEL=H: 1.5A (Max) OCP_SEL=L: 2.0A (Max)
Switching Frequency	-	2.2	-	MHz	
Maximum Efficiency(BD9P235MUF-C)	-	86.0	-	%	VIN=12V, Io=1.0A, Ta=25°C
Maximum Efficiency(BD9P255MUF-C)	-	91.6	-	%	VIN=12V, Io=1.0A, Ta=25°C

(Note 1) Although the minimum output voltage is configurable up to 0.8 V, it may be limited by the SW min ON pulse width.

For the same reason, although the maximum output voltage is configurable up to 8.5 V, it may be limited by the SW minimum OFF pulse width.

Evaluation Board

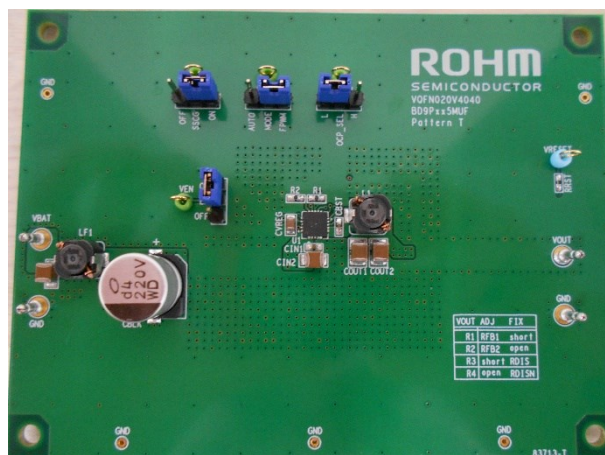


Figure 1. BD9P2x5MUF-C (Top View)

Evaluation Board Schematic

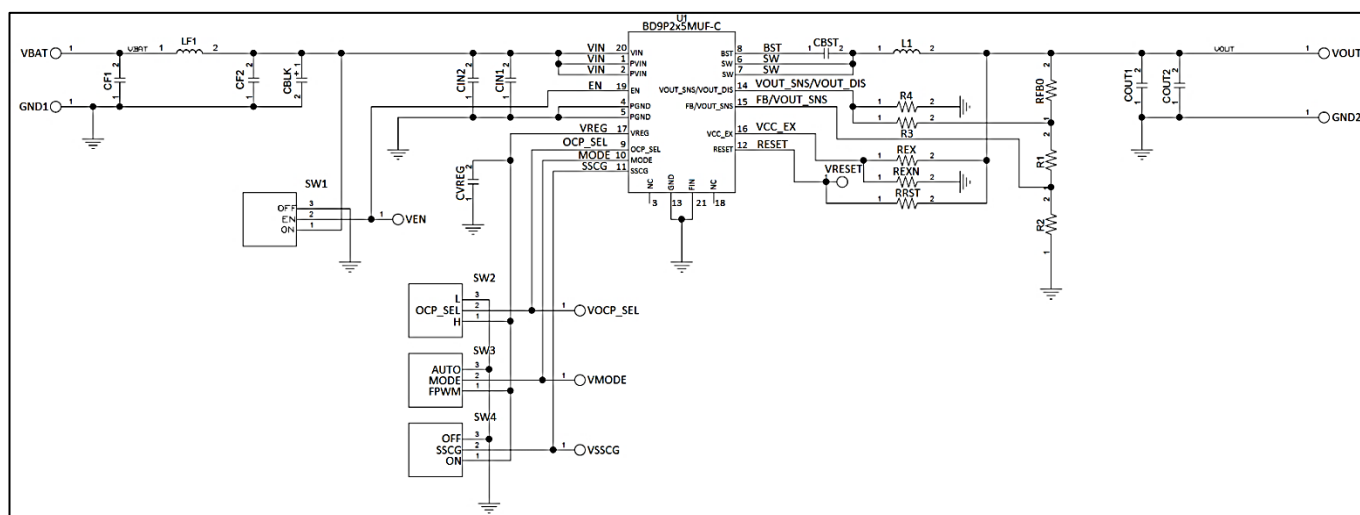


Figure 2. BD9P2x5MUF-C Circuit Diagram

Operating Procedure

1. Turn off EN and connect the GND terminal of the power supply to the GND terminal of Evaluation Board.
2. Connect VCC pin of power supply to the VBAT pin of the Evaluation Board.
3. Connect the load to the Evaluation Board's VOUT and GND terminals. When using an electronic load, connect with the load turned off.
4. Connect a voltmeter to the Evaluation Board's VOUT and GND terminals.
5. Turn on the Power supply of VBAT. Turn ON the switch of EN terminal.
6. Make sure that the voltmeter is set to measure voltage.
7. Turn on the electronic load.

(Caution) This Evaluation Board does not support hot plug. Do not perform hot plug test.

(Note) If EN=High (EN short to VIN) before Power ON, the turn ON and turn OFF is controlled by VBAT only.

Operation Mode Settings

Below is a table of BD9P2x5MUF-C operation modes selectable using OCP_SEL, MODE and SSCG terminals.

Table 2. Mode Settings

Terminal	Setting	Operation Mode	Function
OCP_SEL	HIGH	OCP threshold selection	OCP threshold is set to 2.250A (Typ.) Output Current maximum is 1.5A.
	LOW		OCP threshold is set to 3.0A (Typ.) Output Current maximum is 2.0A.
MODE	HIGH	FPWM	Forced PWM mode
	LOW or OPEN	AUTO	Automatically switched between PWM and LLM mode.
	Apply a clock to this pin	SYNC	Activate synchronization mode
SSCG	ON (HIGH)	Select Spread Spectrum function	Enable Spread Spectrum
	OFF (LOW)		Disable Spread Spectrum

(Note) If setting is High, the terminal is shorted to VREG, and if setting is Low, the terminal is shorted to GND.

Pin Configuration

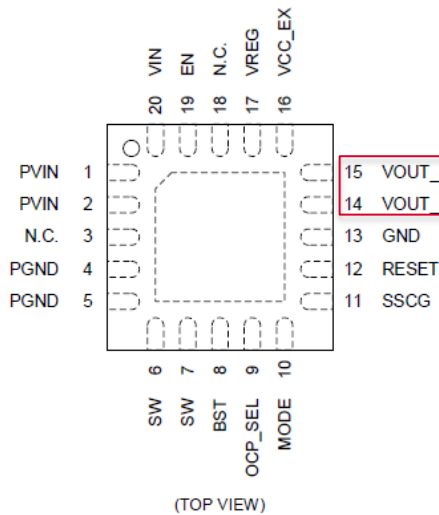


Figure 3. Pin Configuration (BD9P235MUF-C, BD9P255MUF-C)

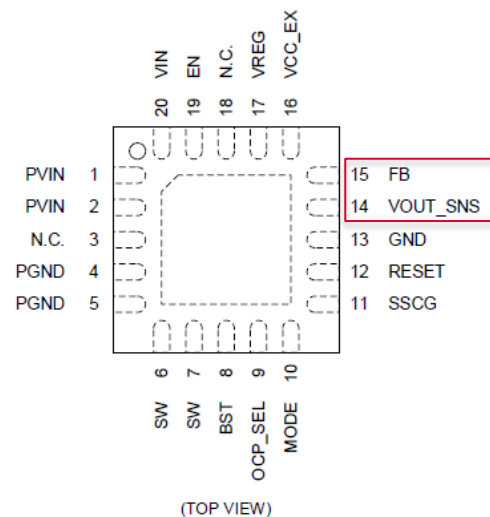


Figure 4. Pin Configuration (BD9P205MUF-C)

Pin Description of difference with BD9P235MUF-C/BD9P255MUF-C and BD9P205MUF-C

Table 3. Pin Description

Pin No.	Pin Name	function
14 (BD9P235MUF-C, BD9P255MUF-C)	VOUT_DIS	This pin discharges the VOUT node. Connect this pin to the VOUT when discharge function is required. Otherwise, connect this pin to GND.
14 (BD9P205MUF-C)	VOUT_SNS	Pin to define the clamp voltage of GmAmp2 output and phase compensation. Connect this pin to the output voltage.
15 (BD9P235MUF-C, BD9P255MUF-C)		Inverting input node of the GmAmp1. This pin is used for OVP, SCP and RESET detection. And, this pin is used for defining the clamp voltage of GmAmp2 output and phase compensation. Connect this pin to the output voltage.
15 (BD9P205MUF-C)	FB	Inverting input node of the GmAmp1. This pin is used for OVP, SCP and RESET detection. Connect output voltage divider to this pin to set the output voltage.

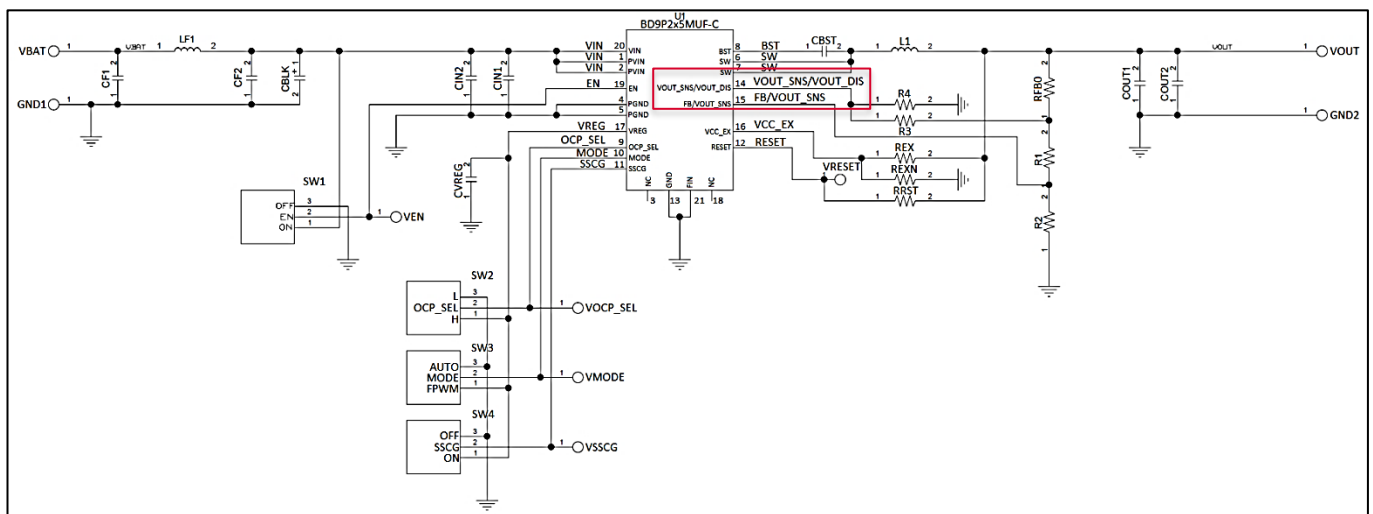


Figure 5. BD9P2x5MUF-C Circuit Diagram

Table 4. PCB Terminal Description

PCB terminal	BD9P205MUF-C	BD9P235MUF-C BD9P255MUF-C
14. VOUT_SNS / VOUT_DIS	VOUT_SNS / VOUT_DIS	VOUT_SNS / VOUT_DIS
15. FB / VOUT_SNS	FB / VOUT_SNS	FB / VOUT_SNS

Pin14 and 15 of BD9P205MUF-C and BD9P235MUF-C/BD9P255MUF-C are different terminals, but have the same layout pattern in the PCB board. Please refer to the table above for the configuration of these pin terminals for each IC.

Parts list (BD9P235MUF-C, BD9P255MUF-C)

Table 5. BD9P235MUF-C (3.3V, 2.0A) / BD9P255MUF-C (5.0V, 2.0A) Parts list

	Part No	Value	PKG(inch)	PKG(mm)	Manufacturer	Part Name(Series)
π type filter	CF1	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	LF1	2.2 μ H	2524h18	6360h45	TDK	CLF6045NIT-2R2N-D
	CF2	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CBLK	220 μ F	0404h04	1010h10	Nichicon	UWD1V221MCQ1GS
Basic	CIN2	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	CIN1	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CVREG	1 μ F	0805	2012	Murata	GCM21BR71C105K
	CBST	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	RRST	10k Ω	0603	1608	ROHM	MCR03 Series
Application	L1	3.3 μ H	2524h18	6360h45	TDK	CLF6045NIT-3R3N-D
	COUT1 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	COUT2 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	RFB0	0 Ω	0603	1608	ROHM	MCR03 Series
	R1	0 Ω	0603	1608	ROHM	MCR03 Series
	R2	Open	-	-	-	-
	R3	0 Ω	0603	1608	ROHM	MCR03 Series
	R4	Open	-	-	-	-
	REX ^(Note2)	0 Ω	0603	1608	ROHM	MCR03 Series
	REXN ^(Note2)	Open	-	-	-	-

Parts list (BD9P205MUF-C)

Table 6. BD9P205MUF-C (1.3V, 2.0A) Parts list

	Part No	Value	PKG(inch)	PKG(mm)	Manufacturer	Part Name(Series)
π type filter	CF1	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	LF1	2.2 μ H	2524h18	6360h45	TDK	CLF6045NIT-2R2N-D
	CF2	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CBLK	220 μ F	0404h04	1010h10	Nichicon	UWD1V221MCQ1GS
Basic	CIN2	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	CIN1	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CVREG	1 μ F	0805	2012	Murata	GCM21BR71C105K
	CBST	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	RRST	10k Ω	0603	1608	ROHM	MCR03 Series
Application	L1	3.3 μ H	2524h18	6360h45	TDK	CLF6045NIT-3R3N-D
	COUT1 ^(Note1)	22 μ F x3pcs	1210	3225	Murata	GCM32ER71A226K
	COUT2 ^(Note1)	22 μ F x3pcs	1210	3225	Murata	GCM32ER71A226K
	RFB0	0 Ω	0603	1608	ROHM	MCR03 Series
	R1	15k Ω	0603	1608	ROHM	MCR03 Series
	R2	24k Ω	0603	1608	ROHM	MCR03 Series
	R3	0 Ω	0603	1608	ROHM	MCR03 Series
	R4	Open	-	-	-	-
	REX ^(Note2)	Open	-	-	-	-
	REXN ^(Note2)	0 Ω	0603	1608	ROHM	MCR03 Series

Table 7. BD9P205MUF-C (3.3V, 2.0A) Parts list

	Part No	Value	PKG(inch)	PKG(mm)	Manufacturer	Part Name(Series)
π type filter	CF1	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	LF1	2.2 μ H	2524h18	6360h45	TDK	CLF6045NIT-2R2N-D
	CF2	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CBLK	220 μ F	0404h04	1010h10	Nichicon	UWD1V221MCQ1GS
Basic	CIN2	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	CIN1	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CVREG	1 μ F	0805	2012	Murata	GCM21BR71C105K
	CBST	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	RRST	10k Ω	0603	1608	ROHM	MCR03 Series
Application	L1	3.3 μ H	2524h18	6360h45	TDK	CLF6045NIT-3R3N-D
	COUT1 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	COUT2 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	RFB0	0 Ω	0603	1608	ROHM	MCR03 Series
	R1	75k Ω	0603	1608	ROHM	MCR03 Series
	R2	24k Ω	0603	1608	ROHM	MCR03 Series
	R3	0 Ω	0603	1608	ROHM	MCR03 Series
	R4	Open	-	-	-	-
	REX ^(Note2)	0 Ω	0603	1608	ROHM	MCR03 Series
	REXN ^(Note2)	Open	-	-	-	-

Table 8. BD9P205MUF-C (5.0V, 2.0A) Parts list

	Part No	Value	PKG(inch)	PKG(mm)	Manufacturer	Part Name(Series)
π type filter	CF1	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	LF1	2.2 μ H	2524h18	6360h45	TDK	CLF6045NIT-2R2N-D
	CF2	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CBLK	220 μ F	0404h04	1010h10	Nichicon	UWD1V221MCQ1GS
Basic	CIN2	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	CIN1	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CVREG	1 μ F	0805	2012	Murata	GCM21BR71C105K
	CBST	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	RRST	10k Ω	0603	1608	ROHM	MCR03 Series
Application	L1	3.3 μ H	2524h18	6360h45	TDK	CLF6045NIT-3R3N-D
	COUT1 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	COUT2 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	RFB0	0 Ω	0603	1608	ROHM	MCR03 Series
	R1	68k Ω	0603	1608	ROHM	MCR03 Series
	R2	13k Ω	0603	1608	ROHM	MCR03 Series
	R3	0 Ω	0603	1608	ROHM	MCR03 Series
	R4	Open	-	-	-	-
	REX ^(Note2)	0 Ω	0603	1608	ROHM	MCR03 Series
	REXN ^(Note2)	Open	-	-	-	-

Table 9. BD9P205MUF-C (6.0V, 2.0A) Parts list

	Part No	Value	PKG(inch)	PKG(mm)	Manufacturer	Part Name(Series)
π type filter	CF1	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	LF1	2.2 μ H	2524h18	6360h45	TDK	CLF6045NIT-2R2N-D
	CF2	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CBLK	220 μ F	0404h04	1010h10	Nichicon	UWD1V221MCQ1GS
Basic	CIN2	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	CIN1	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CVREG	1 μ F	0805	2012	Murata	GCM21BR71C105K
	CBST	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	RRST	10k Ω	0603	1608	ROHM	MCR03 Series
Application	L1	3.3 μ H	2524h18	6360h45	TDK	CLF6045NIT-3R3N-D
	COUT1 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	COUT2 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	RFB0	0 Ω	0603	1608	ROHM	MCR03 Series
	R1	130k Ω	0603	1608	ROHM	MCR03 Series
	R2	20k Ω	0603	1608	ROHM	MCR03 Series
	R3	0 Ω	0603	1608	ROHM	MCR03 Series
	R4	Open	-	-	-	-
	REX ^(Note2)	Open	-	-	-	-
	REXN ^(Note2)	0 Ω	0603	1608	ROHM	MCR03 Series

Table 10. BD9P205MUF-C (8.3V, 2.0A) Parts list

	Part No	Value	PKG(inch)	PKG(mm)	Manufacturer	Part Name(Series)
π type filter	CF1	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	LF1	2.2 μ H	2524h18	6360h45	TDK	CLF6045NIT-2R2N-D
	CF2	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CBLK	220 μ F	0404h04	1010h10	Nichicon	UWD1V221MCQ1GS
Basic	CIN2	4.7 μ F	1210	3225	Murata	GCM32ER71H475K
	CIN1	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	CVREG	1 μ F	0805	2012	Murata	GCM21BR71C105K
	CBST	0.1 μ F	0402	1005	Murata	GCM155R71H104K
	RRST	Open	-	-	-	-
Application	L1	3.3 μ H	2524h18	6360h45	TDK	CLF6045NIT-3R3N-D
	COUT1 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	COUT2 ^(Note1)	22 μ F	1210	3225	Murata	GCM32ER71A226K
	RFB0	0 Ω	0603	1608	ROHM	MCR03 Series
	R1	150k Ω	0603	1608	ROHM	MCR03 Series
	R2	16k Ω	0603	1608	ROHM	MCR03 Series
	R3	0 Ω	0603	1608	ROHM	MCR03 Series
	R4	Open	-	-	-	-
	REX ^(Note2)	Open	-	-	-	-
	REXN ^(Note2)	0 Ω	0603	1608	ROHM	MCR03 Series
	RRST2 ^(Note3)	10k Ω	0603	1608	ROHM	MCR03 Series

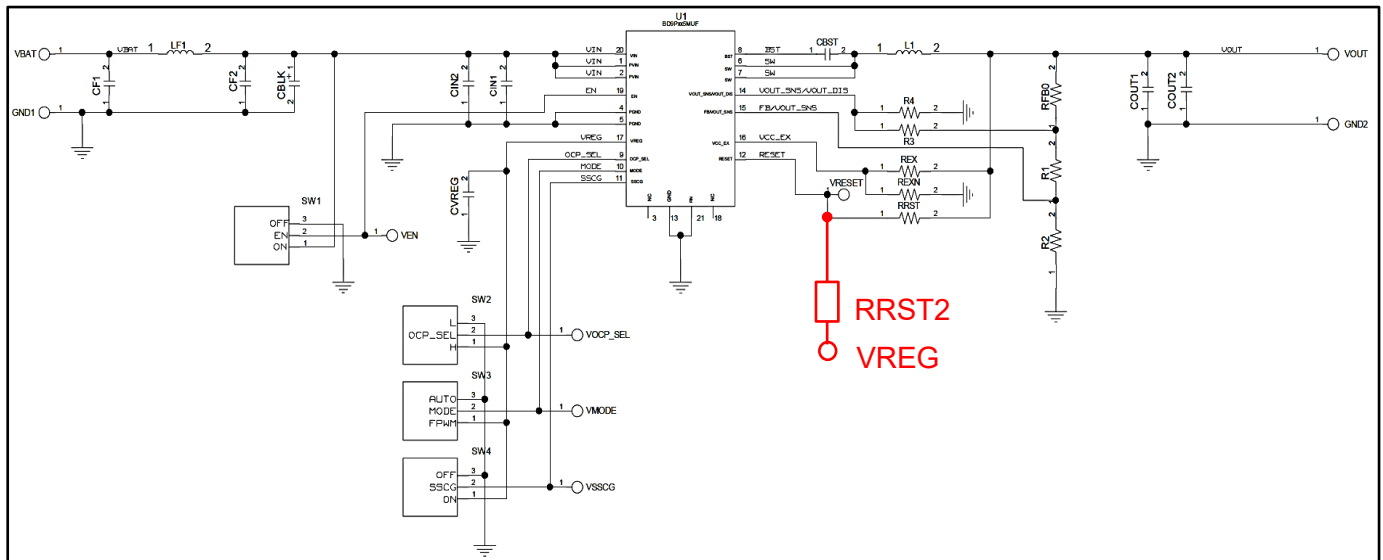


Figure 6. BD9P205MUF-C (8.3V, 2.0A) Circuit Diagram

(Note 1)

Output Voltage	Recommended COUT Value
$\geq 3.3\text{V}$	44 μF (Typ) or more
$< 3.3\text{V}$	$C_{out} \geq \frac{145.2}{V_{out}} [\mu\text{F}]$ (V_{out} is the output voltage [V])

(Note 2) VCC_EX is power supply input for internal circuit. VREG voltage is supplied from VCC_EX when voltage between 3.2 V (V_{TEXH} , Max) and 5.65 V (V_{EXOVL} , Min) is connected to this pin. Connecting this pin to VOUT improves efficiency. In case of not use this function, connect this pin to GND.

Output Voltage	REX setting	REXN setting	VCC_EX State
$3.2\text{V} \leq V_{out} \leq 5.65\text{V}$	0 Ω	Open	Connected to VOUT
$3.2\text{V} > V_{out} > 5.65\text{V}$	Open	0 Ω	Connected to GND

(Note 3) RESET terminal should be pulled-up to VREG manually using RRST2 when the output setting is over 6.5V. Because RESET pin's absolute maximum rating is 7.0V. If RESET is not pulled-up to VOUT, it can be pulled-up to VREG manually using RRST2 by default.

Since PCB doesn't have provision for RRST2 (RESET pulled-up to VREG), RRST2 has to be added manually.

Board Layout

Evaluation Board PCB information

Number of Layers	Material	Board Size	Copper Thickness
4	FR-4 HITG	100mm x 75mm x 1.6mm	2oz(70μm) / 1oz (35μm) / 1oz (35μm) / 2oz(70μm)

The layout of BD9Pxx5MUF is shown below.

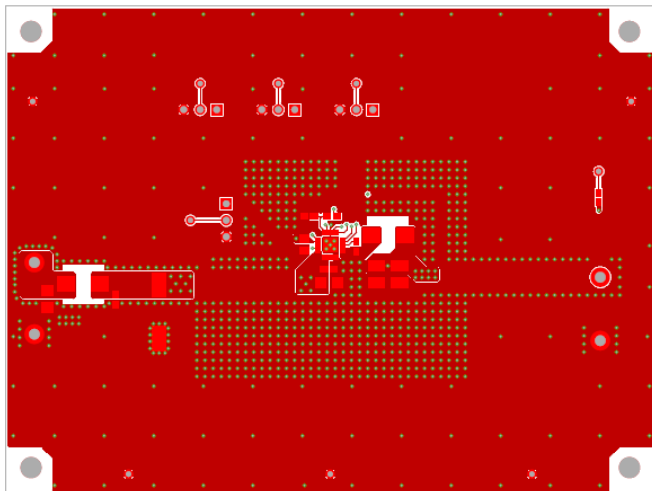


Figure 7. Top Layer Layout
(Top View)

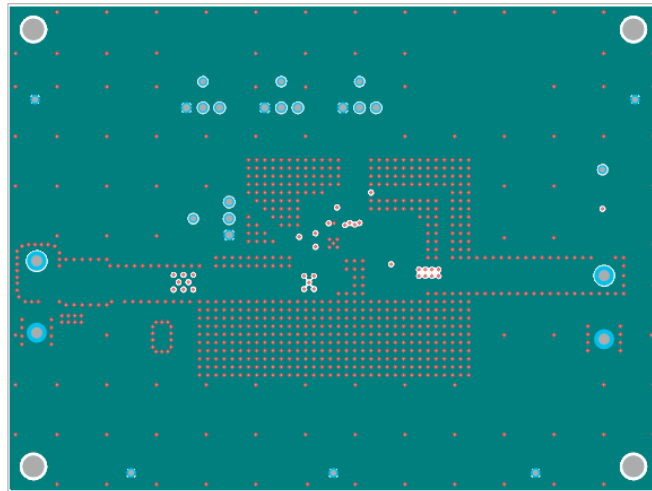


Figure 8. Middle1 Layer Layout
(Top View)

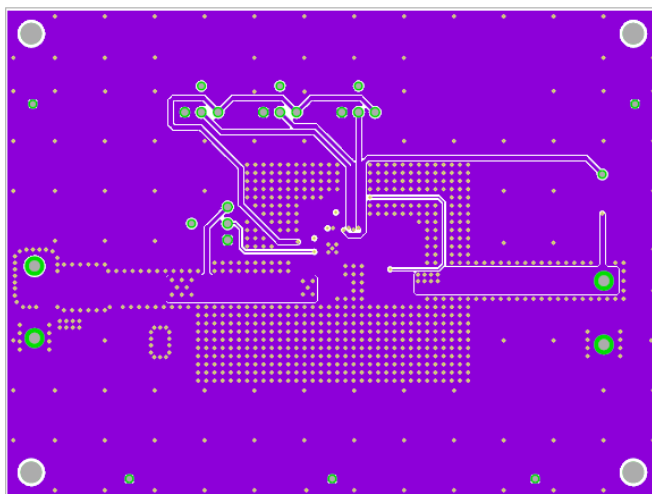


Figure 9. Middle2 Layer Layout
(Top View)

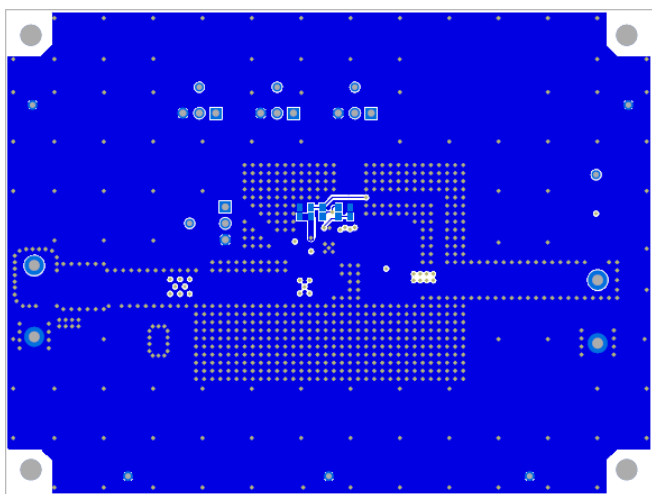


Figure 10. Bottom Layer Layout
(Top View)

Reference application data (BD9P235MUF-C)

(Ta=25°C)

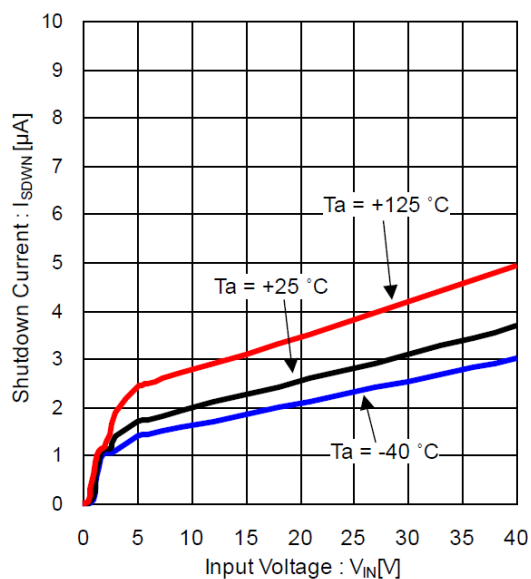


Figure 11. Shutdown Current vs Input Voltage

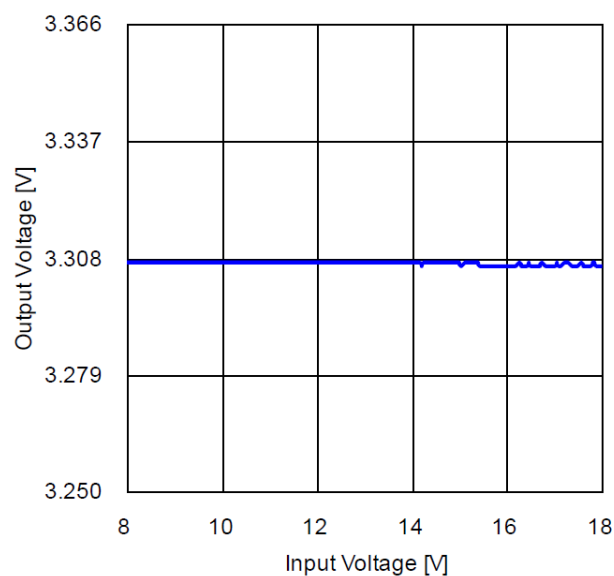


Figure 12. Line Regulation (IOUT = 2 A)

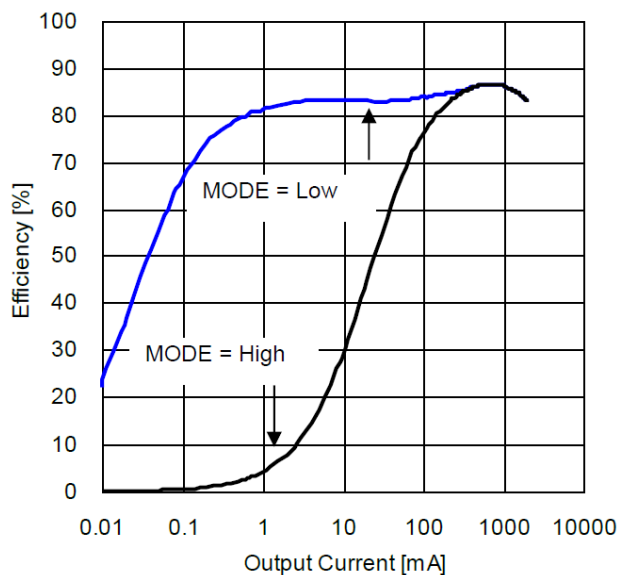


Figure 13. Efficiency vs Output Current (VIN = 12V)

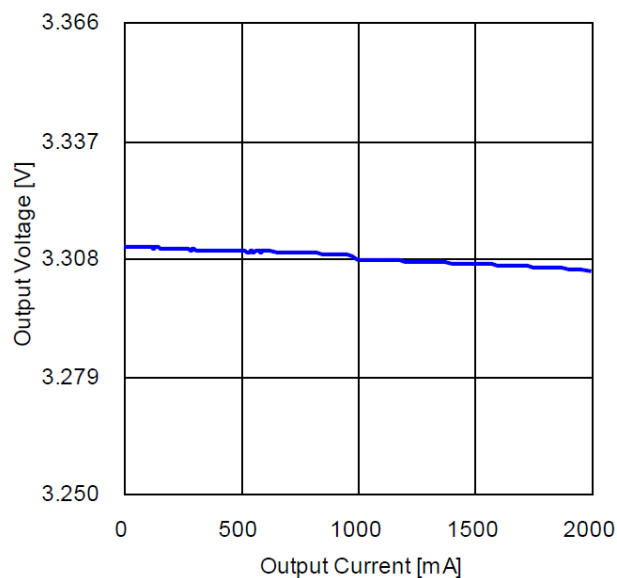


Figure 14. Load Regulation (VIN = 12 V)

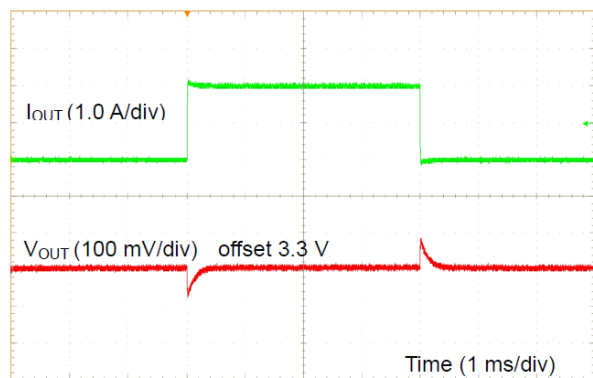


Figure 15. Load Response 1

(VIN = 12 V, VMODE = 5 V, IOUT = 0 A to 2 A)

Other series application data please refer to datasheet.

Revision History

Date	Revision Number	Description
30. Oct. 2020	001	Initial release
24. Dec. 2024	002	Add the VOUT setting value of Test Board to Introduction

Notice

- 1) The information contained in this document is intended to introduce ROHM Group (hereafter referred to as ROHM) products. When using ROHM products, please verify the latest specifications or datasheets before use.
- 2) ROHM products are designed and manufactured for use in general electronic equipment and applications (such as Audio Visual equipment, Office Automation equipment, telecommunication equipment, home appliances, amusement devices, etc.) or specified in the datasheets. Therefore, please contact the ROHM sales representative before using ROHM products in equipment or devices requiring extremely high reliability and whose failure or malfunction may cause danger or injury to human life or body or other serious damage (such as medical equipment, transportation, traffic, aircraft, spacecraft, nuclear power controllers, fuel control, automotive equipment including car accessories, etc. hereafter referred to as Specific Applications). Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties arising from the use of ROHM Products for Specific Applications.
- 3) Electronic components, including semiconductors, can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against physical injury, and damage to any property, which a failure or malfunction of products may cause.
- 4) The information contained in this document, including application circuit examples and their constants, is intended to explain the standard operation and usage of ROHM products, and is not intended to guarantee, either explicitly or implicitly, the operation of the product in the actual equipment it will be used. As a result, you are solely responsible for it, and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties arising from the use of such information.
- 5) When exporting ROHM products or technologies described in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, such as the Foreign Exchange and Foreign Trade Act and the US Export Administration Regulations, and follow the necessary procedures in accordance with these provisions.
- 6) The technical information and data described in this document, including typical application circuits, are examples only and are not intended to guarantee to be free from infringement of third parties intellectual property or other rights. ROHM does not grant any license, express or implied, to implement, use, or exploit any intellectual property or other rights owned or controlled by ROHM or any third parties with respect to the information contained herein.
- 7) No part of this document may be reprinted or reproduced in any form by any means without the prior written consent of ROHM.
- 8) All information contained in this document is current as of the date of publication and subject to change without notice. Before purchasing or using ROHM products, please confirm the latest information with the ROHM sales representative.
- 9) ROHM does not warrant that the information contained herein is error-free. ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties resulting from errors contained in this document.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<https://www.rohm.com/contactus>