

Best Selection


Electronics for the Future



Reliable supply record with shipments totaling over 60 billion pcs

Small-Signal Discrete Devices Zener Diodes (Long-Selling Products)

EDZV/UDZV series

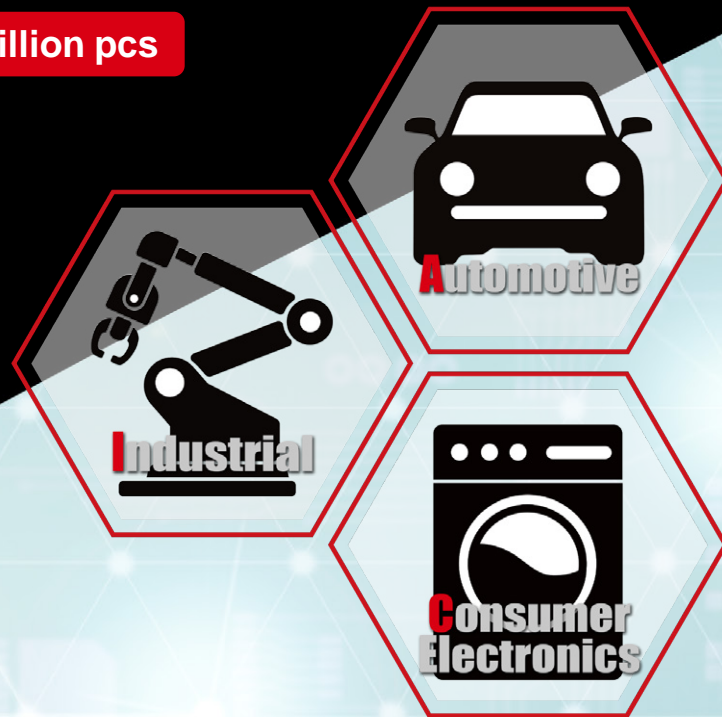

Long-Selling Small-Signal Zener Diodes: EDZV/UDZV series



Selling Points

Long-Term Supply*: 10 years


Cumulative Shipments: 33.1 billion pcs

- Extensive Vz lineup with guaranteed narrow Vz range enables high quality circuit configurations
- Excellent anti-surge current performance
- We have more than sufficient capacity

*Supply period disclosed in ROHM's Product Longevity Program (As of July 2023)

Features

ESD Resistance Data (UDZV5.6B)

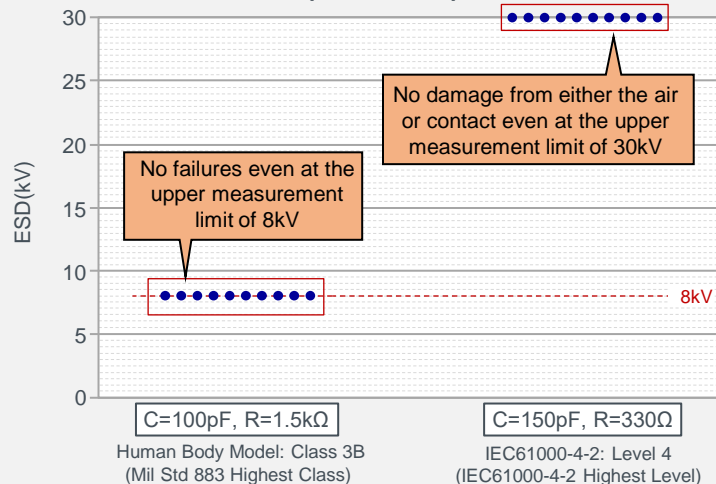

High surge withstanding in compliance with industry standards, enabling safe use in industry and automotive as well as consumer electronics

Applications

Constant voltage control

Packages

SOD-523 (EMD2)
1.6mm×0.8mm t=0.6mm

SOD-323FL (UMD2)
2.5mm×1.25mm t=0.7mm





Internal Circuit Diagram




Note: Packages in parenthesis () denotes ROHM's package type.

Long-Selling Small-Signal Zener Diodes: Specifications

■ Product Specifications: EDZV/UDZV series

Series Name	EDZV 						UDZV 					
Package [mm]	 SOD-523 (EMD2) 1.6 × 0.8, t=0.6						 SOD-323FL (UMD2) 2.5×1.25 t=0.7					
Power dissipation P _D (mW)	150						200					
Electrical Characteristics (T _a =25°C)	V _Z [V]			I _Z [mA]	Automotive Grade AEC-Q101		V _Z [V]			I _Z [mA]	Automotive Grade AEC-Q101	
Voltage Category	2.0B	2.02 to 2.20	5	—	—		2.0B	2.02 to 2.20	5	—	YES	
	2.2B	2.22 to 2.41	5	—	—		2.2B	2.22 to 2.41	5	—	YES	
	2.4B	2.43 to 2.63	5	—	—		2.4B	2.43 to 2.63	5	—	YES	
	2.7B	2.69 to 2.91	5	—	—		2.7B	2.69 to 2.91	5	—	YES	
	3.0B	3.01 to 3.22	5	—	—		3.0B	3.01 to 3.22	5	—	YES	
	3.3B	3.32 to 3.53	5	—	—		3.3B	3.32 to 3.53	5	—	YES	
	3.6B	3.600 to 3.845	5	YES	—		3.6B	3.600 to 3.845	5	YES	—	
	3.9B	3.89 to 4.16	5	YES	—		3.9B	3.89 to 4.16	5	YES	—	
	4.3B	4.17 to 4.43	5	YES	—		4.3B	4.17 to 4.43	5	YES	—	
	4.7B	4.55 to 4.75	5	YES	—		4.7B	4.55 to 4.75	5	YES	—	
	5.1B	4.98 to 5.20	5	YES	—		5.1B	4.98 to 5.20	5	YES	—	
	5.6B	5.49 to 5.73	5	YES	—		5.6B	5.49 to 5.73	5	YES	—	
	6.2B	6.06 to 6.33	5	YES	—		6.2B	6.06 to 6.33	5	YES	—	
	6.8B	6.65 to 6.93	5	YES	—		6.8B	6.65 to 6.93	5	YES	—	
	7.5B	7.28 to 7.60	5	YES	—		7.5B	7.28 to 7.60	5	YES	—	
	8.2B	8.02 to 8.36	5	YES	—		8.2B	8.02 to 8.36	5	YES	—	
	9.1B	8.85 to 9.23	5	YES	—		9.1B	8.85 to 9.23	5	YES	—	
	10B	9.77 to 10.21	5	YES	—		10B	9.77 to 10.21	5	YES	—	
	11B	10.76 to 11.22	5	YES	—		11B	10.76 to 11.22	5	YES	—	
	12B	11.74 to 12.24	5	YES	—		12B	11.74 to 12.24	5	YES	—	
	13B	12.91 to 13.49	5	YES	—		13B	12.91 to 13.49	5	YES	—	
	15B	14.34 to 14.98	5	YES	—		15B	14.34 to 14.98	5	YES	—	
	16B	15.85 to 16.51	5	YES	—		16B	15.85 to 16.51	5	YES	—	
	18B	17.56 to 18.35	5	YES	—		18B	17.56 to 18.35	5	YES	—	
	20B	19.52 to 20.39	5	YES	—		20B	19.52 to 20.39	5	YES	—	
	22B	21.54 to 22.47	5	YES	—		22B	21.54 to 22.47	5	YES	—	
	24B	23.72 to 24.78	5	YES	—		24B	23.72 to 24.78	5	YES	—	
	27B	26.19 to 27.53	2	YES	—		27B	26.19 to 27.53	5	YES	—	
	30B	29.19 to 30.69	2	YES	—		30B	29.19 to 30.69	5	YES	—	
	33B	32.15 to 33.79	2	YES	—		33B	32.15 to 33.79	5	YES	—	
	36B	35.07 to 36.87	2	YES	—		36B	35.07 to 36.87	5	YES	—	
	—	—	—	—	—		—	—	—	—	—	
	—	—	—	—	—		—	—	—	—	—	
	—	—	—	—	—		—	—	—	—	—	
	—	—	—	—	—		—	—	—	—	—	

Note: Packages in parenthesis () denotes ROHM's package type.
Click on the  icon to access the product page on ROHM's website.


More Information is Available on ROHM's website

Learn the basics

Electronics Basics

► What is a diode? [Zener Diodes](#)

Many products are listed in addition to long-selling products

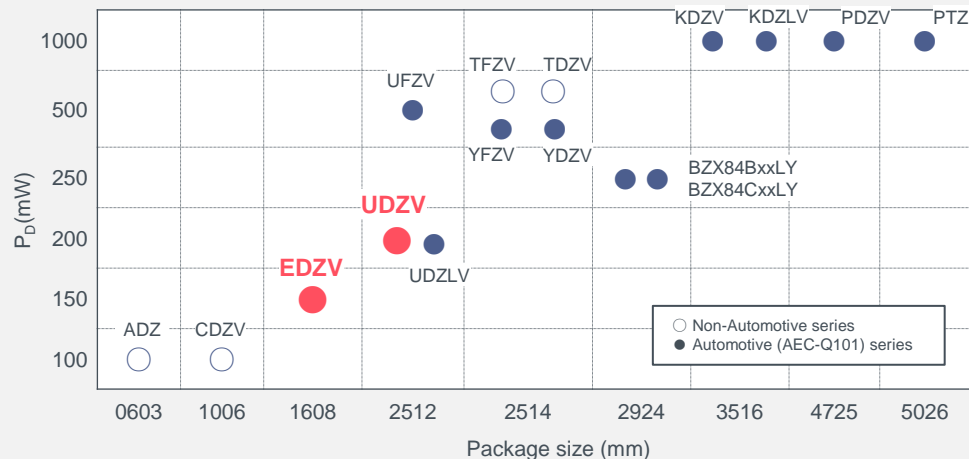

Lots of lineup (16series, 642models)

Detailed information on each product and series is available here

► [ROHM Zener Diodes](#)

With shipments totaling over 60 billion pcs, ROHM's long-selling small-signal discrete devices have enjoyed a long history in the market and boast a top-tier track record in the industry. Stable supply and production ensure worry-free adoption even in applications with long life cycles.

Features

- **Production for over 5 years (with over 60 billion pcs shipped) results in among the industry leading supply record**

Production is achieved using high quality, high efficiency lines developed through continuous investment in production equipment and improvements in production technology

- **Stable production ensured through a robust BCM system**

Based on a vertical integration strategy (also incorporating external production) makes it possible to hedge against various risks

- **ROHM's Product Longevity Program ensures worry-free adoption**

Can be adopted for applications with long life cycles, including industrial equipment

*ROHM study (as of 2022)

ROHM's Long-Selling Small-Signal Discrete Devices

Switching Diodes

1SS400SM
1SS355VM

Schottky Barrier Diodes

RB521SM-xx
RB520SM-xx

Zener Diodes

EDZV series
UDZV series

Bipolar Transistors

2SA1576U3
2SC4081U3

Digital Transistors

DTA1xxxU3
DTC1xxxU3


MOSFETs

RUM002N02
RSM002N06

Industry-Leading Supply Record with Total Shipments Exceeding 60 billion from Over 5 Years of Production ①




Long-Selling Small-Signal Discrete Devices: Shipment Trend

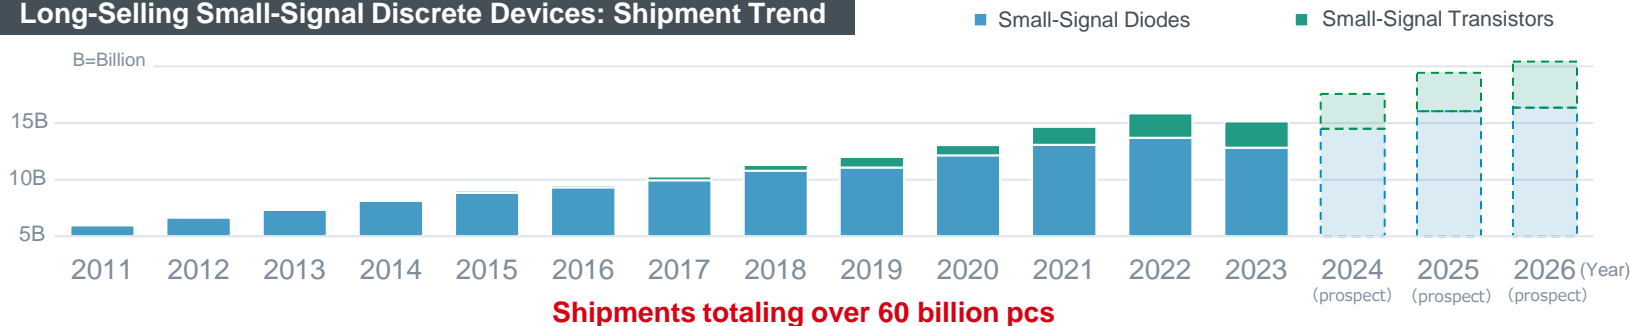


Continuing Investment in Production Facilities



Trend in Capital Investments

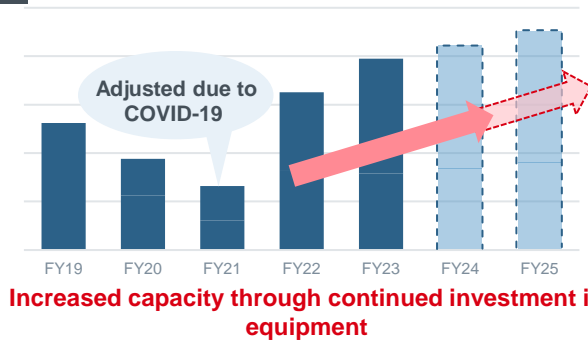

W/W Share of Small-Signal Discrete Devices

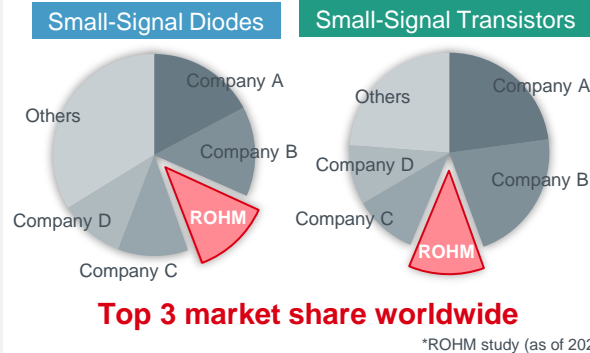

Continued investment in production facilities allows ROHM to secure a top 3 market share within the industry by establishing a top-tier track record for shipments

Industry-Leading Supply Record with Total Shipments Exceeding 60 billion from Over 5 Years of Production ②

Reducing Waste by Improving Production Methods

*SOD-323FL (UMD2)
Reduction per unit product

Conventional Method:
Hoop Line

New Method:
Wide Line

Frame waste

reduced **70%***

Resin waste

reduced **69%***

Increasing frame usage efficiency significantly reduces waste

Unified Material Specifications

Terminal Treatment

Dip (Sn3Ag0.5Cu)

Plating (100% Sn)

Improves solder wettability during mounting, extending the recommended product storage period (1→5 years)

Resin

Halogen

Halogen free


Eco-friendly products

SOT-323
(UMT3)

Note: Packages in parenthesis () denotes the ROHM package type.

Improved production technology allows us to achieve greater quality and manufacturing efficiency while minimizing environmental impact

Robust BCM System Ensures Stable Production

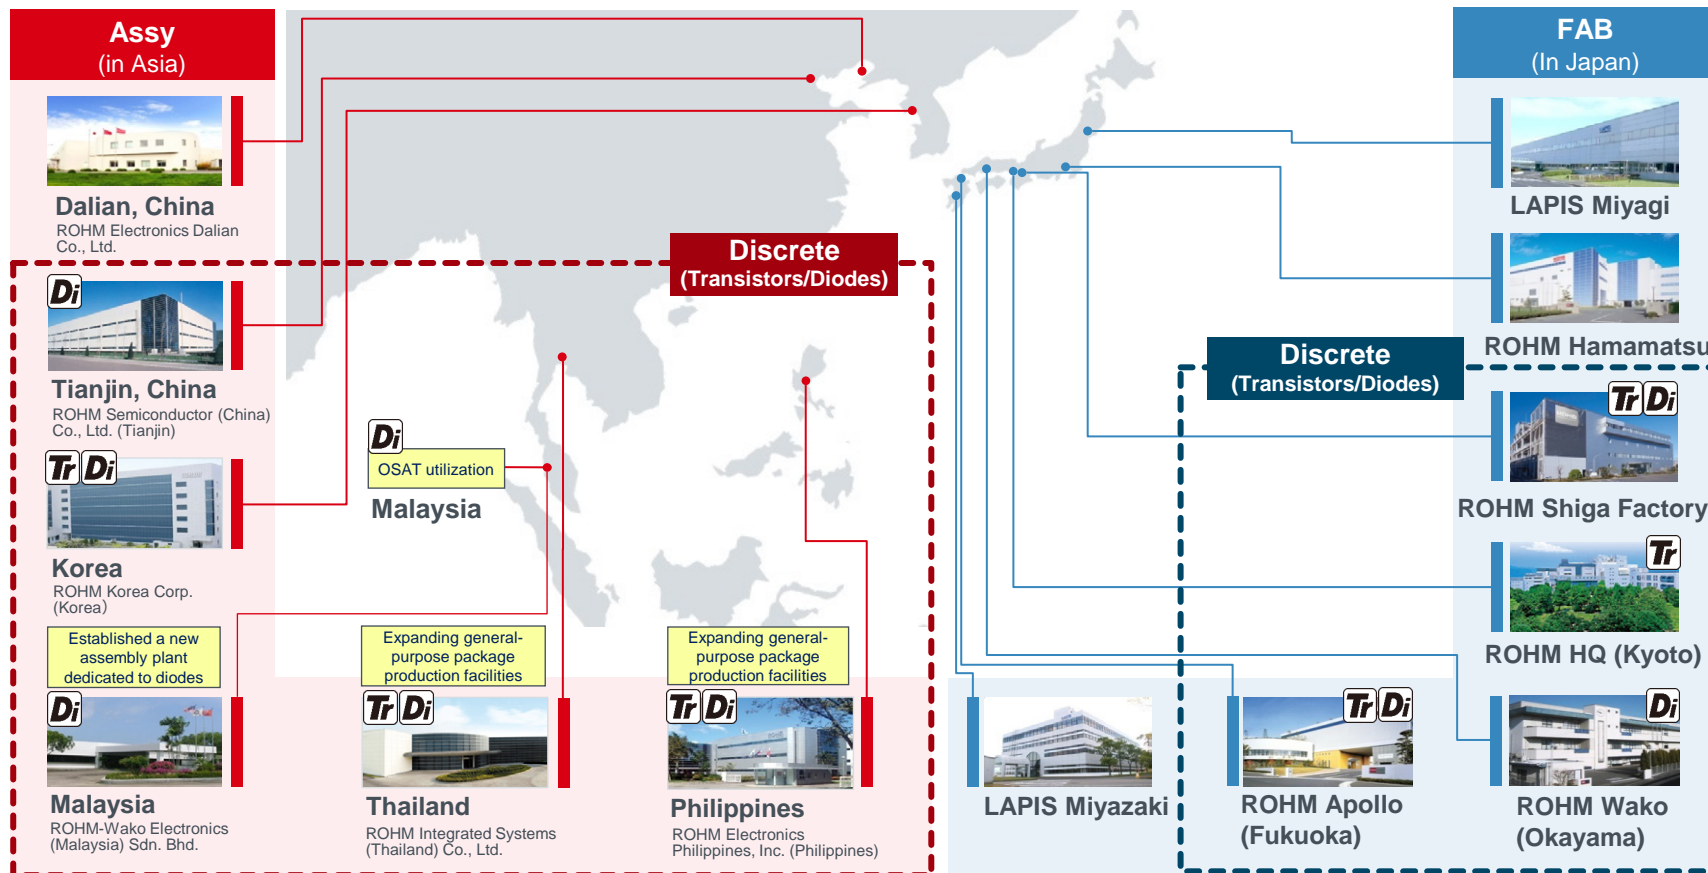

ROHM has established a robust BCM system that incorporates multiple production sites (including OSAT) based on a vertical integration strategy to hedge against various risks

Product Longevity Program (PLP)

A supply period of 10 to 20 years is established for products requiring long-term supply, with relevant information regarding supply status and estimated supply duration posted on ROHM's website.

Long-selling small discrete diodes and transistors are also eligible under the Product Longevity Program.

Small-Signal Discrete Devices (Long-Selling Products)

Product Category	Part Number	Features	Support Period (Year)
Switching Diodes	1SS355VM	High-speed 80V/100mA switching diode	10
Switching Diodes	1SS400SM	High-speed 80V/100mA switching diode	10
Zener Diodes	UDZV10B	200mW/10V SOD-323FL Zener diode	10
Zener Diodes	EDZV10B	150mW/10V SOD-523 Zener diode	10
Schottky Barrier Diodes	RB520SM-30	30V/200mA SOD-523 Schottky barrier diode	10
Schottky Barrier Diodes	RB521SM-30	30V/200mA SOD-523 Schottky barrier diode	10
Schottky Barrier Diodes	RB520SM-40	40V/200mA SOD-523 Schottky barrier diode	10
Schottky Barrier Diodes	RB521SM-40	40V/200mA SOD-523 Schottky barrier diode	10
Bipolar Transistors	2SC4081U3	NPN SOT-323 50V/150mA general small-signal amplification transistor	10
Bipolar Transistors	2SA1576U3	PNP SOT-323 -50V/-150mA general amplification transistor	10
Digital Transistors	DTC113ZU3	NPN SOT-323 R1#R2 digital transistor (with internal bias resistor)	10
Digital Transistors	DTA113ZU3	PNP SOT-323 R1#R2 digital transistor (with internal bias resistor)	10
12 to 150V MOSFETs	RUM002N02	1.2V drive type Nch MOSFET	10
12 to 150V MOSFETs	RSM002N06	2.5V drive type Nch MOSFET	10

As of July 2023

ROHM long-selling small-signal discrete devices can be confidently adopted in applications with long life cycles

Di Diodes

Switching Diodes

- ✓ Easily replace competitor products

Long-selling

1SS400SM, 1SS355VM

Schottky Barrier Diodes

- ✓ Development tailored to customer demands

Long-selling

RB521SM-xx, RB520SM-xx

Zener Diodes

- ✓ Lots of Vz lineup

Long-selling

EDZV/UDZV series

Tr Transistors

Bipolar Transistors

- ✓ Superior h_{FE} characteristics

Long-selling

2SA1576U3, 2SC4081U3

Digital Transistors

- ✓ Pioneered by ROHM

Long-selling

DTA1xxxU3/DTC1xxxU3 series

MOSFETs

- ✓ Compatible with low 1.2V drive

Long-selling

RUM002N02, RSM002N06

Notice

- The information contained in this document is intended to introduce ROHM Group (hereafter referred to as ROHM) products. When using ROHM products, please verify the latest specifications or datasheets before use.
- ROHM does not warrant that the information contained herein is error-free. ROHM shall not be in any way responsible or liable for any damages, expenses, or losses incurred by you or third parties resulting from errors contained in this document.
- The information and data described in this document, including typical application circuits, are examples only and are not intended to guarantee to be free from infringement of third parties intellectual property or other rights. ROHM does not grant any license, express or implied, to implement, use, or exploit any intellectual property or other rights owned or controlled by ROHM or any third parties with respect to the information and data contained herein.
- When exporting ROHM products or technologies described in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, such as the Foreign Exchange and Foreign Trade Act and the US Export Administration Regulations, and follow the necessary procedures in accordance with these provisions.
- No part of this document may be reprinted or reproduced in any form by any means without the prior written consent of ROHM.
- The information contained in this document is current as of October 2023 and is subject to change without notice.



ROHM Co.,Ltd.

21 Saiin Mizosaki-cho, Ukyo-ku,
Kyoto 615-8585 Japan

www.rohm.com